




RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


IMPORTANT

1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Do not install in wet locations. For dry and damp use only.
5. Turn off electrical power before installing or servicing fixture in any way.
6. To reduce the risk of fire and overheating, make sure all connections are tight.
7. Under no circumstances can the lighting fixture be covered with heat insulation gasket or similar materials.
8. The maximum connection of each input line is 40FT (1200CM) in 120AC and 100FT (3000CM) in 277AC.


ACCESSORY




A Butterfly Drywall Anchor




B Wire Nut




C Screw




D Square plate
(Optional accessory)
Note: Square plate is compatible with 4" octagon, 4" round, 4" square and 2x4" rectangle junction boxes.



E Anchor




F Screw



G Screw


WIRING

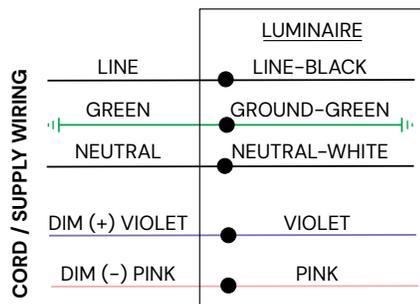

Please isolate two dimming wires by P2 terminal individually if no need dimming; Must connect wires with corresponding colors as shown.

PRE-INSTALLATION

Assemble Power Cord

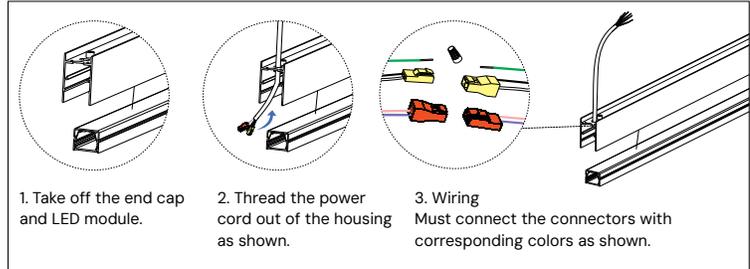


1. Take off the end cap and LED module.

2. Thread the power cord out of the housing as shown.


3. Wiring
Must connect the connectors with corresponding colors as shown.

INDEPENDENT INSTALLATION

1 Prepare mounting point in the ceiling

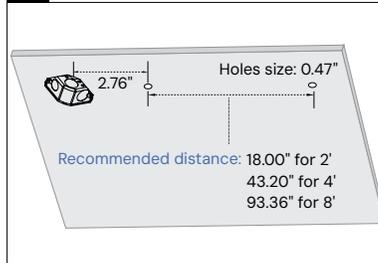

2 Mount plate and wiring

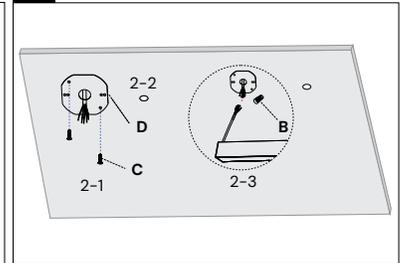


2-1: Cover the junction box with the square plate "D" and fix it with the screw "C", then plaster the area.

2-2: Use the wire nut "B" to connect the AC and dimming wires.

2-3: Hide all wires into the junction box.

3 Screw the housing in the ceiling

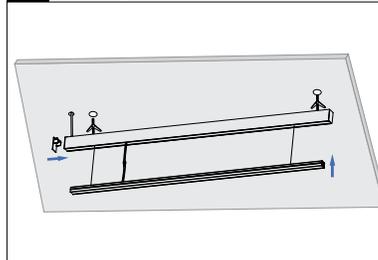


3-1: Fix the housing in the ceiling with butterfly drywall anchor "A".
Remark : Fix the housing with screws "G" if wooden frame ceiling. Fix the housing with anchor "E" and Screws "G" if cement drywall.

3-2: Press the LED modular into housing.

3-3: Use glass cement on the end cap, then insert it into the housing.


4 Complete

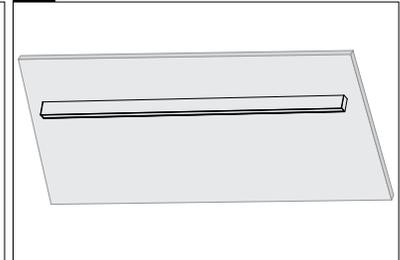



RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

JOINER OPTIONS

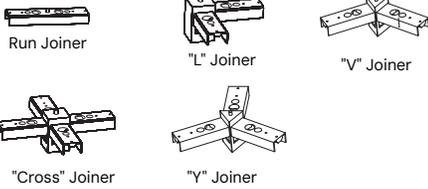

Note: It needs 2 inputs if using "cross" and "Y" joiner.


ACCESSORY




Note: Silicone seal is used to seal seams that may appear at both ends of luminaires when multiple connections.

BEFORE CONNECTING

Disassemble Luminaires

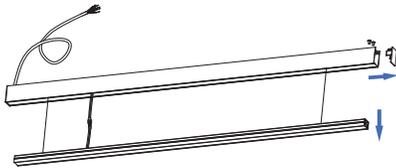

Start of run (SoR):
Remove the end cap without the power cord and take the LED module out.

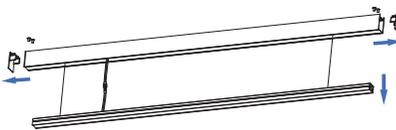

Middle of run (MoR):
Remove both end caps and take the LED module out.




End of run (EoR):
Remove the end cap without the power cord and take the LED module out.


MULTIPLE LUMINAIRES CONNECTION

LINE CONNECTION

1 Prepare mounting point in the ceiling

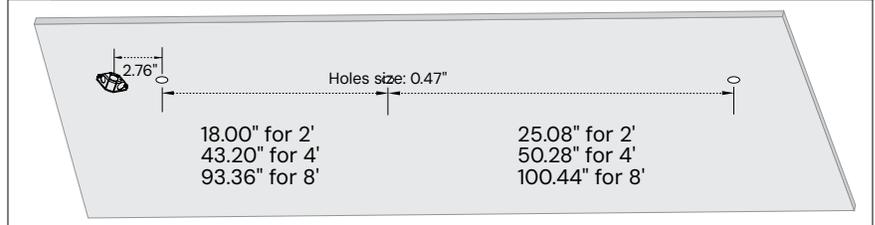


2 Mount plate and wiring

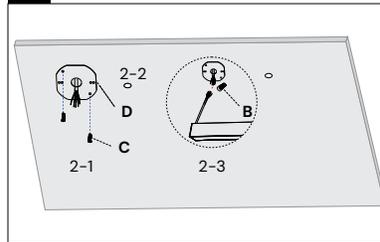


2-1: Cover the junction box with the square plate "D" and fix it with screw "C", then plaster the area.
2-2: Use the wire nut "B" to connect the AC and dimming wires.
2-3: Hide all wires into the junction box.

3 Install the housing and joiner – SoR

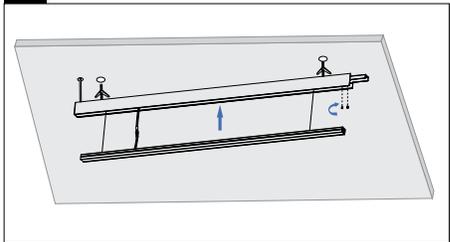


3-1: Fix the housing in the ceiling with butterfly drywall anchor "A".
Remark: Fix the housing with screws "G" if wooden frame ceiling. Fix the housing with anchor "E" and screws "G" if cement drywall.
3-2: Insert the run joiner into the SoR housing and fix it with the screws.

4 Repeat Hang and join steps – MoR to EoR

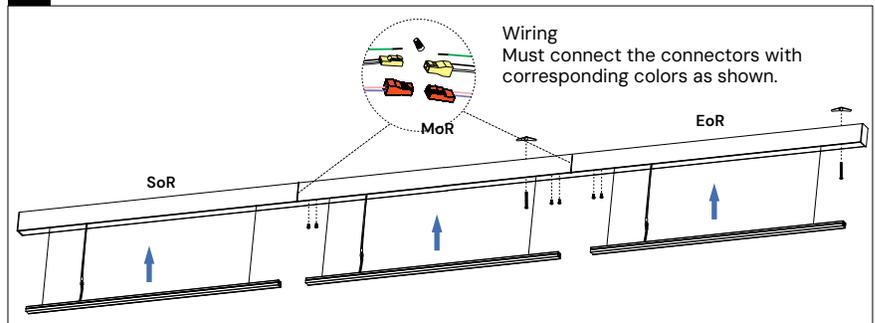

4-1: Fix the housing in the ceiling in turn.
4-2: Insert the run joiner into the housing and fix it with screws one by one.
4-3: Connect the quick connectors properly.
4-4: Insert all the LED modules into the housing from SoR to EoR in turn.

5 Complete

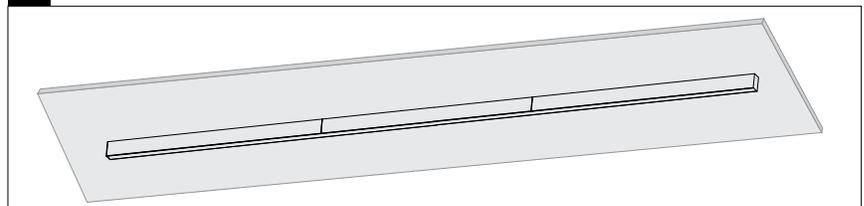




RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

L SHAPE CONNECTION




For "cross" and "Y" shape or other geometric shapes, take into consideration they are all subject to the "L" shape installation. It needs 2 inputs if using "cross" and "Y" joiner.


1 Make hole in the ceiling

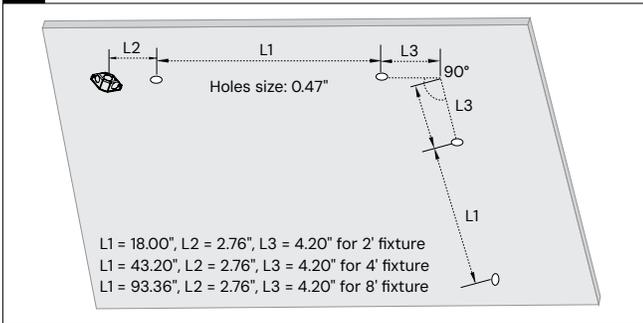

2 Mount plate and wiring

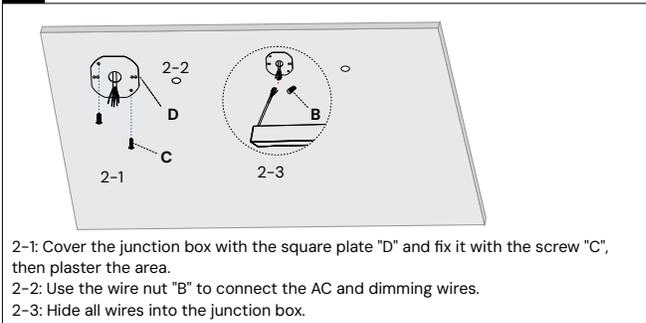


3 Install the housing and joiner – SoR

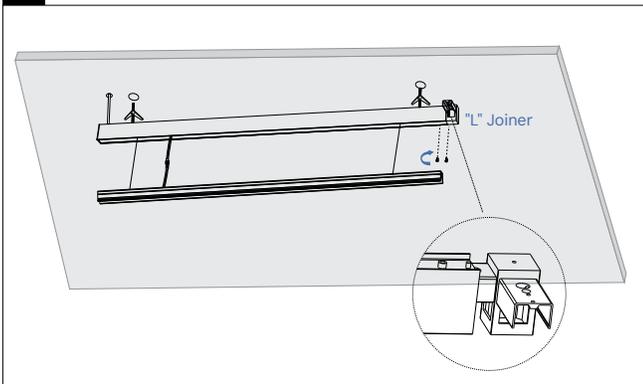

3-1: Fix the housing in the ceiling with butterfly drywall anchor "A".
 Remark: Fix the housing with screws "G" if wooden frame ceiling. Fix the housing with anchor "E" and Screws "G" if cement drywall.
 3-2: Insert the "L" joiner into the SoR housing and fix it with the screws.

4

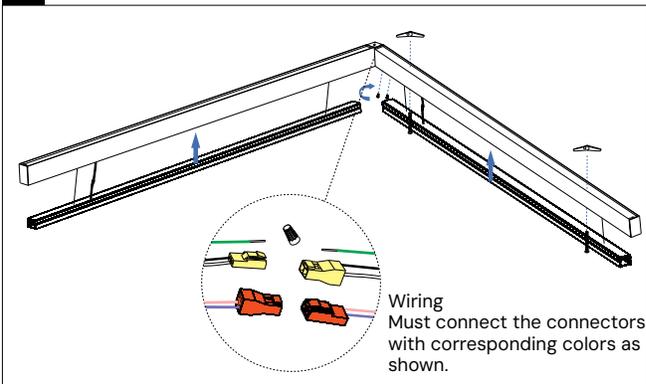

4-1: Fix the housing in the ceiling in turn.
 4-2: Insert the "L" joiner into the housing and fix it with screws one by one.
 4-3: Connect the quick connectors properly.
 4-4: Insert all the LED modules into the housing from SoR to EoR in turn.

5 Complete

