




RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


IMPORTANT

1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Do not install in wet locations. For dry and damp use only.
5. Turn off electrical power before installing or servicing fixture in any way.
6. To reduce the risk of fire and overheating, make sure all connections are tight.
7. Under no circumstances can the lighting fixture be covered with heat insulation gasket or similar materials.
8. The maximum connection of each input line is 40FT (1200CM) in 120AC and 100FT (3000CM) in 277AC.


ACCESSORY




Wire Nut




Square plate
(Optional accessory)
Note: Square plate is compatible with 4" octagon, 4" round, 4" square and 2x4" rectangle junction boxes.




Anchor




Screw



Screw




Screw

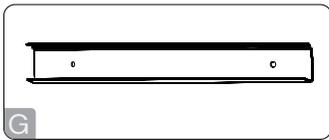

Wall Mounting Bracket


WIRING

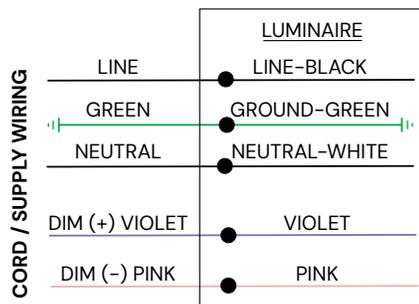

Please isolate two dimming wires by P2 terminal individually if no need dimming; Must connect wires with corresponding colors as shown.

INDEPENDENT INSTALLATION


1 Assemble Power Cord

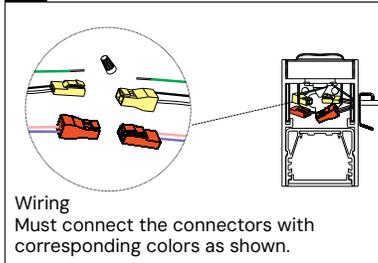


Wiring
Must connect the connectors with corresponding colors as shown.

Take off the end cap and the LED module and thread the power cord out of the housing as shown.
Wire and remount the LED module with end cap.

2 Install mounting point on wall

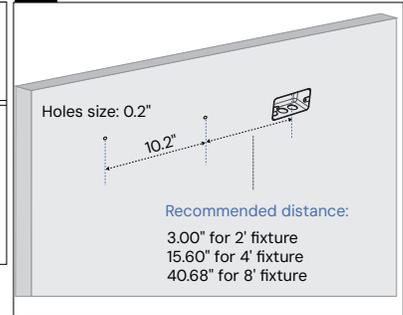


3 Install plate and bracket

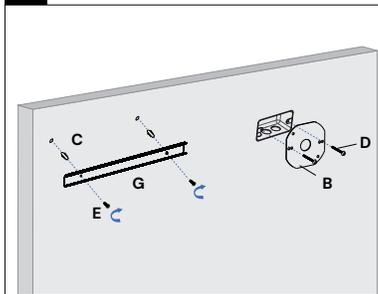


3-1: Insert Anchor "C" into hole and fix the wall mounting bracket "G" with screw "E".
3-2: Mount the square cover plate "B" onto J-box with screw "D", then plaster the area.

4 Wiring

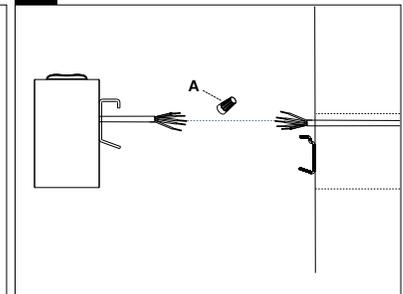


4-1: Use the wire nut "A" to connect the AC and dimming wires.
4-2: Hide all wires into the junction box.

5 Mounting

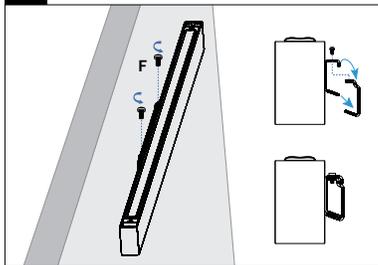

Match the hole position of the fixture and "wall mounting bracket" and mount the fixture onto wall with the screw "F".

6 Complete

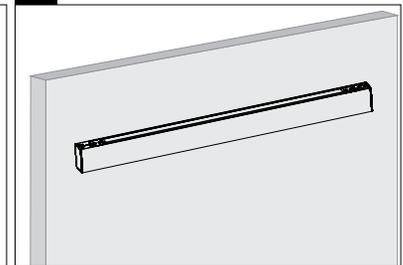



RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

JOINER OPTIONS & ACCESSORY



Run Joiner




Silicone Seal

Note: Silicone seal is used to seal seams that may appear at both ends of luminaires when multiple connections.


BEFORE CONNECTING

Disassemble Luminaires

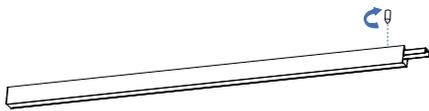

Start of run (SoR):

Remove the end cap without power cord and insert the joiner to fix it with a screw.

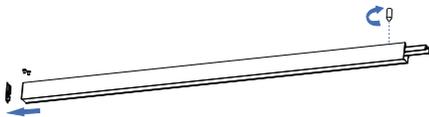

Middle of run (MoR):

Remove both end caps, insert the joiner and fix it with a screw.




End of run (EoR):


Remove the end cap without power cord and insert the joiner to fix it with a screw.

MULTIPLE LUMINAIRE CONNECTION


1 Install mounting point on wall

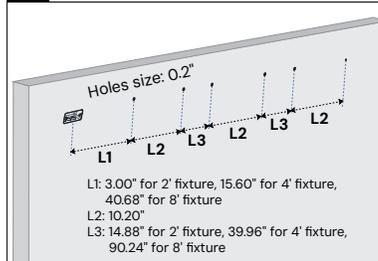

2 Install plate and from SoR to EoR

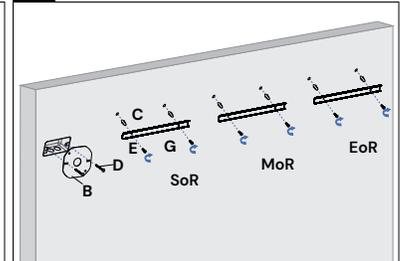


3 Wiring – SoR

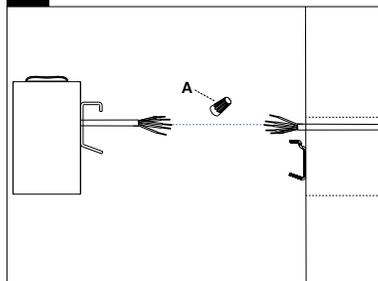


3-1: Use the wire nut "A" to connect the AC and dimming wires.
 3-2: Hide all wires into the junction box.

4 Mounting

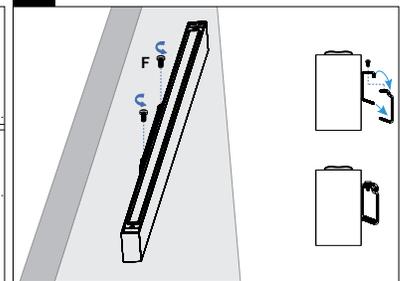


Match the hole position of the fixture and "wall mounting bracket", and mount the fixture onto wall with the screw "F".

5 Repeat install and join steps – MoR to EoR

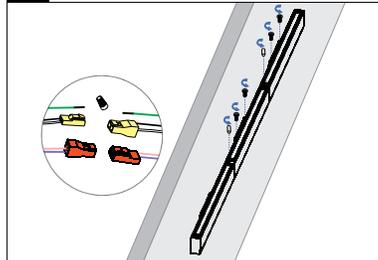

6 Complete

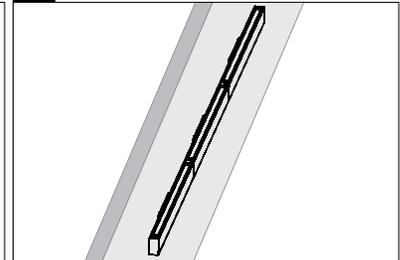

Wiring
 Must connect the connectors with corresponding colors as shown.