

Project Name: _____ Type: _____ Quantity: _____

FIXTURE SPECIFICATIONS

INTENDED USE

This round commercial-grade light fixture is die-formed in 20-gauge spun steel. An architectural Light-Emitting Diode (LED) fixture with added durability featuring Bluetooth and wireless Mesh technology and a vandal-resistant design, our recessed light offers top quality, high performance and endurance. The light, which includes dimming function, may be purchased in a variety of lengths and finishes. Offering direct or indirect uplight, the 12201 is designed for versatility and performance in today's office, classroom, conference room, museum, retailer, hotel and restaurant.

FEATURES

Construction: 2-Piece, Die-formed, 20-Gauge spun steel.

Lens: Glare-free flat white acrylic diffuser for even distribution.

Voltage: 120-277

Dimming: 0-10V

CRI: 80+

Power Factor: > 0.90

THD: < 20%

Ambient Operating Temperature: -26°F to +110°F

(-32°C to +43°C)

Life: 100,000 Hours (L70)

Warranty: 10 Years



ORDERING INFORMATION Example: (12201-S-2-LD44-LU15-30K-WH-AC4-F)

Model	Mounting	Size	Lumen (Down)	Lumen (Up) ²	Color Temp	Finish	Mounting Hardware	Options	
12201 Skyline	P Pendant S Surface R Recessed	1 14"	LD17 1760 lms 20 watts	Blank Indirect not available for 14"	27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	MWH Standard Matte White GWH Gloss White RAL -XXXX (To Specify: Use RAL # found on Page 2)	Blank None Required	EM ⁵ Emergency Backup Battery	
			LD22 2200 lms 25 watts						AC4 4ft Straight Aircraft Cable AC8 8ft Straight Aircraft Cable AC15 15ft Straight Aircraft Cable AC20 20ft Straight Aircraft Cable
			LD35 3520 lms 40 watts						
	2 24"	LD31 3520 lms 40 watts	LU15 1760 lms 20 watts	MP4 4ft Monopoint Cable MP8 8ft Monopoint Cable MP15 15ft Monopoint Cable MP20 20ft Monopoint Cable					
	LD44 4840 lms 55 watts	LU20 2200 lms 25 watts							
	LD64 7040 lms 80 watts	LU32 3520 lms 40 watts							
	3 36"	LD70 7040 lms 80 watts	LU31 3520 lms 40 watts	ST2 ⁴ 2ft Stem ST3 ⁴ 3ft Stem ST4 ⁴ 4ft Stem ST5 ⁴ 5ft Stem ST6 ⁴ 6ft Stem ST8 ⁴ 8ft Stem					
	LD88 8800 lms 100 watts	LU44 4840 lms 55 watts							
	LD105 10560 lms 120 watts	LU64 8800 lms 100 watts							
	4 48"	LD101 10120 lms 115 watts	LU64 7040 lms 80 watts						
	LD118 11880 lms 135 watts	LU80 8800 lms 100 watts							
	LD136 13640 lms 155 watts	LU95 10560 lms 120 watts							
	5 60"	LD162 13640 lms 155 watts	LU92 10120 lms 115 watts						
		LD188 15400 lms 175 watts	LU125 11880 lms 135 watts						
		LD207 17160 lms 175 watts	LU168 13640 lms 155 watts						




¹ Only Available in Direct Downlight.
² Indirect Lighting available only for Suspended 2ft, 3ft, 4ft, 5ft.
³ Only Available for Recessed Mount in addition to Flat Lens.
⁴ Only Available for Direct models.
⁵ Not available for 14". EM for 2FT = 8W. EM for 3FT and larger = 16W

Custom Finishes

Standard

	01	White	RAL #9003
	02	Black	RAL #9011
	03	Silver	RAL #9022
	04	Crystal White	RAL #9010
	05	Natural Aluminum	RAL #7035
	06	Hampden	RAL #9001
	07	London	RAL #7044


Metropolitan

	08	Urban Native	RAL #8025
	09	Military Green	RAL #6011
	10	Carmin	RAL #8028
	11	Chocolate Spice	RAL #8017
	12	Asher Grey	RAL #7004
	13	Tech Grey	RAL #7016
	14	Slate	RAL #7031
	15	Mason	RAL #7039

Vibrant


	16	Violet Dreams	RAL #4006
	17	Sangria Sunset	RAL #2004
	18	Deep Pink	RAL #4010
	19	Ruby Red	RAL #3027
	20	Island Skye	RAL #6027
	21	Sophia	RAL #5015
	22	Antique Spring	RAL #6019
	23	Daisy	RAL #1018
	24	Gun Metal	RAL #7024

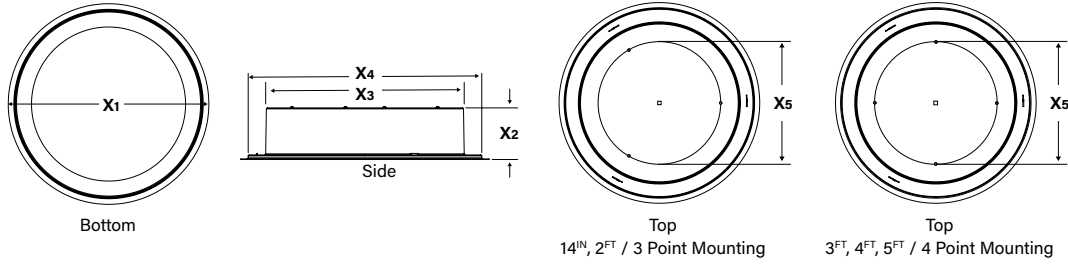

KEYS
RECESSED


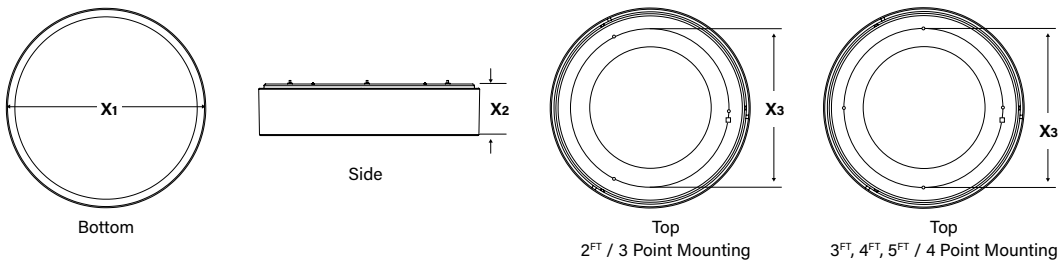
Size	14IN	2FT	3FT	4FT	5FT
Trim Diameter - X_1	18.3"	31.3"	41"	52"	63.8"
Height - X_2	6.5"	6.5"	7.6"	7.9"	8.3"
Recessed Clearance A - X_3	13"	25"	34.8"	45.8"	57"
Recessed Clearance B - X_4	16.4"	29.4"	39.2"	50.2"	62"
Mounting - X_5	10.3"	19"	26"	36"	47"

KEY	
	Power Feed
	Mounting

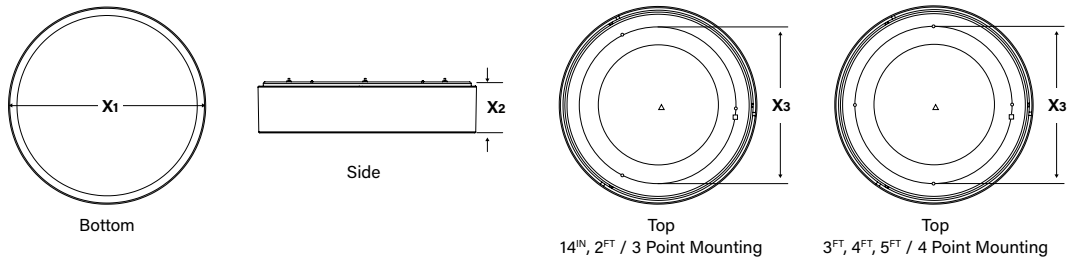SUSPENDED DIRECT, SURFACE


Size	14IN	2FT	3FT	4FT	5FT
Diameter - X_1	14"	26.3"	36.2"	47.2"	59"
Height - X_2	3.7"	4.8"	4.8"	5.1"	5.2"
Mounting - X_3	10.3"	19"	26"	36"	47"
Weight (lbs)	10	45	70	90	110

KEY	
	Power Feed for Mono, Surface, Stem
	Power Feed for Aircraft Cable
	Mounting

SUSPENDED DIRECT-INDIRECT


Size	2FT	3FT	4FT	5FT
Diameter - X_1	26.4"	36.2"	47.2"	59"
Height - X_2	4.8"	4.8"	5.1"	5.2"
Mounting - X_3	7.3"	8.5"	8.7"	9.1"
Weight (lbs)	55	85	110	135

KEY	
	Power Feed
	Mounting

COLOR TEMPERATURE GUIDE



2700K	3000K	3500K	4000K	5000K
WARM WHITE	SOFT WHITE GLOW	NEUTRAL GLOW	DAYLIGHT GLOW	CRYSTAL WHITE GLOW
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
✓	✓	✓	✓	✓