



RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

IMPORTANT

1. Read all instructions.
2. Install following national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Do not install in wet locations, for dry and damp use only.
5. Turn off electrical power before installing or servicing the fixture in any way.
6. To reduce the risk of fire and overheating, ensure all connections are tight.
7. Under no circumstances can the lighting fixture be covered with a heat insulation gasket or similar materials.

WIRING

	LUMINAIRE	
LINE	●	LINE-BLACK
GREEN	●	GROUND-GREEN
NEUTRAL	●	NEUTRAL-WHITE
DIM (+) VIOLET	●	VIOLET
DIM (-) PINK	●	PINK

SHOCK HAZARD




May result in serious injury or death. Turn power OFF at circuit breaker prior to installation or servicing.



Please isolate two dimming wires by P2 terminal individually if no need dimming; Must connect wires with corresponding colors as shown.


INSTALLATION

Wall Mounting

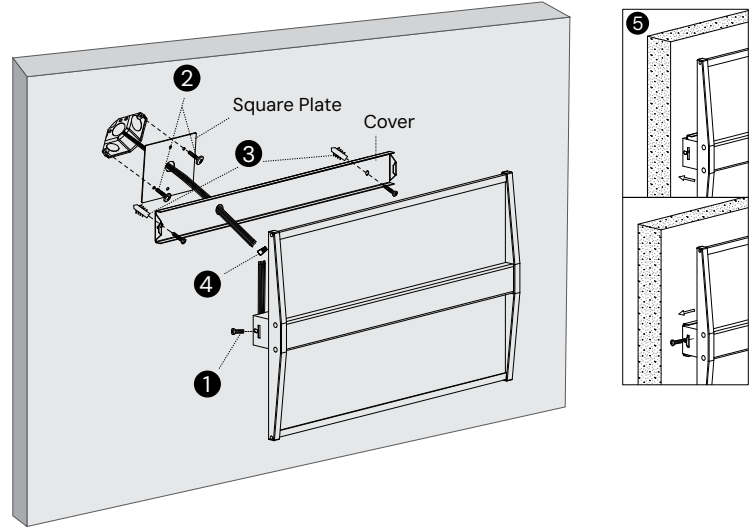


1. Use a screwdriver to remove the cover of the driver box.
2. Thread the power cord from the junction box through the driver box cover and the square plate. Secure the square plate cover to the junction box with screws, then apply plaster as needed.
3. Fix the driver box cover to the wall with screws.
4. Connect the power cable wires to the junction box wires using the provided wiring caps, ensuring all wires are tucked neatly inside the junction box.
5. Attach the luminaire to the driver box cover with screws, following the diagram for proper placement.


ACCESSORY




Wire Nut




Anchor



Screw PA4X30



Screw CM4X12



Square Plate



RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

IMPORTANT

1. Read all instructions.
2. Install following national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Do not install in wet locations, for dry and damp use only.
5. Turn off electrical power before installing or servicing the fixture in any way.
6. To reduce the risk of fire and overheating, ensure all connections are tight.
7. Under no circumstances can the lighting fixture be covered with a heat insulation gasket or similar materials.

WIRING

LUMINAIRE	
LINE	LINE-BLACK
GREEN	GROUND-GREEN
NEUTRAL	NEUTRAL-WHITE
DIM (+) VIOLET	VIOLET
DIM (-) PINK	PINK

SHOCK HAZARD




May result in serious injury or death. Turn power OFF at circuit breaker prior to installation or servicing.



Please isolate two dimming wires by P2 terminal individually if no need dimming; Must connect wires with corresponding colors as shown.

INSTALLATION


Surface Mounting

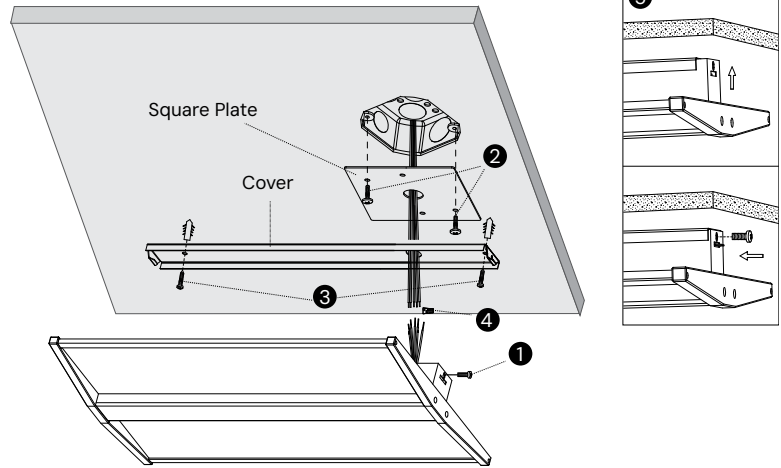

1. Use a screwdriver to remove the cover of the driver box.
2. Thread the power cord from the junction box through the driver box cover and the square plate. Secure the square plate cover to the junction box with screws, then apply plaster as needed.
3. Fix the driver box cover to the wall with screws.




Hole Diameter: 0.20"




Hole Diameter: 0.47"

4. Connect the power cable wires to the junction box wires using the provided wiring caps, ensuring all wires are tucked neatly inside the junction box.
5. Attach the luminaire to the driver box cover with screws, following the diagram for proper placement.


ACCESSORY




Wire Nut




Anchor




Screw PA4X30



Screw CM4X12



Butterfly Drywall Anchor



Square Plate




RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

IMPORTANT


1. Read all instructions.
2. Install following national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Do not install in wet locations, for dry and damp use only.
5. Turn off electrical power before installing or servicing the fixture in any way.
6. To reduce the risk of fire and overheating, ensure all connections are tight.
7. Under no circumstances can the lighting fixture be covered with a heat insulation gasket or similar materials.
8. Supports up to 10 sconce fixtures with 120V AC power, and up to 20 fixtures with 277V or 347V AC power.

WIRING

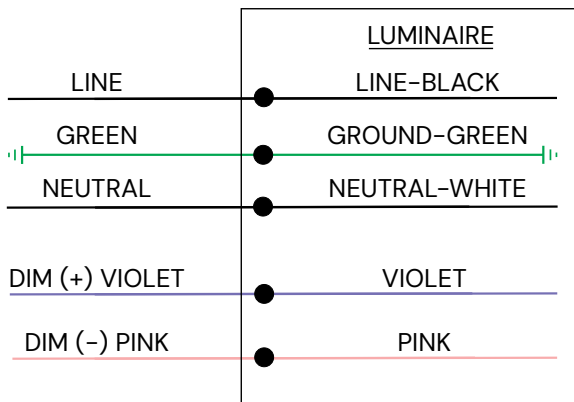

INSTALLATION PENDANT MOUNTING


Hard Drywall Ceiling

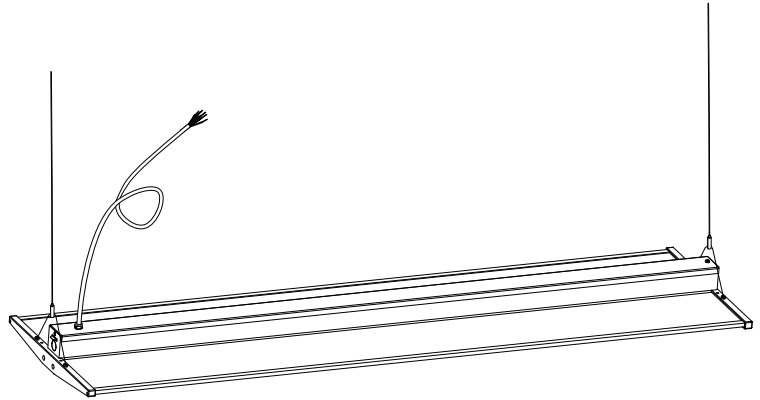

SHOCK HAZARD



May result in serious injury or death. Turn power OFF at circuit breaker prior to installation or servicing.




After the final building cleanup is complete, remove any remaining protective film from the lens.




RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

INSTALLATION PENDANT MOUNTING

Hard Drywall Ceiling

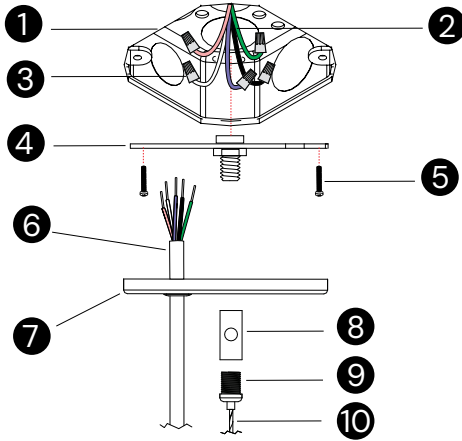


Power Feed

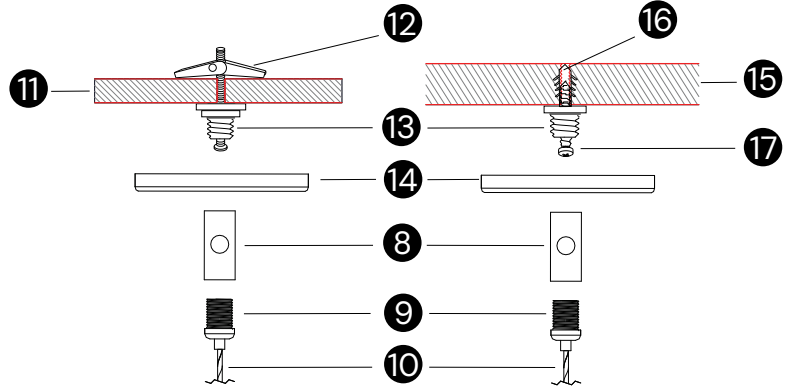


Non-Power Suspension

Part List


- ① 4" Octagon Junction Box (By Others)
- ② Power Cord (By Others)
- ③ Wire Nut
- ④ Junction Box Crossbar
- ⑤ Screw PM4*22
- ⑥ Power Cord
- ⑦ 4" Power Canopy Kit
- ⑧ Cable Holder
- ⑨ Strain Relief Thread Nut
- ⑩ Aircraft Cable
- ⑪ Drywall Ceiling (By Others)
- ⑫ Butterfly Drywall Anchor
- ⑬ Crimp Stud
- ⑭ 2" Canopy
- ⑮ Solid Ceiling (By Others)
- ⑯ Anchor
- ⑰ Screw PA4*30




Wire Nut




Junction Box Crossbar




Screw PM4*22




Power Cord




4" Power Canopy Kit




Cable Holder




Strain Relief Thread Nut




Aircraft Cable




Butterfly Drywall Anchor




Crimp Stud



2" Canopy



Anchor




Screw PA4*30



RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


INSTALLATION PENDANT MOUNTING

Grid Ceiling

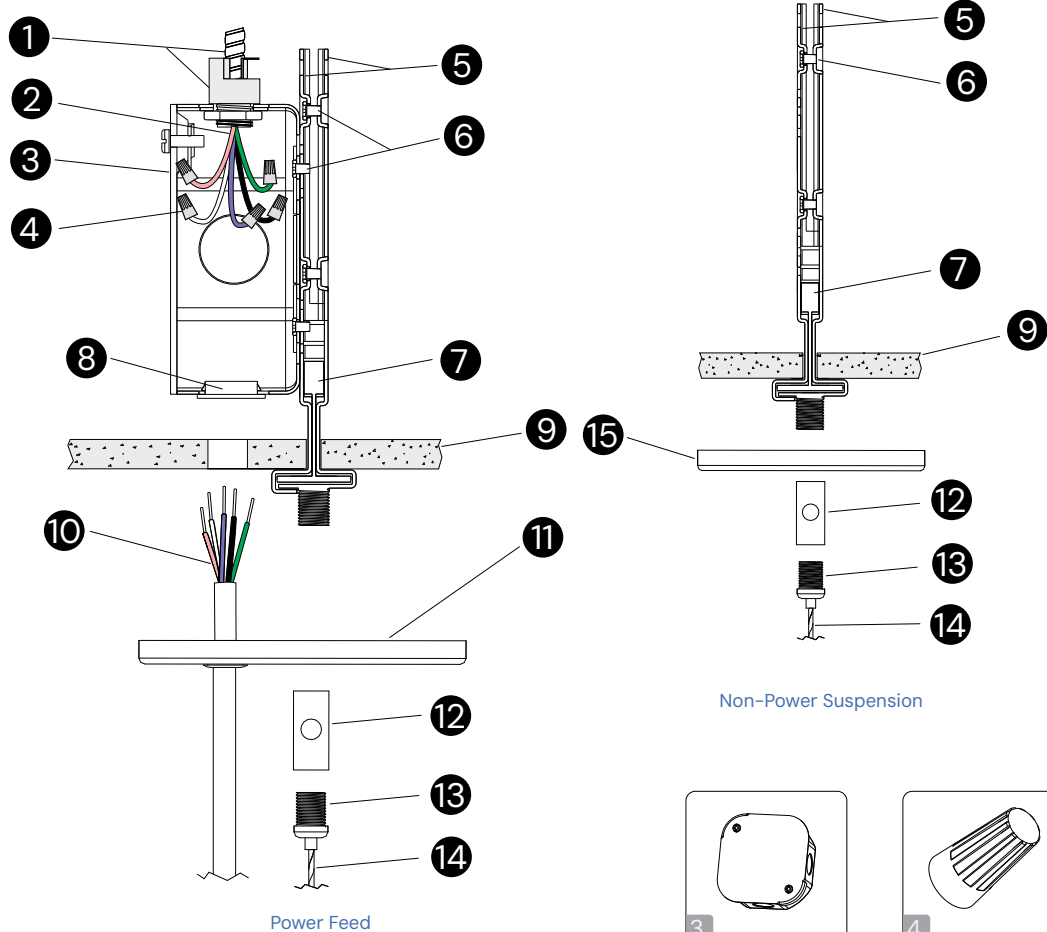


Part List


- ① Armored Cable & Connector (By Others)
- ② Power Cord (By Others)
- ③ 4" Octagon Junction Box
- ④ Wire Nut
- ⑤ Assembled T-grid Clips
- ⑥ Screw 6#*4
- ⑦ T-grid (By Others)
- ⑧ Plastic Grommet
- ⑨ Ceiling Tile (By Others)
- ⑩ Power Cord
- ⑪ 4" Canopy Power Feed
- ⑫ Cable Holder
- ⑬ Strain Relief Thread Nut
- ⑭ Aircraft Cable
- ⑮ 2" Canopy




Assembled T-grid Clips




4" Octagon Junction Box




Wire Nut




Screw 6#*4




Plastic Grommet




Power Cord




4" Canopy Power Feed




Cable Holder



Strain Relief Thread Nut



Aircraft Cable




2" Canopy



RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

INSTALLATION PENDANT MOUNTING


Grid Ceiling

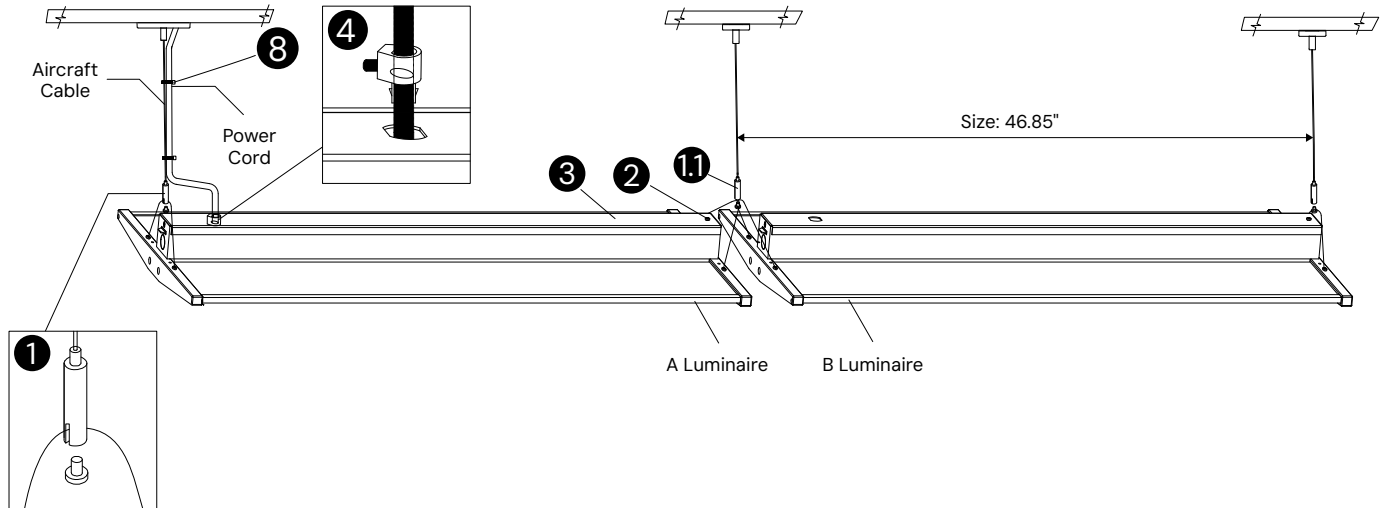


Installation Steps

1. Fix the aircraft cable to the luminaire with screws provided. **1**
If joining, fix the aircraft cable to both luminaires with screw as shown. **11**
2. Open the driver box. **2** **3**
Put through the power cord to the driver box cover and fix. **4**
3. Wiring.


If joining:

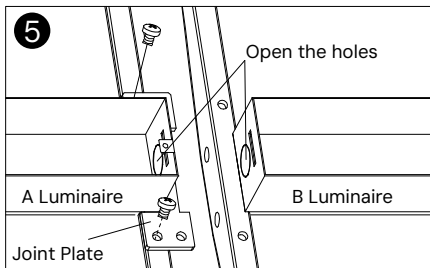

Knock out the necessary holes on both luminaires. Secure the joint plate to Luminaire A using screws.

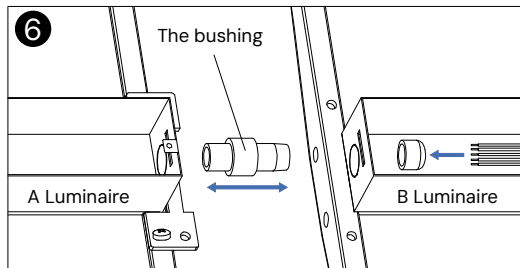

Connect Luminaire A and Luminaire B together using the bushing.

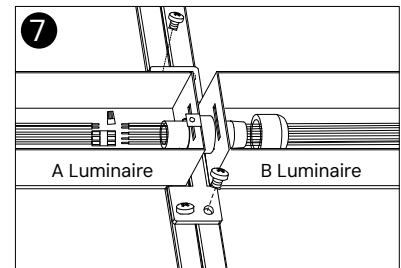

Pass the power cord from Luminaire B through to Luminaire A, and connect the wires properly. Then, secure the joint plate to Luminaire B with screws.

4. Adjust the height of luminaire.
Zip tight power cord and aircraft cable with the cable tie. **8**
Close the driver box.



Adjust the height of luminaire. Luminaire can be raised by pulling cable through the gripper and can be lowered by depressing the top cylinder on the gripper which pulls the luminaire down.