

## 6" T5 CYLINDER WITH DOWNLIGHT

**DELRAY**  
LIGHTING  
INCORPORATED

6300-6" T5



**TYPE:**

**PROJECT:**

**ORDER NUMBER:**

Model#	Wattage	Finish	Voltage	Ballast	Downlight
14		<b>S</b> -silver	<b>1</b> -120V	<b>SD3</b> -dimming	<b>B6MR16</b>
21		<b>W</b> -white	<b>2</b> -277V	<b>SD5</b> -dimming	
24				<b>SD8</b> -dimming	
28				<b>SD9</b> -dimming	
39					
54					

**Example:**

6313	54	W	2	D3	B6MR16
------	----	---	---	----	--------

**Other Options**

**BLA**-pipe mount

**B6XP**-extra cord length  
(inches):

### CONSTRUCTION

- Matte white acrylic diffuser provides even illumination.
- cUL listed for damp locations.

### CANOPY

- **W**-white or **S**-silver, with matching cord.
- Flat, 4.4" o.d. Mounts to standard J-box.
- Standard mount is 6 ft. power cord. Order **B6XP** for extra power cord length.
- Hard stem also available. Order **BLA**.

### BALLASTS

- Ballasts are program start, HPF electronic, mounted to internal socket/ballast housing, accessible through diffuser.
- See back page for dimming options.
- Emergency not available.


### OPTIONAL DOWNLIGHT

- Order **B6MR16**.
- 9W max.
- Uses LED MR16 2-pin lamps (by others).

**6311**-2 ft. T5, 2x 14/24W

**6312**-3 ft. T5, 2x 21/39W

**6313**-4 ft. T5, 2x 28/54W

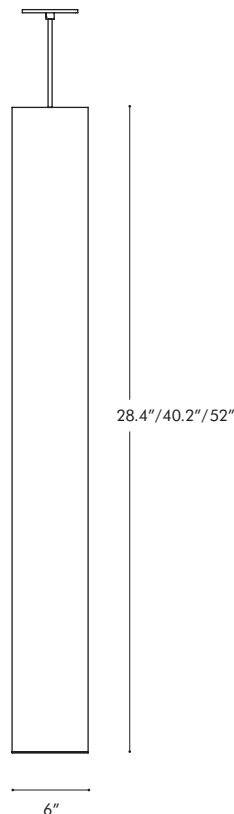

BURBANK,  
CALIFORNIA,  
91505  
WWW.  
DELRAY  
LIGHTING.  
COM


MAR 2012

## T5

6311  
6312  
6313



## CP DISTRIBUTION

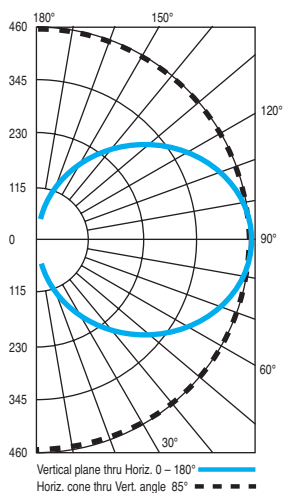

## COEFFICIENTS


% CEILING 80 (20% FLOOR)			
% WALL	70	50	30
0	80	80	80
1	68	63	59
2	61	53	47
3	54	45	38
4	49	39	32
5	45	34	27
6	41	30	23
7	37	27	20
8	35	24	18
9	32	22	16
10	30	20	14

## NOTES

**6313**  
2-28W T5 HO  
T5 miniature bi-pin socket  
Total lumens: 4378 mean  
Total luminaire efficiency: 75%


## LED MR16

**B6MR16**—6" downlight. 9W max.




## CP DISTRIBUTION

### SPOT

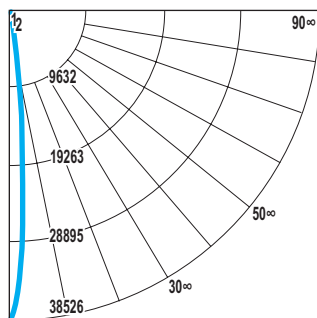

### FLOOD



## ACRYLIC DIFFUSER CLEANING

**Warning:** Do not clean with ammonia based cleaners (e.g. Windex®). Use only water or cleaners specifically formulated for cleaning plastics.

## OPTIONS

### DIMMING


- T5—14, 21, 24, 28 39, 54W
- **SD3**—Advance Mark X, 54W only
- **SD5**—Advance Mark VII
- **SD8**—Lutron Hi Lume FDB
- **SD9**—Lutron Eco System

## MOUNTING OPTIONS

### PIPE MOUNT

Order **BLA** mount for 3/8" IPS pipe. Length must be specified. Includes ball aligner canopy rated for 75 lbs. and mounts to standard J-boxes (below, left). Not for windy locations.

Pipe longer than 8 ft. will be shipped in two pieces—one 8 ft. section plus a second section for the balance—supplied with a painted, threaded pipe coupler, with set screws (below, right).



## MULTI-TUBE CONFIGURATIONS

Standard and custom solid acrylic collars may be added for decoration and earthquake code compliance. Consult factory for details.

