

PENDANT AND WALL MOUNT LUMINAIRES

DELRAY
LIGHTING
INCORPORATED

P1 & P2



TYPE:

PROJECT:

NOTES:

DESCRIPTION:

P1

ORDER#

P113 13W quad

P118 18W triple

P142 26, 32 or
42W triple

P1150 150W
incandescent

SPECIFY FINISH:

B—Black

G—Green

S—Galvanized

P—White

CC—Custom RAL
Color. Specify:

BALLAST

1E—120V electronic

2E—277V electronic

OPTIONS


WM1—Wall Mount

WM2—Wall Mount

CM1—Ceiling Mount

WG1—Wire Guard

PWB—Surface Mount
J-Box

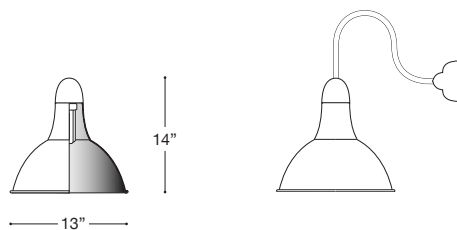

P2

ORDER#

P213 13W quad

P218 18W triple

P242 26, 32 or
42W triple

P2150 150W
incandescent

SPECIFY FINISH:

B—Black

G—Green

S—Galvanized

P—White

CC—Custom RAL
Color. Specify:

BALLAST

1E—120V electronic

2E—277V electronic

OPTIONS


WM1—Wall Mount

WM2—Wall Mount

CM1—Ceiling Mount

WG1—Wire Guard

PWB—Surface Mount
J-Box

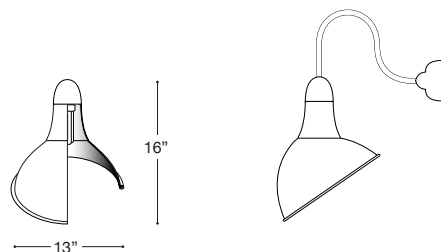

SPECIFICATION INFORMATION

PENDANT MOUNT

- Galvanized canopy mounts to octagonal box, with ballast attached for easy servicing.
- Powder coat finish (must specify).
- Supplied with 6' pendant (**P1** only).
- U.L. rated for damp locations.

SURFACE MOUNT

- Galvanized bracket mounts to octagonal box, with ballast attached for easy servicing.

- Covered by spun steel canopy, with powder coat finish (must specify).
- Specify **WM1**, **WM2** for wall mount. (See back page.)
- Order **CM1** for ceiling mount.
- U.L. rated for wet locations.

BALLAST

- Electronic ballasts are class P, HPF.
- Supplied standard in 120V and 277V.

- Ballasts use 4 pin lamps and provide rapid start.
- .99 power factor with THD<10%.
- End of lamp life protection.

OPTIONS


- **CM1**—Ceiling Mount (specify length)
- **WG1**—Wire Guard
- **WM1**—Wall Mount
- **WM2**—Wall Mount
- **PWB**—Surface Mount J-box

BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM

JULY 2008

32 WATT PLT

P1



32 WATT PLT

P2



BALLAST INFO

- Standard in universal voltage 120V through 277V.
- Thermally protected rapid start electronic ballasts use 4-pin lamps
- .99 power factor with THD<10%.
- End of lamp life protection.

CONE OF LIGHT

MTG. HT.	FC/0°	DIA.
4'	64	2.6
6'	28	3.9
8'	16	5.2
10'	10	6.5
12'	7	7.8


50% FC at edge

FC ON WALL

MTG. HT.	FOOTCANDLES		
	n	Units 2' apart	n
2'	36	39	36
4'	25	26	25
6'	13	14	13
8'	10	10	10
10'	9	9	9


Units 2 feet from wall and 2 feet apart
Based on 1-32 watt lamp

CP DISTRIBUTION




WALL MOUNT DIMENSIONS

WM1

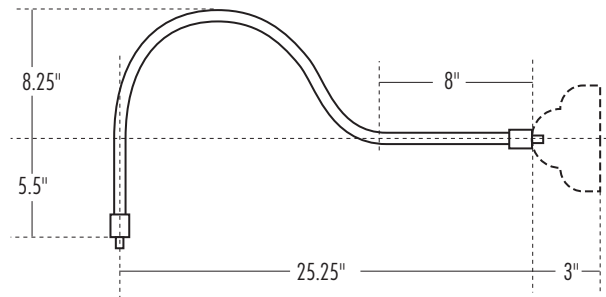


WM2

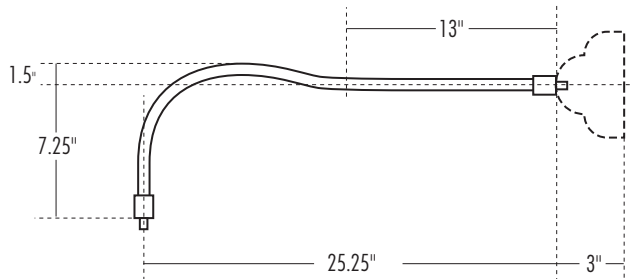


PIPE MOUNT OPTIONS

PWB—Surface mount 4.6" cast square J-box replaces standard canopy and allows 1/2" conduit from two sides (not available with dimming ballasts).



CM1—Pipe mount. Length must be specified.



% CEILING 80 (20% FLOOR)

% WALL 70	50	30
0	66	66
1	62	59
2	59	55
3	57	50
4	53	46
5	50	43
6	48	39
7	45	36
8	42	33
9	39	30
10	35	25