

PENDANT AND WALL MOUNT LUMINAIRES

DELRAY
LIGHTING
INCORPORATED

P3 & P4



TYPE:

DESCRIPTION:

P3

ORDER#

P313 13W quad

P318 18W triple

P342 26, 32 or 42W triple

P3150 150W incandescent

PROJECT:

SPECIFY FINISH:

B—Black

G—Green

S—Galvanized

P—White

CC—Custom RAL Color. Specify:

NOTES:

BALLAST

1E—120V electronic

2E—277V electronic

OPTIONS



WM1—Wall Mount

WM2—Wall Mount

CM1—Ceiling Mount

WG1—Wire Guard

PWB—Surface Mount J-Box



P4

ORDER#

P413 13W quad

P418 18W triple

P442 26, 32 or 42W triple

P4150 150W incandescent

SPECIFY FINISH:

B—Black

G—Green

S—Galvanized

P—White

CC—Custom RAL Color. Specify:

BALLAST

1E—120V electronic

2E—277V electronic

OPTIONS



WM1—Wall Mount

WM2—Wall Mount

CM1—Ceiling Mount

WG1—Wire Guard

PWB—Surface Mount J-Box



SPECIFICATION INFORMATION

PENDANT MOUNT

- Galvanized canopy mounts to octagonal box, with ballast attached for easy servicing.
- Powder coat finish (must specify).
- Supplied with 6' pendant.
- U.L. rated for damp locations.

SURFACE MOUNT

- Galvanized bracket mounts to octagonal box, with ballast attached for easy servicing.

- Covered by spun steel canopy, with powder coat finish (must specify).
- Specify **WM1**, **WM2** for wall mount.
- Order **CM1** for ceiling mount.
- U.L. rated for wet locations.

BALLAST

- Electronic ballasts are class P, HPF.
- Supplied standard in 120V and 277V.
- Ballasts use 4 pin lamps and provide rapid start.

- .99 power factor with THD<10%.
- End of lamp life protection.

OPTIONS


- **CM1**—Ceiling Mount (specify length)
- **WG1**—Wire Guard
- **WM1**—Wall Mount
- **WM2**—Wall Mount
- **PWB**—Surface Mount J-box

**BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM**

JULY 2008

32 WATT PLT

P4



BALLAST INFO


- Standard in universal voltage 120V through 277V.
- Thermally protected rapid start electronic ballasts use 4-pin lamps
- .99 power factor with THD<10%.
- End of lamp life protection.

CONE OF LIGHT

MTG. HT.	FC/0°	DIA.
4'	31	5.8
6'	14	8.7
8'	8	11.6
10'	5	14.5
12'	3	17.4

50% FC at edge

CP DISTRIBUTION




CU

% CEILING 80 (20% FLOOR)


% WALL	70	50	30
0	66	66	66
1	62	61	59
2	59	57	55
3	57	53	50
4	53	49	46
5	50	46	43
6	48	43	39
7	45	39	36
8	42	36	33
9	39	33	30
10	35	29	25

WALL MOUNT DIMENSIONS

WM1

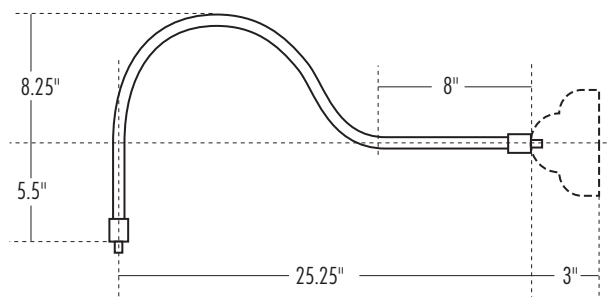


WM2

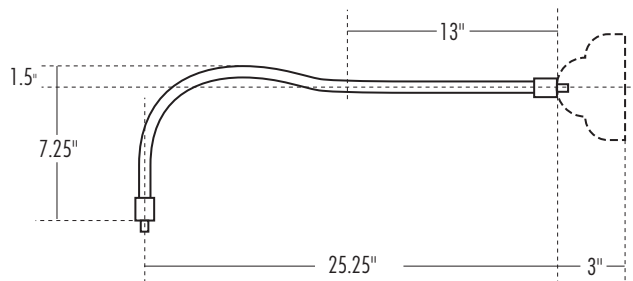

PIPE MOUNT OPTIONS

PWB—Surface mount 4.6" cast square J-box replaces standard canopy and allows 1/2" conduit from two sides (not available with dimming ballasts).



CM1—Pipe mount. Length must be specified.

