

ASPECT GLASS WITH SHADE

DELRAY
LIGHTING
INCORPORATED

226 & 227



TYPE:

PROJECT:

ORDER NUMBER:

Model#	Paint Finish	Glass Color	Wattage	Voltage	Ballast
	H ammertone	I ndigo	18, 26, 32,	1 –120V	E –Electronic
	S ilver	M arine	42 or 150	2 –277V	D3, D4, D5, D8,
	W hite	O pal			D9 –Dimming
	CC –Custom	T angerine			only for items
	RAL color				marked ♦.
					(See back page
					for details.)

Example:

2272	W	M	32	1	E
------	---	---	----	---	---

ARMATURE


Suspends from cable or rod, is constructed of extruded aluminum, and is securely fastened to cast wire way top. Ballast fits inside extruded cylinder attached to lamp holder for pull-down access. U.L. listed for damp locations.

2260

Incandescent

2270

Fluorescent



SURFACE MOUNT


Steel canopy mounts to all recessed J-boxes. Ballast fits inside extruded cylinder **2271** or horizontally in flat canopy **2275**. Specify **EM** for emergency battery pack, available on **2271** only. The 650 lumen battery pack adds 9 3/4" to canopy height, 13 3/4" with the 1300 lumen unit. U.L. listed for damp locations.

2261

Incandescent

2271

Fluorescent




2265

Incandescent

2275♦

Fluorescent



PENDANT MOUNT


Canopies mount to standard J-box. Ballast fits inside extruded cylinder **2272** or horizontally in flat canopy **2277**. Pendant is 6' standard or can be specified in any length with 12' max for CFL. Specify **EM** for emergency battery pack, available on **2272** only. The 650 lumen battery pack adds 9 3/4" to canopy height, 13 3/4" with the 1300 lumen unit. U.L. listed for damp locations.

2262

Incandescent

2272

Fluorescent




2267

Incandescent

2277♦

Fluorescent



WALL MOUNT


4" square by 3/16" thick aluminum wall plate mounts to 3" mudring on 2 3/4" vertical, centered holes. Fixture connects to extruded aluminum arm, which is securely fastened to cast wire way top. Ballast fits inside extruded cylinder **2273**. U.L. listed for damp locations.

2263

Incandescent

2273

Fluorescent




BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM


OCT 2010

FLUORESCENT

1-32W PLT




CP DISTRIBUTION




INCANDESCENT

1-150W A21



CP DISTRIBUTION



COEFFICIENTS OF UTILIZATION

% CEILING 80 (20% FLOOR)

% WALL 70	50	30
0	98	98
1	86	81
2	78	70
3	71	62
4	65	54
5	59	48
6	55	43
7	51	39
8	47	35
9	43	32
10	40	28

NOTES

227232

1-32W triple tube
G24q-3 electronic socket
Total lumens: 2400
Spacing criteria: 1.6

% CEILING 80 (20% FLOOR)

% WALL 70	50	30
0	99	99
1	88	83
2	80	72
3	73	63
4	66	56
5	61	50
6	56	45
7	52	40
8	48	36
9	45	33
10	41	29

NOTES

2262150

1-150W A19
Medium base socket
Total lumens: 2850
Spacing criteria: 1.4


BALLAST INFO

DIMMING

- Dimming only available for items marked **◆** on page 1.
- Voltage *must* be specified.
- Controls lumen output down to $\pm 5\%$.
- Compatible dimmers required for all ballasts.
- **D3** Advance Mark X for 18, 26, 32 or 42W lamp.
- **D4** Lutron Tu-Wire for 26 or 32W lamp. 120V *only*.
- **D5** Advance Mark VII for 18, 26, 32 or 42W lamp.
- **D8** Lutron Hi-Lume 1% for 26 or 32W lamp. Controls lumen output down to $\pm 1\%$.
- **D9** Lutron EcoSystem for 18, 26, 32 or 42W lamp. Controls lumen output down to $\pm 5\%$.

EMERGENCY


- Voltage *must* be specified.
- **EM** emergency power provides 650 lumens for one lamp for 90 minutes. Ht.=15.25"
- **EM13** emergency power provides 1300 lumens for one lamp for 90 minutes. Ht.=18.75"

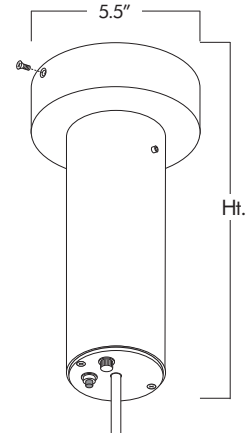

WALL MOUNTING

WALL PREPARATION

- For models 2263 and 2273.
- Mount holes must be aligned vertical center, as shown:



2279 ARM EXTENSION

- Specify arm length, up to 36" maximum.
Example: **2279X** (X=length)
- Aircraft cable, grip locks and mounting hardware included.

