

# ASPECT GLASS LUMINAIRE

**DELRAY  
LIGHTING  
INCORPORATED**

2333 & 2334



**TYPE:**

**PROJECT:**

**ORDER NUMBER:**

Model#	Paint Finish	Glass Color	Wattage	Voltage	Ballast
	<b>H</b> ammertone	<b>I</b> ndigo	<b>18, 26, 32,</b>	<b>1</b> -120V	<b>E</b> -Electronic
	<b>S</b> ilver	<b>M</b> arine	<b>42 or 150</b>	<b>2</b> -277V	<b>D3, D4, D5, D8,</b>
	<b>W</b> hite	<b>O</b> pal			<b>D9</b> -Dimming
	<b>CC</b> -Custom	<b>T</b> angerine			only for items
	RAL color				marked <b>◆</b> .
					(See back page
					for details.)

**Example:**


2342	W	M	32	1	E
------	---	---	----	---	---

## ARMATURE

Suspends from cable or rod, is constructed of extruded aluminum, and is securely fastened to cast wire way top. Ballast fits inside extruded cylinder attached to lamp holder for pulldown access. U.L. listed for damp locations.

**2330**

Incandescent



17.5"

**2340**

Fluorescent

— 7" —

## SURFACE MOUNT

Steel canopy mounts to all recessed J-boxes. Ballast fits inside extruded cylinder **2341** or horizontally in flat canopy **2345**. Specify **EM** for emergency battery pack, available on **2341** only. The 650 lumen battery pack adds 9 3/4" to canopy height, 13 3/4" with the 1300 lumen unit. U.L. listed for damp locations.

**2331**

Incandescent



16.5"

**2341**

Fluorescent

— 7" —

**2335**

Incandescent



11"

**2345◆**

Fluorescent


— 7" —

## PENDANT MOUNT

Canopies mount to standard J-boxes. Ballast fits inside extruded cylinder **2342** or horizontally in flat canopy **2347**. Pendant is 6' standard or can be specified in any length with 12' max for CFL. Specify **EM** for emergency battery pack, available on **2342** only. The 650 lumen battery pack adds 9 3/4" to canopy height, 13 3/4" with the 1300 lumen unit. U.L. listed for damp locations.

**2332**

Incandescent



6.5"

**2342**

Fluorescent

13.5"

— 7" —

**2337**

Incandescent



1 2.25"

**2347◆**

Fluorescent

13.5"


— 7" —

## WALL MOUNT

4" square by 3/16" thick aluminum wall plate mounts to 3" mudring on 2 3/4" vertical, centered holes. Fixture connects to extruded aluminum arm, which is securely fastened to cast wire way top. Ballast fits inside extruded cylinder **2343** or horizontally in flat canopy **2344**. U.L. listed for damp locations.

**2333**

Incandescent



4"

**2343**

Fluorescent


18.5"

— 7" —

— 12.5" —

**2334**

Incandescent



5.5"

**2344◆**

Fluorescent

14.5"

— 7" —


— 12.5" —

BURBANK,  
CALIFORNIA,  
91505  
WWW.  
DELRAY  
LIGHTING.  
COM

OCT 2010

## FLUORESCENT

### 1-32W PLT





## INCANDESCENT

### 1-150W A21



## CP DISTRIBUTION



## COEFFICIENTS OF UTILIZATION

### % CEILING 80 (20% FLOOR)

% WALL	70	50	30
0	96	96	96
1	85	80	76
2	77	69	63
3	70	61	54
4	64	54	46
5	59	48	40
6	54	43	35
7	50	38	31
8	46	34	27
9	43	31	24
10	39	28	21

### % CEILING 80 (20% FLOOR)

% WALL	70	50	30
0	99	99	99
1	88	82	78
2	79	72	65
3	72	63	56
4	66	56	48
5	61	49	42
6	56	44	37
7	52	40	32
8	48	36	29
9	44	33	26
10	41	29	22

## NOTES

### 234232

1-32W triple tube  
G24q-3 electronic socket  
Total lumens: 2400  
Spacing criteria: 1.7

### 2332150

1-150W A19  
Medium base socket  
Total lumens: 2850  
Spacing criteria: 1.5


## BALLAST INFO

### DIMMING

- Dimming only available for items marked **◆** on page 1.
- Voltage *must* be specified.
- Controls lumen output down to  $\pm 5\%$ .
- Compatible dimmers required for all ballasts.
- **D3** Advance Mark X for 18, 26, 32 or 42W lamp.
- **D4** Lutron Tu-Wire for 26 or 32W lamp. 120V *only*.
- **D5** Advance Mark VII for 18, 26, 32 or 42W lamp.
- **D8** Lutron Hi-Lume 1% for 26 or 32W lamp. Controls lumen output down to  $\pm 1\%$ .
- **D9** Lutron EcoSystem for 18, 26, 32 or 42W lamp. Controls lumen output down to  $\pm 5\%$ .

### EMERGENCY


- Voltage *must* be specified.
- **EM** emergency power provides 650 lumens for one lamp for 90 minutes. Ht.=15.25"
- **EM13** emergency power provides 1300 lumens for one lamp for 90 minutes. Ht.=18.75"

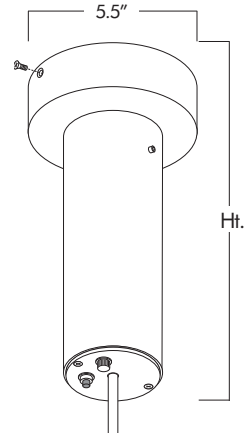

## WALL MOUNTING

### WALL PREPARATION

- For models 2333 and 2343.
- Mount holes must be aligned vertical center, as shown:



### 2349 ARM EXTENSION

- Specify arm length, up to 36" maximum.  
Example: **2349X** (X=length)
- Aircraft cable, grip locks and mounting hardware included.

