

ASPECT GLASS LUMINAIRE

**DELRAY
LIGHTING
INCORPORATED**

237 & 238



TYPE:

PROJECT:

ORDER NUMBER:

Model#	Paint Finish	Glass Color	Wattage	Voltage	Ballast
	H ammertone	I ndigo	18, 26, 32,	1 -120V	E -Electronic
	S ilver	M arine	42 or 150	2 -277V	D3, D4, D5, D8,
	W hite	O pal			D9 -Dimming
	CC -Custom	T angerine			only for items
	RAL color				marked ◆ .
					(See back page
					for details.)

Example:


2382	W	M	32	1	E
------	---	---	----	---	---

ARMATURE

Suspends from cable or rod and is constructed of extruded aluminum, securely fastened to cast wire way top. Ballast fits inside extruded cylinder attached to lamp holder for pulldown access. U.L. listed for damp locations.


2370

Incandescent



2380

Fluorescent



17.5"


11.5"

SURFACE MOUNT

Steel canopy mounts to all recessed J-boxes. Ballast fits inside extruded cylinder **2381** or horizontally in flat canopy **2385**. Specify **EM** for emergency battery pack, available on **2381** only. The 650 lumen battery pack adds 9 3/4" to canopy height; 13 3/4" with the 1300 lumen unit. U.L. listed for damp locations.


2371

Incandescent



2381

Fluorescent




16.5"

11.5"

2375

Incandescent



2385◆

Fluorescent



11"


11.5"

PENDANT MOUNT

Canopies mount to standard J-box. Ballast fits inside extruded cylinder **2382** or horizontally in flat canopy **2387**. Pendant is 6' standard or can be specified in any length with 12' max for CFL. Specify **EM** for emergency battery pack, available on **2382** only. The 650 lumen battery pack adds 9 3/4" to canopy height, 13 3/4" with the 1300 lumen unit. U.L. listed for damp locations.

2372


Incandescent



6.5"

2382

Fluorescent




13.5"

11.5"

2377


Incandescent



1.6"

2387◆

Fluorescent



13.5"


11.5"

WALL MOUNT

4" square by 3/16" thick aluminum wall plate mounts to 3" mud ring on 2 3/4" vertical, centered holes. Fixture connects to extruded aluminum arm, which is securely fastened to cast wire way top. Ballast fits inside extruded cylinder **2383** or in flat canopy **2384**. U.L. listed for damp locations.

2373

Incandescent



4"

2383

Fluorescent




18.5"

11.5"

18"

2374

Incandescent




1.6"

5.5"

2384◆

Fluorescent



14.5"


11.5"

18"

**BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM**


FLUORESCENT

1-32W PLT





INCANDESCENT

1-150W A21



CP DISTRIBUTION



COEFFICIENTS OF UTILIZATION

% CEILING 80 (20% FLOOR)

	% WALL 70	50	30
0	82	82	82
1	76	73	70
2	70	65	61
3	66	59	55
4	61	54	49
5	57	49	44
6	53	45	39
7	49	41	36
8	46	37	32
9	43	34	29
10	39	31	25

% CEILING 80 (20% FLOOR)

	% WALL 70	50	30
0	84	84	84
1	78	76	73
2	74	69	66
3	69	64	59
4	65	58	53
5	61	54	49
6	57	50	45
7	53	46	41
8	50	42	37
9	47	39	34
10	43	34	29

NOTES

238232

1-32W triple tube
G24q-3 electronic socket
Total lumens: 2400
Spacing criteria: 1.2

2372150

1-150W A19
Medium base socket
Total lumens: 2850
Spacing criteria: 1.2

OPTIONS

AL-Acrylic Lens. For security and food service installations. Use with CFL lamps *only*.


BALLAST INFO

DIMMING

- Dimming only available for items marked **◆** on page 1.
- Voltage *must* be specified.
- Controls lumen output down to $\pm 5\%$.
- Compatible dimmers required for all ballasts.
- **D3** Advance Mark X for 18, 26, 32 or 42W lamp.
- **D4** Lutron Tu-Wire for 26 or 32W lamp. 120V *only*.
- **D5** Advance Mark VII for 18, 26, 32 or 42W lamp.
- **D8** Lutron Hi-Lume 1% for 26 or 32W lamp. Controls lumen output down to $\pm 1\%$.
- **D9** Lutron EcoSystem for 18, 26, 32 or 42W lamp. Controls lumen output down to $\pm 5\%$.

EMERGENCY


- Voltage *must* be specified.
- **EM** emergency power provides 650 lumens for one lamp for 90 minutes. Ht.=15.25"
- **EM13** emergency power provides 1300 lumens for one lamp for 90 minutes. Ht.=18.75"

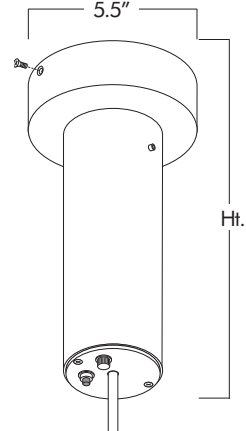

WALL MOUNTING

WALL PREPARATION

- For models 2373 and 2383.
- Mount holes must be aligned vertical center, as shown:



2389 ARM EXTENSION

- Specify arm length, up to 36" maximum.
Example: **2389X** (X=length)
- Aircraft cable, grip locks and mounting hardware included.

