



## PROJECT INFORMATION

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_


TYPE \_\_\_\_\_

**BeveLED 2.1 Recessed Downlight** - BeveLED 2.1 is the most complete recessed LED downlight product family available from USAI Lighting, now with more BeveLED trim finishes, LED classic white color temperatures, innovative housing styles, and dimming driver options than before. With industry-leading performance, BeveLED 2.1 can provide a solution for any project - commercial, corporate and residential installations.

## 1" REGRESS DOWNLIGHT



1" Regress

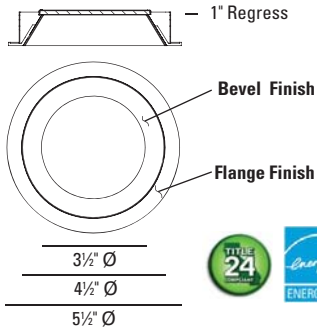

## DELIVERED PERFORMANCE

BeveLED 2.1 1" REGRESS DOWNLIGHT	9 Watts		12 Watts		16 Watts		24 Watts		33 Watts		36 Watts	
	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI
Color Rendering Index	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI
Lumens per Watt	93	68	86	67	86	67	80	63	71	57	100	78
Source Lumens	1150	900	1300	1025	1725	1350	2400	1875	3025	2350	4150	3250
Delivered Lumens	775	600	1025	800	1375	1075	1925	1500	2400	1875	3450	2700
Color Consistency	2-Step MacAdam Ellipse											

Performance based on 3000K

CCT MULTIPLIER	2200K	2700K		3000K		3500K	4000K
Color Rendering Index	80+ CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	80+ CRI
Multiplier for Lumen Output	0.72	0.94	0.78	1.00	.78	1.00	1.06


90+ CRI is not available for 2200K, 3500K, or 4000K



## DEEP REGRESS DOWNLIGHT



Deep Regress

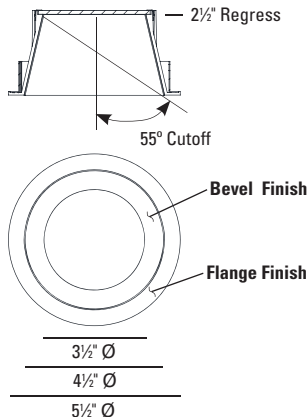

## DELIVERED PERFORMANCE

BeveLED 2.1 DEEP REGRESS DOWNLIGHT	9 Watts		12 Watts		16 Watts		24 Watts		33 Watts		36 Watts	
	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI
Color Rendering Index	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI
Lumens per Watt	70	54	69	54	68	53	64	50	58	45	85	66
Source Lumens	1150	900	1300	1025	1725	1350	2400	1875	3025	2350	4150	3250
Delivered Lumens	625	475	825	650	1100	850	1550	1200	1925	1500	2950	2300
Color Consistency	2-Step MacAdam Ellipse											

Performance based on 3000K

CCT MULTIPLIER	2200K	2700K		3000K		3500K	4000K
Color Rendering Index	80+ CRI	80+ CRI	90+ HIGH CRI	80+ CRI	90+ HIGH CRI	80+ CRI	80+ CRI
Multiplier for Lumen Output	0.72	0.94	0.78	1.00	.78	1.00	1.06

90+ CRI is not available for 2200K, 3500K, or 4000K



## ORDERING INFORMATION



1" REGRESS

DEEP REGRESS

## HOW TO SPECIFY

Ordering Example: Specify trim code and housing code to order: **3021W - B1 - S - 10 - LRTD4 - 9012 - C3 - 27KS - 50 - NC - 277V - DIML2 - CB27**

## TRIM ORDERING INFORMATION

TRIM	OPTION	BEVEL STYLE	LENS	FLANGE FINISH
3021				
<b>1" REGRESS DOWNLIGHT</b>				
3021 Round Downlight 1" Regress	<b>W</b>	Wet location <sup>1</sup>	<b>S</b> Solite (provided standard)  <b>F</b> Frosted	<b>01</b> Clear Matte (AC Bevel only) <b>02</b> Black Anodized (AB Bevel Only) <b>10</b> White <b>13</b> Statuary Bronze <b>21</b> Black <b>28</b> Metalized Grey <b>RAL</b> Custom Color (specify RAL #)
	<b>EML</b>	Integral Emergency Test Switch <sup>2</sup>		
	<b>TZ</b>	6" TechZone ceiling compatible (NCSM only) N/A with 01 or 02 flange finishes.	<b>AB1</b> 1" Regress Bevel, Black Anodized	
			<b>AC1</b> 1" Regress Bevel, Clear Matte Anodized	
<b>DEEP REGRESS DOWNLIGHT</b>				
3021 Round Downlight Deep Regress	<b>W</b>	Wet location <sup>1</sup>	<b>B2</b> 2-1/2" Regress Bevel, Painted Die Cast Matches Flange Finish	
	<b>EML</b>	Integral Emergency Test Switch <sup>2</sup>		
			<b>AC2</b> 2-1/2" Regress Bevel, Clear Matte Anodized	





## HOUSING ORDERING INFORMATION


HOUSING CODE	WATTAGE	ENGINE CODE	COLOR	REFLECTOR	HOUSING TYPE	SELECT ONE VOLTAGE	DIMMING DRIVER OPTIONS	ACCESSORIES
LRTD4								
LRTD4	9009 9W LED	C3	22KS 2200K, 80+ CRI <sup>3</sup>	<b>1" REGRESS DOWNLIGHT</b>		120V	<b>For use with 120V or 277V</b>	<b>1" REGRESS DOWNLIGHT</b> <b>CB27</b> 27" C-Channel Bars <b>CB52</b> 52" C-Channel Bars <b>EML</b> Emergency battery <sup>9</sup> <b>EMLW</b> Emergency battery, wet location <sup>9</sup> <b>TZ</b> 6" TechZone ceiling compatible <sup>10</sup>
	9012 12W LED		27KS 2700K, 80+ CRI	25 25° beam	<b>FT</b> Flat Housing New Construction			
	9016 16W LED		30KS 3000K, 80+ CRI	50 50° beam	<b>FTIC</b> Flat Housing IC-Rated/Airtight (up to 16W maximum)	<b>DIML4</b> Lutron A 3-wire/ECO, 1%		
	9024 24W LED		35KS 3500K, 80+ CRI	90 90° beam	<b>FTCP</b> Flat Housing Chicago Plenum	<b>DIML4E</b> Lutron 5 ECO, 5% <sup>5</sup>		
	9033 33W LED		40KS 4000K, 80+ CRI		<b>FTCP</b> Flat Housing Chicago Plenum	<b>DIML4H</b> Lutron H ECO, 1% Fade <sup>5</sup>		
	9036 36W LED		27KH 2700K, 90+ CRI		<b>NCSM</b> New Construction Narrow Width	<b>DIML6A</b> EdoLED 0-10V, 0.1%, logarithmic / Lutron controls		
			E1	30KH 3000K, 90+ CRI	<b>NC</b> New Construction, all in one	<b>DIML6B</b> EdoLED 0-10V Linear, 0.1%, linear controls	<b>DEEP REGRESS DOWNLIGHT</b> <b>CB27</b> 27" C-Channel Bars <b>CB52</b> 52" C-Channel Bars <b>EML</b> Emergency battery <sup>9</sup> <b>EMLW</b> Emergency battery, wet location <sup>9</sup>	
					<b>CP</b> Chicago Plenum	<b>DIML6E</b> EdoLED 0-10V, 1%, logarithmic/Lutron controls		
						<b>IC</b> Insulation-Contact Rated / Airtight <sup>4</sup>	<b>DIML6F</b> EdoLED 0-10V, 1%, linear controls	
							<b>DIML7</b> EdoLED DALI, 0.1%	
							<b>DIML8</b> EdoLED DMX, 0.1% <sup>6,7</sup>	
							<b>For use with 120V only</b>	
						120V	<b>DIML3</b> Lutron A 2-wire, 1% 120V only	
							<b>DIML19</b> Phase 2-wire dimming, 1% 120V only <sup>5,6,8</sup>	
							<b>For use with 347V only</b>	
						347V	<b>DIML15</b> 0-10V dim, 1% 347V only	

TRIM INFORMATION

1" REGRESS DOWNLIGHT TRIMS

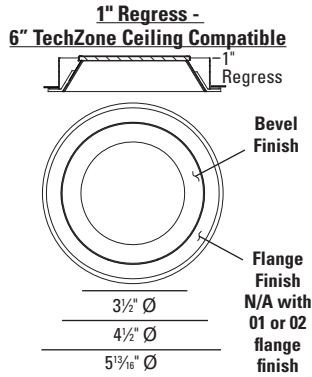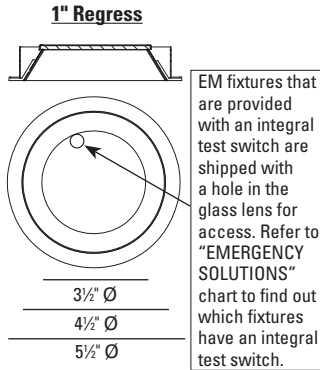

DEEP REGRESS DOWNLIGHT TRIM

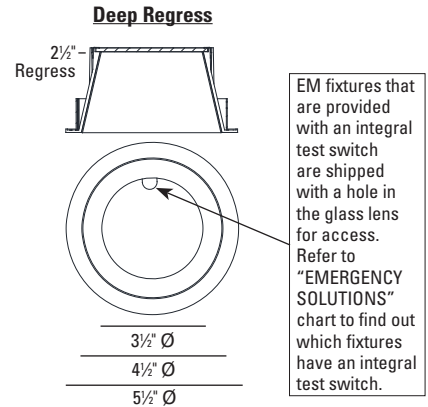

3021 - 1" Regress Emergency Solutions

Housing	EM SERVICE	Integral Test Switch	Remote Test Switch	Inverter By Others
FT, FTIC, FTCP	N/A			X
NCSM*	Above ceiling access required		X	X
NC, 25° or 50° optic	Through aperture	X		X
NC, 90° optic	Through aperture		X	X
NC Wet Location	Through aperture		X	X
CP	N/A			X
IC	N/A			X

3021 - Deep Regress Emergency Solutions


Housing	EM SERVICE	Integral Test Switch	Remote Test Switch	Inverter By Others
NC, C25 or C40 optic	Through aperture	X		X
NC, C70 optic	Through aperture		X	X
NC Wet Location	Through aperture		X	X
CP	N/A			X
IC	N/A			X

\* 347V cannot be offered with EM


\* NCSM + DIML8 cannot be offered with EM, 347V cannot be offered with EM

HOUSING INFORMATION

NC, IC AND CP HOUSINGS BELOW ARE FOR USE WITH 1" REGRESS TRIMS & DEEP REGRESS TRIMS

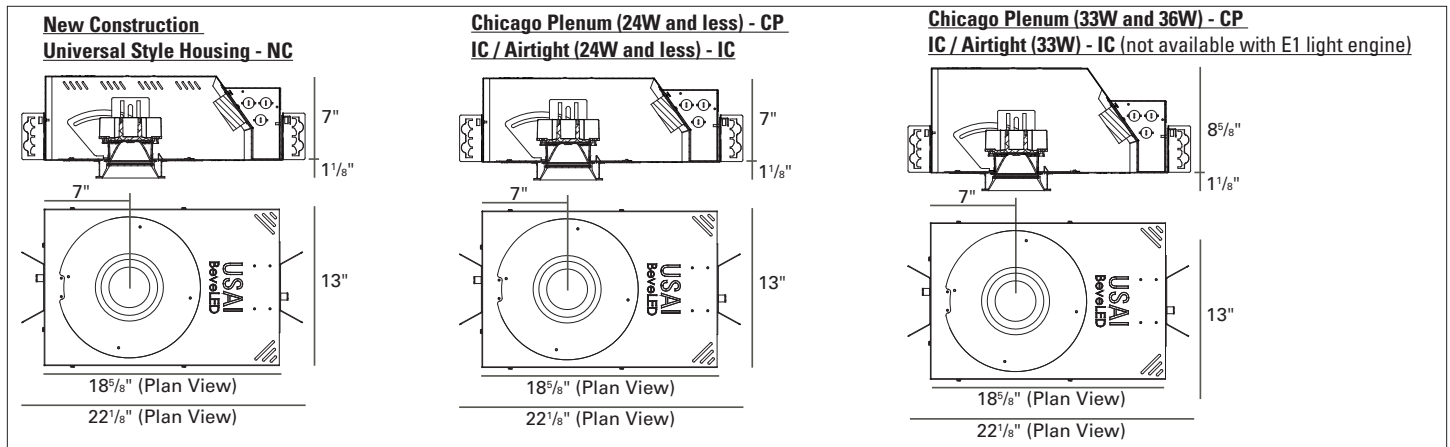

HOUSINGS BELOW ARE FOR USE WITH 1" REGRESS TRIMS ONLY (FT, FTIC, FTCP AND NCSM ARE NOT AVAILABLE FOR USE WITH DEEP REGRESS)

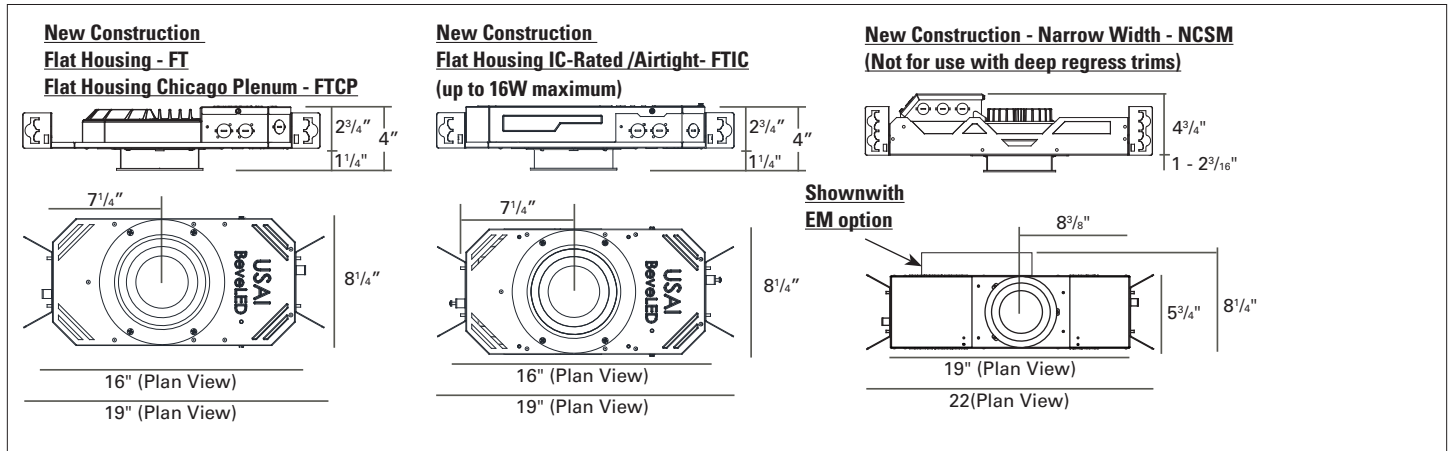



## SPECIFICATIONS

**TRIM:** 4-1/2" round aperture with a 1" regress or deep regress bevel and 1/2" flange, retained by two mounting clips. Die cast aluminum bevel is available in white, statuary bronze, black, and metalized gray painted finishes, with flange painted to match. Also available in black or clear matte anodized finishes, with self-finish or contrasting painted flange. Custom colors are available (provide RAL#). Trim is shipped with a solite lens provided standard.

Some examples of standard trim finish options for 3021 are shown below:



**FIELD REPLACEABLE LED LIGHT ENGINE:** is serviceable through the aperture without tools. All USAI Lighting Classic White light engines feature industry leading color consistency within a 2-Step MacAdam's ellipse. 2200K is not available with E1 light engine.

**FIELD REPLACEABLE DIMMING DRIVER:** 0-10V, 100%-10% solid state electronic constant current DIML2 dimming driver with a high power factor provided standard and sources 2mA. Specify 120V or 277V. Driver complies with IEEE62.41 surge protection. Multiple dimming driver options are available; some on-time delay may be experienced, depending on control system used.

**EMERGENCY:** Fixtures provided with an integral test switch are provided with a hole in the glass lens as per drawing. Fixtures provided with a remote test switch are provided with a 24" lead length for location of the test switch. Fixtures that have no USAI EM option may be connected to an inverter (by others) for emergency lighting. **SPECIAL NOTE FOR NCSM HOUSING:** DIML8 cannot be combined with EM options in NCSM housing. See emergency solutions chart for more information on EM test switches and servicing.

**HOUSING:** 1" regress fixture housing options are NC, IC, CP, FT, FTIC, FTCP and NCSM. DEEP regress fixture housing options are NC, IC, and CP only. FT and NCSM housings are not available with DEEP regress trims. Fabricated of 20 ga. galvanized steel with thru wire J-box, 4 in 4 out at min. 90°C, #12 AWG thru branch circuit wiring. FTIC housing is IC-rated up to 16W maximum. IC-rated housings for use with 9W, 12W, and 16W light engines only are rated for direct contact with spray foam insulation of R-42 or less. IC rated housing is not available with E1 light engine. NCSM with TZ option is compatible with 6" TechZone ceiling systems. When using DIML8, NCSM housing can NOT be used with thru-branch circuit wiring.

**MOUNTING:** Butterfly brackets and adjustable nailer bars with integral nails provided. Nailer bars are extendible from 14" to 24" centers. C-channel bars are optionally available for acoustical ceiling applications.

**MAXIMUM CEILING THICKNESS:** As noted on housing drawings.

**CEILING CUT OUT:** 5-1/16" Ø

**WARRANTY:** Based on IESNA LM80-2008, BeveLED 2.1 has a 50,000 hour rated life at 70% lumen maintenance (L70). USAI Lighting Warranty covers replacement parts for 5 years from date of shipment.

**LISTINGS:** Dry/Damp. Wet location option available with B1 trim only. NRTL/CSA-US tested to UL standards. IBEW union made. Energy Star Qualified under Luminaires Specification V2.0. Please see Energy Star website for exact model #s included in the listing. Please note that the following options are not Energy Star qualified: 22KS, 27KH, and 30KH light engines; E1 light engines; B-13, B-21, and AB trim styles; Frosted lens and EM options. CEC/Title 24 Compliant up to 16W maximum. See CEC website for exact models included.

### NOTES:

- Not for use in corrosive environment.
- Use of pressure washer voids warranty.



**PHOTOMETRICS:** Consult factory or website for IES files. Tested in accordance with IESNA LM79.

## DELIVERED PERFORMANCE

### 3021 / 3321 16W 30KS 25° 1" Regress

#### Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80				70				50				30				10				0			
RW %:	70	50	30	0	70	50	30	0	50	30	20	0	50	30	20	0	50	30	20	0	50	30	20	0
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.11	1.06	1.06	1.06	1.06	1.02	1.02	1.02	1.02	1.00	1.00	1.00	1.00
1	1.14	1.11	1.09	1.07	1.11	1.09	1.07	.94	1.05	1.03	1.02	1.01	1.01	1.00	.99	.98	.98	.97	.96	.94	.94	.94	.94	.94
2	1.09	1.04	1.00	.97	1.06	1.02	.99	.89	.99	.96	.94	.96	.94	.92	.92	.93	.92	.90	.88	.88	.88	.88	.88	.88
3	1.04	.98	.93	.89	1.02	.96	.92	.84	.94	.90	.87	.91	.88	.86	.86	.89	.87	.85	.85	.83	.83	.83	.83	.83
4	.99	.92	.87	.83	.97	.91	.86	.79	.89	.85	.82	.87	.83	.81	.81	.85	.82	.80	.80	.78	.78	.78	.78	.78
5	.95	.87	.82	.78	.93	.86	.81	.75	.84	.80	.77	.83	.79	.76	.76	.81	.78	.75	.75	.74	.74	.74	.74	.74
6	.91	.83	.77	.73	.89	.82	.77	.71	.80	.76	.72	.79	.75	.72	.72	.78	.74	.71	.71	.70	.70	.70	.70	.70
7	.87	.79	.73	.69	.86	.78	.73	.68	.77	.72	.69	.76	.71	.68	.68	.74	.71	.68	.68	.67	.67	.67	.67	.67
8	.83	.75	.69	.66	.82	.74	.69	.65	.73	.69	.65	.72	.68	.65	.65	.71	.68	.65	.65	.64	.64	.64	.64	.64
9	.80	.72	.66	.63	.79	.71	.66	.62	.70	.66	.62	.69	.65	.62	.62	.69	.65	.62	.62	.61	.61	.61	.61	.61
10	.77	.69	.63	.60	.76	.68	.63	.59	.67	.63	.60	.67	.62	.59	.59	.66	.62	.59	.59	.58	.58	.58	.58	.58


#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1,033.0	74.8%
0-40	1,268.7	91.9%
0-60	1,353.3	98%
60-90	28.0	2%
70-100	9.3	0.7%
90-120	0	0%

#### Illuminance at a Distance

	Center Beam Fc	Beam Width
2.0R	1,106.1 fc	0.8 ft
4.0R	276.5 fc	1.5 ft
6.0R	122.9 fc	2.3 ft
8.0R	69.1 fc	3.1 ft
10.0R	44.2 fc	3.9 ft
12.0R	30.7 fc	4.6 ft
14.0R	22.6 fc	5.4 ft
16.0R	17.3 fc	6.2 ft

■ Beam Spread: 21.9°

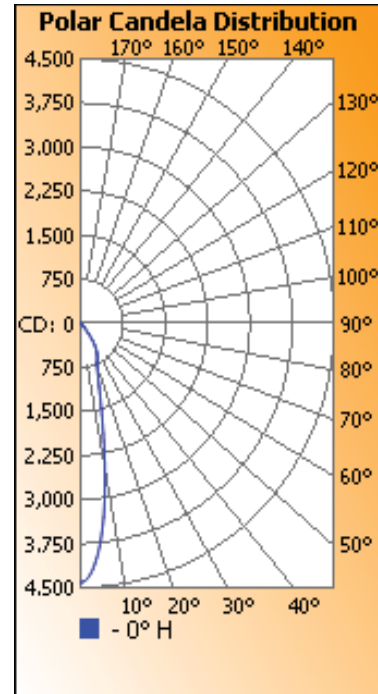

### 3021 / 3321 33W 30KS 25° 1" Regress

#### Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80				70				50				30				10				0			
RW %:	70	50	30	0	70	50	30	0	50	30	20	0	50	30	20	0	50	30	20	0	50	30	20	0
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.11	1.06	1.06	1.06	1.06	1.02	1.02	1.02	1.02	1.00	1.00	1.00	1.00
1	1.14	1.11	1.09	1.07	1.11	1.09	1.07	.94	1.05	1.03	1.02	1.01	1.01	1.00	.99	.98	.98	.97	.96	.94	.94	.94	.94	.94
2	1.09	1.04	1.00	.97	1.06	1.02	.99	.89	.99	.96	.94	.96	.94	.92	.92	.93	.92	.90	.88	.88	.88	.88	.88	.88
3	1.04	.98	.93	.89	1.02	.96	.92	.84	.94	.90	.87	.91	.88	.86	.86	.89	.87	.85	.85	.83	.83	.83	.83	.83
4	.99	.92	.87	.83	.97	.91	.86	.79	.89	.85	.82	.87	.83	.81	.81	.85	.82	.80	.80	.78	.78	.78	.78	.78
5	.95	.87	.82	.78	.93	.86	.81	.75	.84	.80	.77	.83	.79	.76	.76	.81	.78	.75	.75	.74	.74	.74	.74	.74
6	.91	.83	.77	.73	.89	.82	.77	.71	.80	.76	.72	.79	.75	.72	.72	.78	.74	.71	.71	.70	.70	.70	.70	.70
7	.87	.79	.73	.69	.86	.78	.73	.68	.77	.72	.69	.76	.71	.68	.68	.74	.71	.68	.68	.67	.67	.67	.67	.67
8	.83	.75	.69	.66	.82	.74	.69	.65	.73	.69	.65	.72	.68	.65	.65	.71	.68	.65	.65	.64	.64	.64	.64	.64
9	.80	.72	.66	.63	.79	.71	.66	.62	.70	.66	.62	.69	.65	.62	.62	.69	.65	.62	.62	.61	.61	.61	.61	.61
10	.77	.69	.63	.60	.76	.68	.63	.59	.67	.63	.60	.67	.62	.59	.59	.66	.62	.59	.59	.58	.58	.58	.58	.58


#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1,799.7	74.8%
0-40	2,210.3	91.9%
0-60	2,357.6	98%
60-90	48.7	2%
70-100	16.1	0.7%
90-120	0	0%

#### Illuminance at a Distance

	Center Beam Fc	Beam Width
2.0R	1,927.0 fc	0.8 ft
4.0R	481.8 fc	1.5 ft
6.0R	214.1 fc	2.3 ft
8.0R	120.4 fc	3.1 ft
10.0R	77.1 fc	3.9 ft
12.0R	53.5 fc	4.6 ft
14.0R	39.3 fc	5.4 ft
16.0R	30.1 fc	6.2 ft

■ Beam Spread: 21.9°

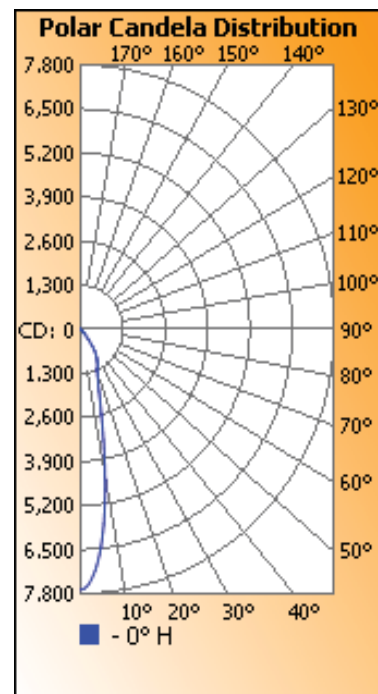

## DELIVERED PERFORMANCE

### 3021 / 3321 16W 30KS 50° 1" Regress



#### Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80				70				50				30				10				0			
RW %:	70	50	30	0	70	50	30	0	50	30	20	0	50	30	20	0	50	30	20	0	50	30	20	0
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.11	1.06	1.06	1.06	1.06	1.02	1.02	1.02	1.02	1.00	1.00	1.00	1.00
1	1.14	1.11	1.08	1.06	1.11	1.09	1.06	.94	1.05	1.03	1.01	1.01	1.01	.99	.98	.97	.97	.96	.95	.94	.94	.94	.94	.94
2	1.08	1.03	.99	.96	1.06	1.01	.98	.88	.98	.95	.93	.93	.93	.93	.91	.93	.91	.89	.89	.87	.87	.87	.87	.87
3	1.03	.96	.92	.88	1.01	.95	.91	.82	.92	.89	.86	.86	.86	.84	.84	.88	.85	.83	.83	.81	.81	.81	.81	.81
4	.98	.91	.85	.81	.96	.89	.84	.77	.87	.83	.80	.80	.85	.82	.79	.83	.80	.78	.78	.76	.76	.76	.76	.76
5	.93	.85	.79	.75	.92	.84	.79	.73	.82	.78	.74	.74	.81	.77	.74	.79	.76	.73	.73	.72	.72	.72	.72	.72
6	.89	.80	.75	.70	.87	.80	.74	.69	.78	.73	.70	.70	.77	.72	.69	.75	.72	.69	.69	.67	.67	.67	.67	.67
7	.85	.76	.70	.66	.84	.75	.70	.65	.74	.69	.66	.66	.73	.69	.65	.72	.68	.65	.65	.64	.64	.64	.64	.64
8	.81	.72	.66	.62	.80	.71	.66	.61	.70	.65	.62	.62	.69	.65	.62	.68	.64	.61	.61	.60	.60	.60	.60	.60
9	.78	.68	.63	.59	.77	.68	.63	.58	.67	.62	.59	.59	.66	.62	.58	.65	.61	.58	.58	.57	.57	.57	.57	.57
10	.74	.65	.60	.56	.73	.65	.59	.55	.64	.59	.56	.56	.63	.59	.55	.62	.58	.55	.55	.54	.54	.54	.54	.54

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1,003.8	74.9%
0-40	1,227.7	91.6%
0-60	1,309.5	97.7%
60-90	30.3	2.3%
70-100	9.8	0.7%
90-120	0	0%

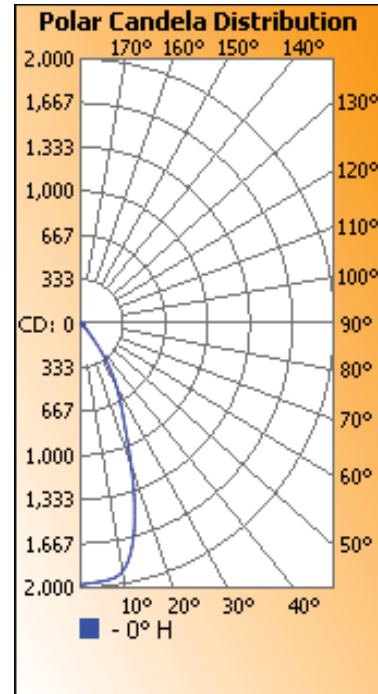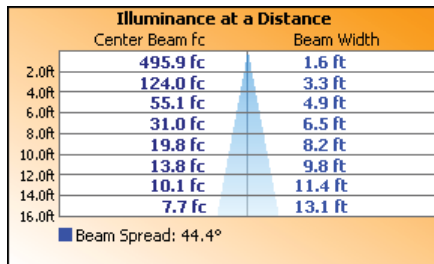

### 3021 / 3321 33W 30KS 50° 1" Regress



#### Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80				70				50				30				10				0			
RW %:	70	50	30	0	70	50	30	0	50	30	20	0	50	30	20	0	50	30	20	0	50	30	20	0
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.11	1.06	1.06	1.06	1.06	1.02	1.02	1.02	1.02	1.00	1.00	1.00	1.00
1	1.14	1.11	1.08	1.06	1.11	1.09	1.06	.94	1.05	1.03	1.01	1.01	1.01	.99	.98	.97	.97	.96	.95	.94	.94	.94	.94	.94
2	1.08	1.03	.99	.96	1.06	1.01	.98	.88	.98	.95	.93	.93	.93	.93	.91	.93	.91	.89	.89	.87	.87	.87	.87	.87
3	1.03	.96	.92	.88	1.01	.95	.91	.82	.92	.89	.86	.86	.86	.84	.84	.88	.85	.83	.83	.81	.81	.81	.81	.81
4	.98	.91	.85	.81	.96	.89	.84	.77	.87	.83	.80	.80	.85	.82	.79	.83	.80	.78	.78	.76	.76	.76	.76	.76
5	.93	.85	.79	.75	.92	.84	.79	.73	.82	.78	.74	.74	.81	.77	.74	.79	.76	.73	.73	.72	.72	.72	.72	.72
6	.89	.80	.75	.70	.87	.80	.74	.69	.78	.73	.70	.70	.77	.72	.69	.75	.72	.69	.69	.67	.67	.67	.67	.67
7	.85	.76	.70	.66	.84	.75	.70	.65	.74	.69	.66	.66	.73	.69	.65	.72	.68	.65	.65	.64	.64	.64	.64	.64
8	.81	.72	.66	.62	.80	.71	.66	.61	.70	.65	.62	.62	.69	.65	.62	.68	.64	.61	.61	.60	.60	.60	.60	.60
9	.78	.68	.63	.59	.77	.68	.63	.58	.67	.62	.59	.59	.66	.62	.58	.65	.61	.58	.58	.57	.57	.57	.57	.57
10	.74	.65	.60	.56	.73	.65	.59	.55	.64	.59	.56	.56	.63	.59	.55	.62	.58	.55	.55	.54	.54	.54	.54	.54

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1,748.8	74.9%
0-40	2,138.9	91.6%
0-60	2,281.3	97.7%
60-90	52.9	2.3%
70-100	17.1	0.7%
90-120	0	0%

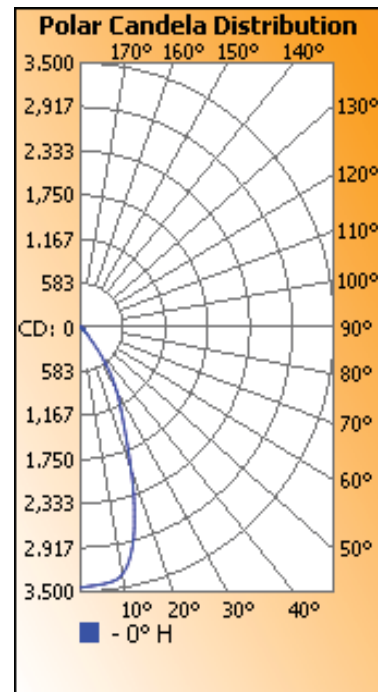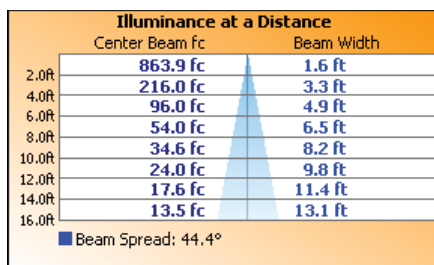


## DELIVERED PERFORMANCE

### 3021 / 3321 16W 30KS 90° 1" Regress

**Coefficients Of Utilization - Zonal Cavity Method**


Effective Floor Cavity Reflectance: 20%

RCC %:	80				70				50				30				10				0			
RW %:	70	50	30	0	70	50	30	0	50	30	20	0	50	30	20	0	50	30	20	0	50	30	20	0
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.11	1.06	1.06	1.06	1.06	1.02	1.02	1.02	1.02	1.00	1.00	1.00	1.00
1	1.11	1.08	1.04	1.01	1.09	1.05	1.02	.90	1.01	.99	.97	.97	.97	.96	.94	.94	.94	.92	.91	.89	.89	.88	.85	.82
2	1.03	.97	.91	.87	1.01	.95	.90	.79	.92	.87	.84	.88	.85	.82	.86	.83	.80	.78	.71	.69	.78	.74	.71	.69
3	.96	.87	.80	.75	.94	.86	.79	.70	.83	.78	.73	.80	.76	.72	.78	.74	.71	.67	.63	.61	.69	.65	.63	.61
4	.89	.79	.71	.66	.87	.78	.71	.63	.75	.69	.65	.73	.68	.64	.71	.67	.63	.61	.56	.54	.61	.57	.56	.54
5	.83	.72	.64	.58	.81	.71	.63	.56	.69	.62	.57	.67	.61	.57	.65	.60	.56	.54	.50	.49	.54	.50	.49	.47
6	.77	.65	.57	.52	.75	.64	.57	.50	.63	.56	.51	.61	.55	.51	.60	.54	.50	.49	.44	.44	.49	.44	.44	.42
7	.72	.60	.52	.47	.70	.59	.52	.45	.58	.51	.46	.56	.50	.46	.55	.50	.46	.44	.40	.39	.44	.40	.39	.36
8	.67	.55	.47	.42	.66	.54	.47	.41	.53	.46	.42	.52	.46	.42	.51	.45	.41	.39	.36	.35	.40	.36	.35	.33
9	.63	.51	.43	.38	.62	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36	.33	.32	.36	.33	.32	.30
10	.59	.47	.40	.35	.58	.47	.40	.34	.46	.39	.35	.45	.39	.35	.44	.38	.35	.33	.30	.29	.33	.30	.29	.27

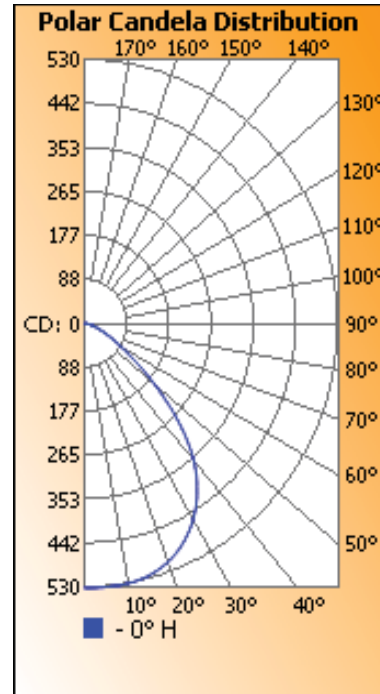

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	420.6	39.2%
0-40	675.0	62.9%
0-60	998.8	93.1%
60-90	73.5	6.9%
70-100	23.0	2.1%
90-120	0	0%

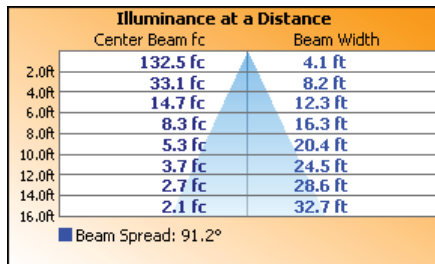


### 3021 / 3321 33W 30KS 90° 1" Regress

**Coefficients Of Utilization - Zonal Cavity Method**


Effective Floor Cavity Reflectance: 20%

RCC %:	80				70				50				30				10				0			
RW %:	70	50	30	0	70	50	30	0	50	30	20	0	50	30	20	0	50	30	20	0	50	30	20	0
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.11	1.06	1.06	1.06	1.06	1.02	1.02	1.02	1.02	1.00	1.00	1.00	1.00
1	1.11	1.08	1.04	1.01	1.09	1.05	1.02	.90	1.01	.99	.97	.97	.97	.96	.94	.94	.94	.92	.91	.89	.89	.88	.85	.82
2	1.03	.97	.91	.87	1.01	.95	.90	.79	.92	.87	.84	.88	.85	.82	.86	.83	.80	.78	.71	.69	.78	.74	.71	.69
3	.96	.87	.80	.75	.94	.86	.79	.70	.83	.78	.73	.80	.76	.72	.78	.74	.71	.67	.63	.61	.69	.65	.63	.61
4	.89	.79	.71	.66	.87	.78	.71	.63	.75	.69	.65	.73	.68	.64	.71	.67	.63	.61	.56	.54	.61	.57	.56	.54
5	.83	.72	.64	.58	.81	.71	.63	.56	.69	.62	.57	.67	.61	.57	.65	.60	.56	.54	.50	.49	.54	.50	.49	.47
6	.77	.65	.57	.52	.75	.64	.57	.50	.63	.56	.51	.61	.55	.51	.60	.54	.50	.49	.44	.44	.49	.44	.44	.42
7	.72	.60	.52	.47	.70	.59	.52	.45	.58	.51	.46	.56	.50	.46	.55	.50	.46	.44	.40	.39	.44	.40	.39	.36
8	.67	.55	.47	.42	.66	.54	.47	.41	.53	.46	.42	.52	.46	.42	.51	.45	.41	.39	.36	.35	.40	.36	.35	.33
9	.63	.51	.43	.38	.62	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36	.33	.32	.36	.33	.32	.30
10	.59	.47	.40	.35	.58	.47	.40	.34	.46	.39	.35	.45	.39	.35	.44	.38	.35	.33	.30	.29	.33	.30	.29	.27

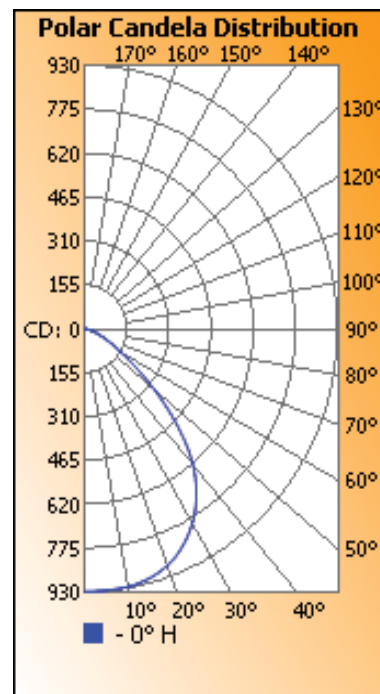

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	732.8	39.2%
0-40	1,175.9	62.9%
0-60	1,740.1	93.1%
60-90	128.0	6.9%
70-100	40.1	2.1%
90-120	0	0%

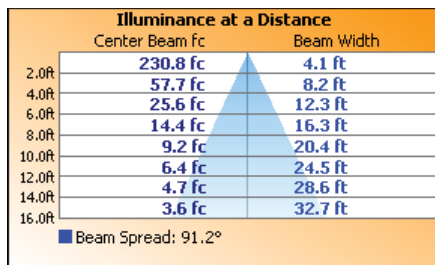

**DIMMING DRIVER WIRING SCHEMES:**

**NOTES:**

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

**IMPORTANT SAFETY INSTRUCTIONS  
- SAVE THESE INSTRUCTIONS**


1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

**D2 / DIML2 LED: 0-10V Dimming Driver Wiring (Dims down to 10%)**

D2 / DIML2 Dimmer Compatibility Chart				
Manufacturer	Product	Part Number	Dimmed Light Output Range	Qty Fixtures Per Dimmer*
<b>120V / 277V</b>				
Crestron	iLux dimmer expansion module	CLS-EXP-DIMFLV	100% - 10%	Use source current per fixture specification sheet to determine number of fixtures per dimmer. Max number of fixtures is limited by dimmer load rating.
Crestron	DIN Rail dimmer	DIN-4DIMFLV4	100% - 10%	
Crestron	DIN Rail analog output module	DIN-A08	100% - 10%	
Crestron	8 Channel dimmer module	GLX-DIMFLV8	100% - 10%	
Crestron	8 Channel dimmer module	GLXP-DIMFLV8	100% - 10%	
Leviton	IlumaTech dimmer	IP710-DLX	100% - 10%	
Lightolier (Philips)	Vega	V2000FAMU	100% - 10%	
Lutron	Diva	DVTV-XX	100% - 10%	

\* NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details.


**D2 / DIML2  
0-10V DIMMING W/RELAY TO SWITCH POWER**

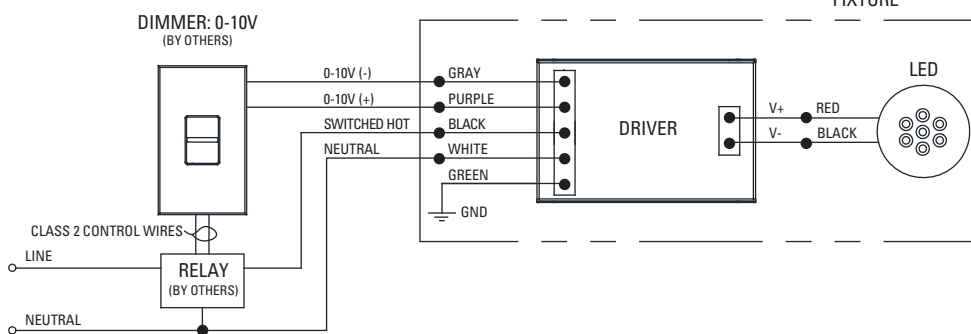

**NOTE:**

If switched, non-dimming operation is desired, cap off purple and gray wires individually at installation. Do NOT cap purple and gray wires together.

**D2 / DIML2  
0-10V DIMMING (NO RELAY)**

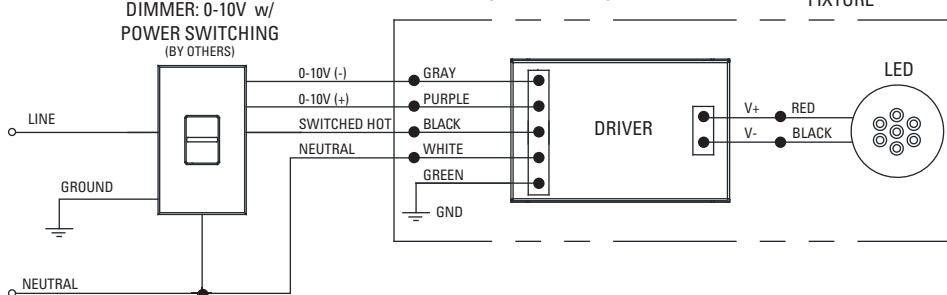

**NOTE:**

If switched, non-dimming operation is desired, cap off purple and gray wires individually at installation. Do NOT cap purple and gray wires together.



**DIMMING DRIVER WIRING SCHEMES:**

**NOTES:**

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

**IMPORTANT SAFETY INSTRUCTIONS  
- SAVE THESE INSTRUCTIONS**


1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

**D3 / DIML3 LED: Lutron Hi-Lume A-Series 2 Wire Fwd Phase (with neutral) / LED Dimming Driver Wiring (Dims down to 1%) 120V**

D3 / DIML3 Dimmer Compatibility Chart					
Manufacturer	Product	Part Number	Dimmed Light Output Range	Qty Fixtures Per Dimmer*	
				Fixture Wattage	
120V Only					
				39W and Less	40W - 80W
ETC	Sensor+ Cabinet	ELV10	100% - 1%	1 - 26	1 - 13
ETC	Unison DRd Cabinet	ELV10	100% - 1%	1 - 26	1 - 13
Lutron	Maestro Wireless® 600W dimmer	MRF2-6ND-120-	100% - 1%	1 - 8	1 - 4
Lutron	Maestro Wireless® 1000W dimmer	MRF2-10ND-120-	100% - 1%	1 - 13	1 - 6
Lutron	HomeWorks® QS adaptive dimmer	HQRD-6NA-	100% - 1%	1 - 8	1 - 4
Lutron	HomeWorks® QS 600W dimmer	HQRD-6ND-	100% - 1%	1 - 8	1 - 4
Lutron	HomeWorks® QS 1000 W dimmer	HQRD-10ND-	100% - 1%	1 - 13	1 - 6
Lutron	Caseta Wireless® Pro 1000W dimmer	PD-10NXD-	100% - 1%	1 - 13	1 - 6
Lutron	Stanza® dimmer	SZ-6ND-	100% - 1%	1 - 8	1 - 4
Lutron	RadioRA® 2 adaptive dimmer	RRD-6NA-	100% - 1%	1 - 8	1 - 4
Lutron	RadioRA® 2 1000 W dimmer	RRD-10ND-	100% - 1%	1 - 6	1 - 3
Lutron	myRoom DIN power module	MQSE-4A1-D	100% - 1%	1 - 6	1 - 3
Lutron	HomeWorks® QS wallbox power module	HQRJ-WPM-6D-120-	100% - 1%	1 - 26	1 - 13
Lutron	Homeworks® DIN power module	LQSE-4A1-D	100% - 1%	1 - 6	1 - 3
Lutron	HomeWorks® wallbox power module	HV1-WPM-6D-120	100% - 1%	1 - 26	1 - 13
Lutron	GRAFIK Eye® QS control unit	QSGR-, QSGRJ-	100% - 1%	1 - 26	1 - 13
Lutron	GRAFIK Eye® 3000 control unit	GRX-3100-, GRX-3500-	100% - 1%	1 - 26	1 - 13
Lutron	RPM-4U module	HW-RPM-4U-120, LP-RPM-4U-120	100% - 1%	1 - 26	1 - 13
Lutron	RPM-4A module	HW-RPM-4A-120, LP-RPM-4A-120	100% - 1%	1 - 26	1 - 13
Lutron	GP dimming panels	Various	100% - 1%	1 - 26	1 - 13
Lutron	Ariadni CL 250W dimmer	AYCL-253P-	100%-1%	1 - 8	1 - 4
Lutron	Diva CL 250W dimmer	DVCL-253P-, DVSCCL-253P-	100%-1%	1 - 8	1 - 4
Lutron	Grafik T CL or RF CL dimmer	GT-250M-, GTJ-250M-	100%-1%	1 - 8	1 - 4
Lutron	Nova T CL 250W dimmer	NTCL-250-	100%-1%	1 - 10	1 - 5

\* NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details.

**D3 / DIML3  
2 WIRE PHASE DIMMING**

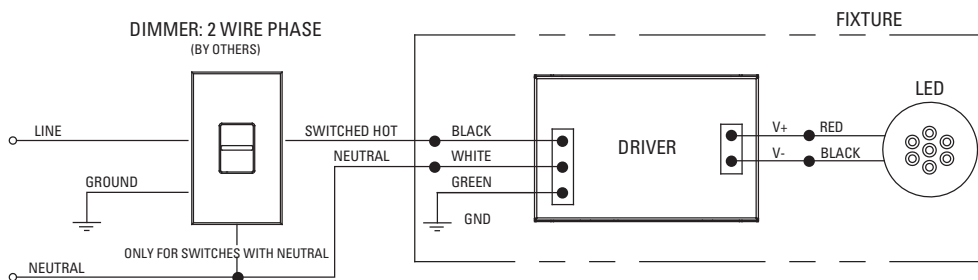

**DIMMING DRIVER WIRING SCHEMES:**

**NOTES:**

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

**IMPORTANT SAFETY INSTRUCTIONS  
- SAVE THESE INSTRUCTIONS**

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

**D4 / DIML4 LED: Lutron Hi-Lume A-Series LED Driver with 3-Wire FL Control / LED Dimming Driver Wiring (Dims down to 1%)**

<b>D4 / DIML4 3-Wire Dimmer Compatibility Chart</b>					
Manufacturer	Product	Part Number	Dimmed Light Output Range	Qty Fixtures Per Control*	
				Fixture Wattage	
<b>120V Only</b>				39W and Less	40W - 80W
ETC	Sensor+ Cabinet	D20 Dimming module	100% - 1%	1-53	1-26
ETC	Unison DRd Cabinet	D20F Dimming module	100% - 1%	1-53	1-26
Lutron	Nova T	NTF-10-	100%-1%	1-41	1-20
Lutron	Nova T	NTF-103P-	100%-1%	1-20	1-10
Lutron	Nova	NF-10-	100%-1%	1-41	1-20
Lutron	Nova	NF-103P-	100%-1%	1-20	1-10
Lutron	Vareo	VF-10-	100%-1%	1-20	1-10
Lutron	Skylark	SF-10P-, SF-103P-	100%-1%	1-20	1-10
Lutron	Diva	DVF-103P-, DVSCF-103P-	100%-1%	1-20	1-10
Lutron	Ariadni	AYF-103P-	100%-1%	1-20	1-10
Lutron	Vierti	VTF-6A-	100%-1%	1-15	1-7
Lutron	Maestro	MAF-6AM-, MSCF-6AM-	100%-1%	1-15	1-7
Lutron	Maestro Wireless	MRF2-F6AN-DV-	100%-1%	1-15	1-7
Lutron	RadioRA 2	RRD-F6AN-DV-	100%-1%	1-15	1-7
Lutron	HomeWorks QS	HQRD-F6AN-DV	100%-1%	1-15	1-7
Lutron	Interfaces	PHPM-3F-120, PHPM-3F-DV	100%-1%	1-41	1-20
Lutron	GP Dimming Panels	Various	100%-1%	1-41	1-20
<b>277V Only</b>				40W and Less	41W - 80W
ETC	Sensor+ Cabinet	D20 Dimming module	100% - 1%	1-53	1-26
ETC	Unison DRd Cabinet	D20F Dimming module	100% - 1%	1-53	1-26
Lutron	Nova T	NTF-10-277-	100%-1%	1-44	1-22
Lutron	Nova T	NTF-103P-277-	100%-1%	1-33	1-16
Lutron	Nova	NF-10-277-	100%-1%	1-44	1-22
Lutron	Nova	NF-103P-277-	100%-1%	1-33	1-16
Lutron	Skylark	SF-12P-277-, SF-12P-277-3	100%-1%	1-33	1-16
Lutron	Diva	DVF-103P-277-, DVSCF-103P-277-	100%-1%	1-33	1-16
Lutron	Ariadni	AYF-103P-277-	100%-1%	1-44	1-22
Lutron	Vierti	VTF-6A-	100%-1%	1-33	1-16
Lutron	Maestro	MAF-6AM-277-, MSCF-6AM-277-	100%-1%	1-20	1-10
Lutron	Maestro Wireless	MRF2-F6AN-DV-	100%-1%	1-33	1-16
Lutron	RadioRA 2	RRD-F6AN-DV-	100%-1%	1-33	1-16
Lutron	HomeWorks QS	HQRD-F6AN-DV	100%-1%	1-33	1-16
Lutron	Interfaces	PHPM-3F-DV	100%-1%	1-88	1-44
Lutron	GP Dimming Panels	Various	100%-1%	1-88	1-44

\* NOTE: Number of fixtures may be higher if wattage is less than maximum values shown. Refer to dimmer manufacturer's documentation for installation instructions and circuit details.

**DIML4 wiring diagrams continued on next page**

**DIMMING DRIVER WIRING SCHEMES:**


**NOTES:**

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

**IMPORTANT SAFETY INSTRUCTIONS  
- SAVE THESE INSTRUCTIONS**

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).


**D4 / DIML4 LED: Lutron Hi-Lume A-Series LED Driver with 3-Wire FL Control / LED Dimming Driver Wiring (Dims down to 1%)**

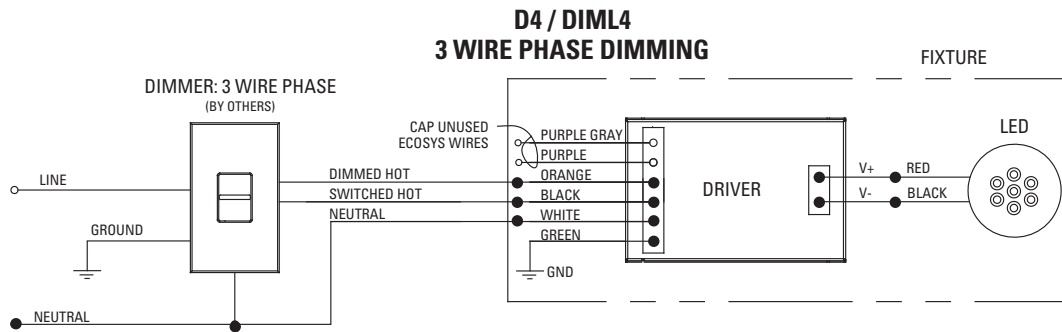

**D4 / DIML4 LED: Lutron Hi-Lume A-Series LED Driver with EcoSystem Control / LED Dimming Driver Wiring (Dims down to**

<b>D4 / DIML4 EcoSystem Dimmer Compatibility Chart</b>					
Manufacturer	Product	Part Number	Dimmed Light Output Range	Qty Fixtures Per Control*	
				Fixture Wattage	
<b>120V / 277V</b>				39W and Less	40W - 80W
Lutron	PowPak dimming module	RMJ-ECO32-DV-B	100%-1%	1-32	1-16
Lutron	Energi Savr Node	QSN-1ECO-S, QSN-2ECO-S	100%-1%	1-64	1-32
Lutron	GRAFIK Eye QS (120V ONLY)	QSGRJ- E, QSGR- E	100%-1%	1-64	1-32
Lutron	Quantum	Various	100%-1%	1-64	1-32

\* NOTE: Number of fixtures may be higher if wattage is less than maximum values shown. Refer to dimmer manufacturer's documentation for installation instructions and circuit details.

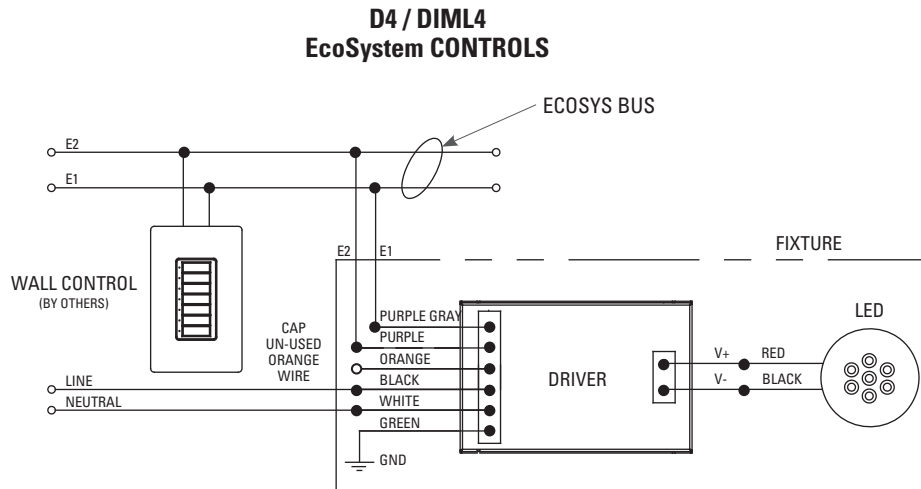

**DIMMING DRIVER WIRING SCHEMES:**

**NOTES:**

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

**IMPORTANT SAFETY INSTRUCTIONS  
- SAVE THESE INSTRUCTIONS**

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

**D4E / DIML4E LED: Lutron 5 Series EcoSystem LED Driver / LED Dimming Driver Wiring (Dims down to 5%)**

D4E / DIML4E EcoSystem Dimmer Compatibility Chart					
Manufacturer	Product	Part Number	Dimmed Light Output Range	Qty Fixtures Per Control*	
				Fixture Wattage	
120V / 277V				39W and Less	40W - 80W
Lutron	PowPak dimming module	RMJ-ECO32-DV-B	100%-5%	1-32	1-16
Lutron	Energi Savr Node	QSN-1ECO-S, QSN-2ECO-S	100%-5%	1-64	1-32
Lutron	GRAFIK Eye QS (120V ONLY)	QSGRJ- E, QSGR- E	100%-5%	1-64	1-32
Lutron	Quantum	Various	100%-5%	1-64	1-32


\* NOTE: Number of fixtures may be higher if wattage is less than maximum values shown. Refer to dimmer manufacturer's documentation for installation instructions and circuit details.

**D4H / DIML4H LED: Lutron H Series EcoSystem LED Driver with Fade to Black (dims down to 1%)**

D4H / DIML4H EcoSystem Dimmer Compatibility Chart					
Manufacturer	Product	Part Number	Dimmed Light Output Range	Qty Fixtures Per Control*	
				Fixture Wattage	
120V / 277V				39W and Less	40W - 80W
Lutron	PowPak dimming module	RMJ-ECO32-DV-B	100%-1%	1-32	1-16
Lutron	Energi Savr Node	QSN-1ECO-S, QSN-2ECO-S	100%-1%	1-64	1-32
Lutron	GRAFIK Eye QS (120V ONLY)	QSGRJ- E, QSGR- E	100%-1%	1-64	1-32
Lutron	Quantum	Various	100%-1%	1-64	1-32

\* NOTE: Number of fixtures may be higher if wattage is less than maximum values shown. Refer to dimmer manufacturer's documentation for installation instructions and circuit details.

**D4E / DIML4E and D4H / DIML 4H  
EcoSystem CONTROLS**

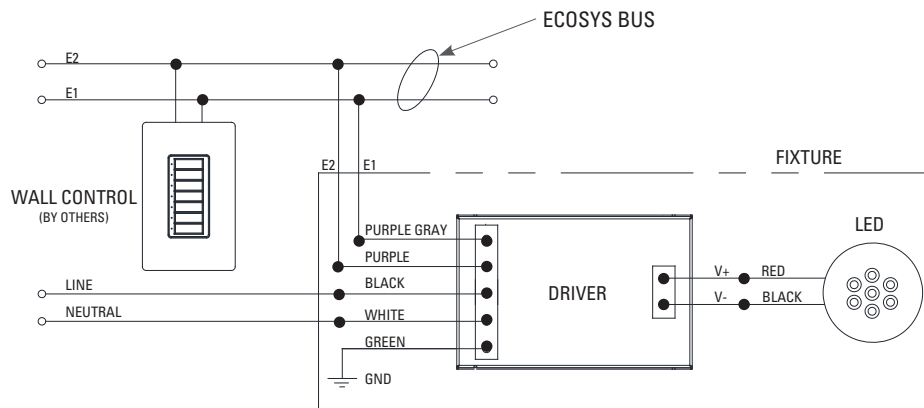

### IMPORTANT SAFETY INSTRUCTIONS - SAVE THESE INSTRUCTIONS

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

### D6A / DIML6A and D6E / DIML6E LED Dimming Compatibility Table

D6A / DIML6A and D6E / DIML6E are linearly programmed dimming drivers for use with logarithmic-style dimming controls (e.g., Lutron and others listed in the table below)  
 D6A / DIML6A = EldoLED SOLOdrive 0-10V control dims from 100% to 0.1%  
 D6E / DIML6E = EldoLED ECOdrive 0-10V control dims from 100% to 1%

D6A / DIML6A and D6E / DIML6E Dimmer Compatibility Chart					
Manufacturer	Product	Part Number	Dimmed Light Output Range		Qty Fixtures Per Dimmer*
			DIML6A	6E	
<b>120V &amp; 277V</b>					
Lutron	Diva	DVTV/NFTV with PP-20	99% - 0.1%	1%	Refer to manufacturer's dimmer load rating for maximum and minimum fixture quantities per dimmer. Enlighted compatible.
Lutron	Nova T	NTFTV with PP-20	99% - 0.1%	1%	
Lutron	Energi Savr Node	QSN-4T16-S	100% - 0.1%	1%	
Lutron	GP Dimming Panels	TVM2 Module	99% - 0.1%	1%	
Lutron	Interfaces	GRX-TV1 w/ GRX3503	100% - 0.1%	1%	
Sensor Switch	nIO	nIO EZ	100% - 0.1%	1%	
enlighted	Control Unit	CU-3E-1R	100% - 0.1%	1%	

\* NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details.


### D6B / DIML6B and D6F / DIML6F LED Dimming Compatibility Table

D6B / DIML6B and D6F / DIML6F are logarithmic-programmed dimming drivers for use with linear-style dimming controls (e.g., Crestron, non-Lutron and others listed below)  
 D6B / DIML6B = EldoLED SOLOdrive 0-10V control dims from 100% to 0.1% D6F / DIML6F = EldoLED ECOdrive 0-10V control dims from 100% to 1%

D6B / DIML6B and D6F / DIML6F Dimmer Compatibility Chart					
Manufacturer	Product	Part Number	Dimmed Light Output Range		Qty Fixtures Per Dimmer*
			DIML6B	6F	
<b>120V &amp; 277V</b>					
Bush-Jaeger	Electronic potentiometer	2112U-101	100% - 0.1%	1%	Refer to manufacturer's dimmer load rating for maximum and minimum fixture quantities per dimmer. Enlighted compatible.
Jung	Electronic potentiometer	240-10	100% - 0.1%	1%	
Leviton	Iluma Tech dimmer	IP710-DLX	100% - 0.1%	1%	
Lightolier (Philips)	Momentum (120V ONLY)	ZP600FAM120	100% - 0.1%	1%	
Merten	Electronic potentiometer	5729	100% - 0.1%	1%	
Pass & Seymour	Titan	CD4FB-W	100% - 0.1%	1%	
Watt Stopper	Miro	DCLV1	100% - 0.1%	1%	
Synergy	Wallbox Dimmers	ISD BC	100% - 0.1%	1%	
ABB	i-bus	SD/S 2.16.1	100% - 0.1%	1%	
Crestron	Modules	GLX-DIMFLV8, GLXP-DIMFLV8	100% - 0.1%	1%	
Crestron	Green Light	GLPAC-DIMFLV4-, GLPAC-DIMFLV8-	100% - 0.1%	1%	
Crestron	Green Light Power Pack	GLPP-DIMFLVEX-PM, GLPP-1DIMFLV2EX-PM, GLPP-1DIMFLV3EX-PM	100% - 0.1%	1%	
Crestron	DIN Rail Analog Output Module	DIN-A08	100% - 0.1%	1%	
Crestron	DIN Rail 0-10V Fluorescent Dimmer	DIN-4DIMFLV4	100% - 0.1%	1%	
Crestron	iLux 0-10V Dimmer Expansion Module	CLS-EXP-DIMFLV	100% - 0.1%	1%	
enlighted	Control Unit	CU-3E-1R	100% - 0.1%	1%	

### DIMMING DRIVER WIRING SCHEMES:

NOTES: Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

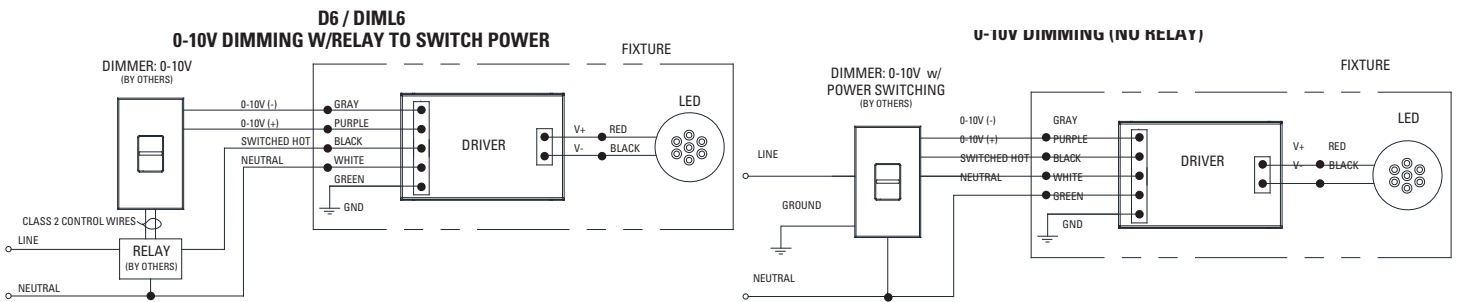

**DIMMING DRIVER WIRING SCHEMES:**

**NOTES:**

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

**IMPORTANT SAFETY INSTRUCTIONS**

**- SAVE THESE INSTRUCTIONS**

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).


**D7 / DIML7 and D7E Dimming Driver Wiring**

D7 / DIML7 and D7E are linearly programmed dimming drivers.

D7 / DIML7 = EldoLED SOLOdrive DALI control dims from 100% to 0.1%

D7E = EldoLED ECOdrive DALI control dims from 100% to 1%

**D7 / DIML7 / D7E  
DALI CONTROLS**

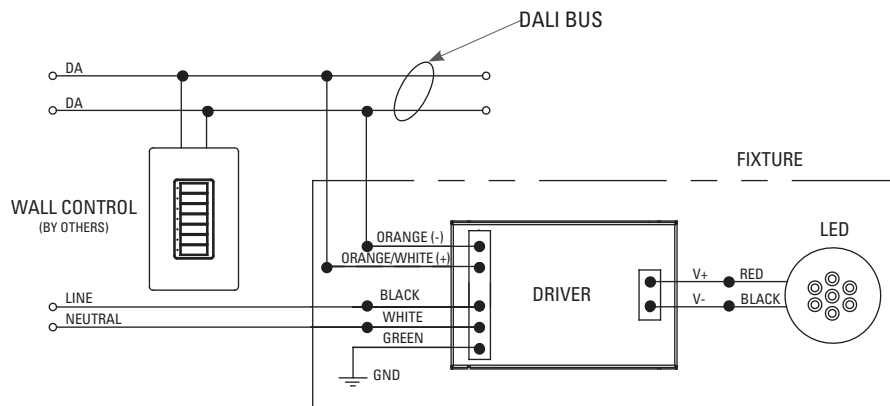

**DIMMING DRIVER WIRING SCHEMES:**

**NOTES:**

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

**IMPORTANT SAFETY INSTRUCTIONS  
- SAVE THESE INSTRUCTIONS**

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

**D8 / DIML8 and D8E Dimming Driver Wiring**

D8 / DIML8 and D8E are linearly programmed dimming drivers.

D8 / DIML8 = EldoLED POWERdrive DMX control dims from 100% to 0.1%

D8E = EldoLED POWERdrive DMX control dims from 100% to 1%


**DMX BUS - XLR CABLE OR  
SHIELDED DATA CABLE**

The data cable used must meet the following requirements:

- type: shielded, 2-conductor twisted pair
- maximum capacitance between conductors: 30 pF/ft
- maximum capacitance between conductor and shield: 55 pF/ft
- maximum resistance: 0.02 ohms/ft
- normal impedance: 100-140 ohms
- conductive core: 24 AWG is recommended

If 3-wire data cables are preferred, we suggest a Belden 9841 or equivalent cable which meets the specifications for EIA RS-485 applications. Do not use standard microphone cables: they cannot transmit DMX512 data reliably over long distances. NOTE: DMX link termination device (by others) should be used on last fixture in line on a circuit to avoid signal loss.

**D8 / DIML8 / D8E  
DMX CONTROLS**

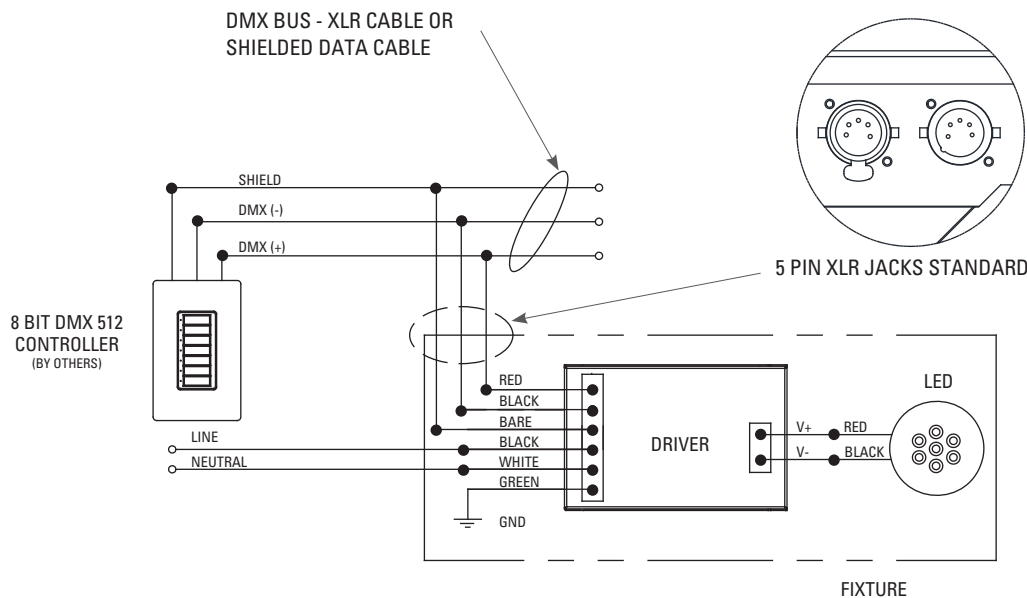

**DIMMING DRIVER WIRING SCHEMES:**

**NOTES:**

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

**IMPORTANT SAFETY INSTRUCTIONS  
- SAVE THESE INSTRUCTIONS**


1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

**D15 / DIML15 LED: 0-10V, 347V Dimming Driver Wiring (Dims down to 1%) 347V Only**

D15 / DIML15 Dimmer Compatibility Chart			
Manufacturer	Product	Dimmed Light Output Range	Qty Fixtures Per Dimmer*
<b>347</b>			Use source current per fixture specification sheet to determine number of fixtures per dimmer. Max number of fixtures is limited by dimmer load rating.
Acuity	Synergy ISD-BC	100% - 1%	
Douglas Lighting	WPN-5721, WPN-5822	100% - 1%	
Hubbell	Light Hawk2 LHD-IRS3-N347-xx	100% - 1%	
Leviton	Illumatech IP710-DLZ with 347V relay	100% - 1%	
Leviton	Centura Fluorescent Control System	100% - 1%	
Lutron	Nova NFTV-* dimmer plus 347V relay	100% - 1%	
Lutron	Diva DDTV-* dimmer plus 347V relay	100% - 1%	

\* NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details.

**D15 / DIML15  
0-10V DIMMING W/RELAY TO SWITCH POWER**

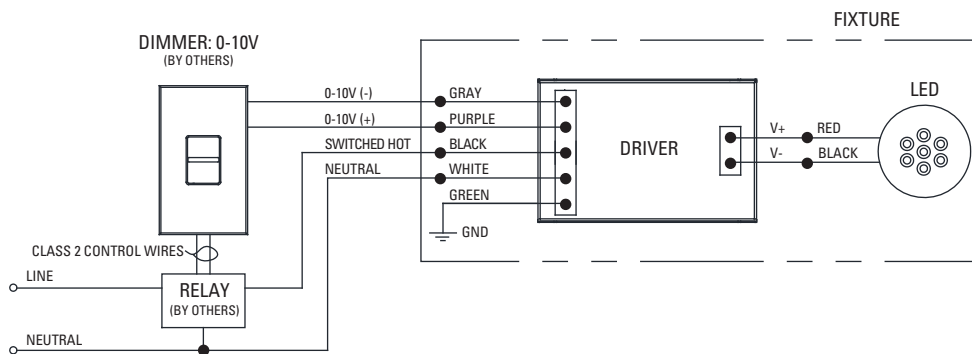

**NOTE:**  
If switched, non-dimming operation is desired, cap off purple and gray wires individually at installation. Do NOT cap purple and gray wires together.



**DIMMING DRIVER WIRING SCHEMES:**


**NOTES:**

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

**IMPORTANT SAFETY INSTRUCTIONS  
- SAVE THESE INSTRUCTIONS**

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

**D19 / DIML19 LED: Hatch XTC series or equivalent - Forward and Reverse Phase Dimming Driver.  
Dims down to 1% contingent upon dimmer specification and load. 120V only.**

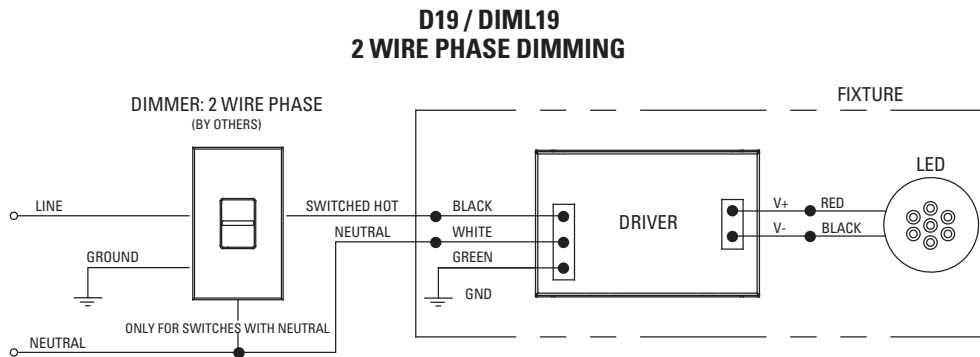

**D19 / DIML19 Dimmer Compatibility Chart**

120V ONLY		
Forward Phase / TRIAC Dimming		
Manufacturer	Product	Qty Fixtures Per Dimmer
Leviton	IPL06-10Z	Use fixture wattage per fixture specification sheet to determine number of fixtures per dimmer. Max number of fixtures is limited by dimmer load rating.
	6613-xxx	
Lutron	S-600P	
	S-603P	
	DV-600P	
	DV-603P	
	DVSC-603P	
	CT-600P	
	CT-603P	

120V ONLY		
Reverse Phase / ELV Dimming		
Manufacturer	Product	Qty Fixtures Per Dimmer
Leviton	6615	Use fixture wattage per fixture specification sheet to determine number of fixtures per dimmer. Max number of fixtures is limited by dimmer load rating.
	IPE04-xxx	
Lutron	NTELV-300	
	NTELV-600	
	SELV-300P	
	SELV-303P	
	DVELV-300P	
	DVELV-303P	