



8" CYLINDER WALL MOUNT DOWNLIGHT

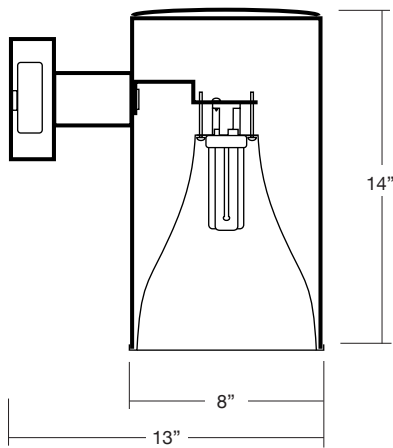


Wall Mount Cylinder



Clear Alzak® Haze



Wheat Alzak® Haze



Black Baffle



Splay with
Fresnel Lens

SPECIFICATION INFORMATION

CYLINDER HOUSING

Constructed of seamless extruded aluminum, with a powder coat finish. 14" standard height; dimming and emergency ballast add 4". Fixture mounts to standard J-box.

REFLECTOR

Reflector is anodized, specular, durable and anti-iridescent; available in 30° cutoff (.30). Finishes are **A**—Clear Alzak® Haze or **G**—Wheat Alzak® Haze

TRIM OPTIONS

B—Black baffle
SP—Splay Fresnel Lens

BALLAST

Electronic enclosed, class P, HPF is supplied standard in 120V or 277V. Ballasts use 4-pin lamps and provide rapid start, .99 power factor with THD<10%.

ELECTRICAL

Ballast mounted in canopy for easy access. U.L. listed for use in damp locations. For wet locations, specify convex lens **WL**.

ACCESSORIES

D3—Advance Mark X dimming ballast (adds 4" to length)
D4—Lutron Tu-Wire dimming ballast (120V *only*)
D9—Lutron Eco System dimming ballast
EM—Emergency power pack ignites one lamp for 90 minutes. (Adds 4" to height.)
WL—Wet location convex lens

FINISHES

BM—Brushed Metal, Anodized
BZ—Bronze
K—Black
W—White
S—Silver
CC—Custom Color (Must specify RAL color number.)

ORDERING INFORMATION

LAMP

1-18 18W triple tube
1-26 26W triple tube
1-32 32W triple tube
1-42 42W triple tube

SPECIFY FINISH:

BM—Brushed Metal, anodized
BZ—Bronze
K—Black

120V ELECTRIC

CW8118.1E 18W triple tube
CW8126.1E 26W triple tube
CW8132.1E 32W triple tube
CW8142.1E 42W triple tube

W—White
S—Silver
CC—Custom Color
Specify RAL color #:

277V ELECTRIC

CW8118.2E 18W triple tube
CW8126.2E 26W triple tube
CW8132.2E 32W triple tube
CW8142.2E 42W triple tube

ACCESSORIES:

EM
D3
D4
D9

SUBMITTAL INFORMATION

TYPE:

DESCRIPTION:

PROJECT:

NOTES:


DELRAY
LIGHTING
INCORPORATED

CW8100

BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM


CLEAR ALZAK 30°

CW8118




CLEAR ALZAK 30°

CW8126




CLEAR ALZAK 30°

CW8132



CLEAR ALZAK 30°

CW8142



CONE OF LIGHT

MTG. HT.	FC/0°	DIA.
4'	65	3.7
6'	29	5.5
8'	17	7.3
10'	11	9.2
12'	8	11.0

50% FC at edge

MTG. HT.	FC/0°	DIA.
4'	81	3.7
6'	39	5.5
8'	19	7.3
10'	12	9.2
12'	9	11.0

50% FC at edge





MTG. HT.	FC/0°	DIA.
4'	95	4.2
6'	42	6.4
8'	24	8.5
10'	15	10.7
12'	11	12.8

50% FC at edge

MTG. HT.	FC/0°	DIA.
4'	123	4.3
6'	54	6.6
8'	31	8.8
10'	19	10.9
12'	14	12.9

50% FC at edge

CP DISTRIBUTION



COEFFICIENTS OF UTILIZATION

% CEILING 80	% (20% FLOOR)		
	% WALL 70	50	30
0	75	75	75
1	72	71	70
2	70	67	65
3	67	64	61
4	64	60	58
5	62	57	54
6	59	55	52
7	57	52	49
8	54	49	46
9	52	47	43
10	50	44	41

% CEILING 80	% (20% FLOOR)		
	% WALL 70	50	30
0	71	71	71
1	69	67	66
2	66	63	61
3	63	60	57
4	61	57	54
5	58	53	50
6	55	51	48
7	53	48	45
8	50	45	42
9	48	43	39
10	46	40	37

% CEILING 80	% (20% FLOOR)		
	% WALL 70	50	30
0	84	84	84
1	80	78	77
2	77	74	71
3	73	69	66
4	70	65	62
5	67	61	57
6	63	58	54
7	60	54	50
8	57	50	46
9	54	47	43
10	51	44	40

% CEILING 80	% (20% FLOOR)		
	% WALL 70	50	30
0	79	79	79
1	76	74	73
2	73	70	67
3	69	66	63
4	66	62	58
5	63	58	55
6	60	55	51
7	57	51	48
8	54	48	44
9	51	45	41
10	49	42	39

NOTES

CW8118

1-18W triple tube
G24q-2 electronic socket
Total lumens: 1250
Spacing criteria: .9
Wheat Alzak x.90

CW8126

1-26W triple tube
G24q-3 electronic socket
Total lumens: 1800
Spacing criteria: .9
Wheat Alzak x.90

CW8132

1-32W triple tube
G24q-3 electronic socket
Total lumens: 2400
Spacing criteria: .9
Wheat Alzak x.90

CW8142

1-42W triple tube
G24q-4 electronic socket
Total lumens: 3200
Spacing criteria: .9
Wheat Alzak x.90