

## KONE OPAL GLASS LUMINAIRE WITH DOWNLIGHT



**TYPE:**

**PROJECT:**

**ORDER NUMBER:**

Model#	Wattage	Voltage	Option
	<b>13, 18, 26</b>	<b>1</b> –120V <b>2</b> –277V	<b>EM</b> –Emergency battery (pendant only). (See Back Page)

**Example:**

6112	18	1	EM
------	----	---	----


### KONE PENDANT

Canopy mounts to standard J-box. Electronic ballast fits inside fixture for easy access. Pendant is 45" standard with push button adjustable aircraft cable.


Finish is white with white power cord. Glass shade is opal for general illumination with clad aluminum downlight relector for task lighting.

18 and 26W fixtures have twist lock socket for secure, easy relamping. Emergency battery backup is available. U.L. listed for damp locations.

**6112**  
Fluorescent

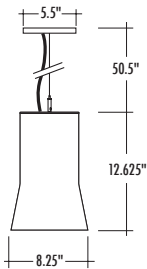

**6112EM**  
Fluorescent

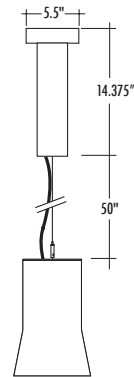

### KONE OPAL SURFACE


Canopy mounts to standard J-box. Electronic ballast fits on backplate for easy access. Glass shade is removable without tools.

Finish is white. Glass shade is opal for general illumination with clad aluminum downlight relector for task lighting.

Fixtures have a twist lock socket for secure, easy relamping. Not available with dimming or emergency battery. U.L. listed for damp locations.

**Note:** 18W maximum.

**6111**  
Fluorescent



**DELRAY**  
**LIGHTING**  
INCORPORATED

**911**

BURBANK,  
CALIFORNIA,  
91505  
WWW.  
DELRAY  
LIGHTING.  
COM


SEPT 2010

## FLUORESCENT


## BALLAST INFO

## OPTIONS

### 1-18W PLT



### CP DISTRIBUTION

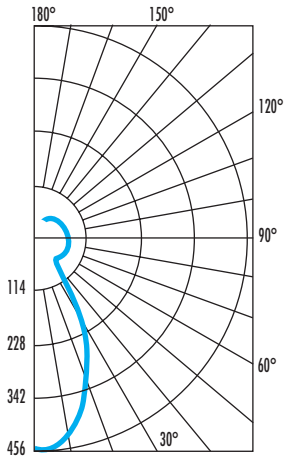

### COEFFICIENTS OF UTILIZATION

#### % CEILING 80 (20% FLOOR)

% WALL	70	50	30
0	77	77	77
1	69	65	61
2	63	57	52
3	57	50	45
4	53	45	39
5	49	41	35
6	45	37	31
7	42	34	28
8	39	31	25
9	37	28	23
10	35	26	21

### NOTES

#### 6112.18

1-18W triple tube  
G24q-2 electronic twist lock socket  
Total lumens: 1200  
Spacing criteria: .82

### EMERGENCY

- Voltage *must* be specified.
- **EM** emergency power provides 650 lumens for one lamp for 90 minutes. Ht.=15.25"
- **EM13** emergency power provides 1300 lumens for one lamp for 90 minutes. Ht.=19"

**AL**-Acrylic Lens. For security and food service installations.  
Use with CFL lamps *only*.

