

KONE II CLEAR W/ ETCHED GLASS LUMINAIRE WITH DOWNLIGHT

**DELRAY
LIGHTING
INCORPORATED**

6222



TYPE:

PROJECT:

ORDER NUMBER:

Model#	Wattage	Voltage	Option
	26, 32, 42 or 57 CFL	1 -120V 2 -277V	EM -Emergency battery
	70 or 100 Metal Halide		Dimming: D3, D4, D5, D8 or D9 (See Back Page)


Example:

6222	26	1	EM
------	----	---	----


KONE CLEAR PENDANT

Canopy mounts to standard J-box. Compact fluorescent electronic ballast fits inside fixture for easy access, metal halide ballast is in canopy. Pendant is 6' standard with push button adjustable aircraft cable. Canopy finish is black with steel braided power cord. Clear glass upper /opal glass lower shade for general illumination, with clad aluminum downlight relector for task lighting. Fixtures have a twist lock socket for secure, easy relamping. Dimming and emergency battery backup is available for CFL. U.L. listed for damp locations.

6222
Fluorescent




6223
Metal Halide
70/100W




**BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM**

FLUORESCENT

1-42W PLT



CP DISTRIBUTION

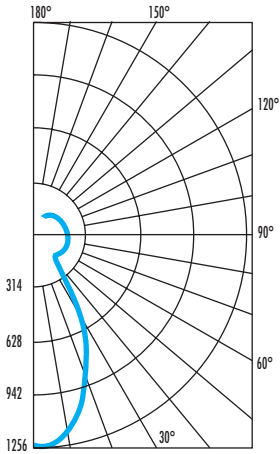

COEFFICIENTS OF UTILIZATION

	% CEILING 80 (20% FLOOR)		
	% WALL 70	50	30
0	73	73	73
1	65	61	58
2	59	54	49
3	54	48	42
4	50	43	37
5	46	39	33
6	43	35	30
7	40	32	27
8	37	29	24
9	35	27	22
10	33	25	20

NOTES

6222.42

1-42W triple tube
G24q-3 electronic twist lock socket
Total lumens: 3200
Spacing criteria: .78

METAL HALIDE
Use only medium base, coated and
protected, ceramic metal halide
ED17 lamps.


BALLAST INFO

DIMMING

- Ballast mounted inside fixture.
- Voltage *must* be specified.
- Controls lumen output down to $\pm 5\%$.
- Compatible dimmers required for all ballasts.
- **D3** Advance Mark X for 26, 32 or 42W lamp.
- **D4** Lutron Tu-Wire for 26 or 32W lamp. 120V *only*.
- **D5** Advance Mark VII for 26, 32 or 42W lamp.
- **D8** Lutron Hi-Lume 1% for 26 or 32W lamp. Controls lumen output down to $\pm 1\%$.
- **D9** Lutron EcoSystem for 18, 26, 32 or 42W lamp. Controls lumen output down to $\pm 5\%$.

EMERGENCY

- Voltage *must* be specified.
- **EM** emergency power provides 650 lumens for one lamp for 90 minutes. Ht.=14.375"
- **EM13** emergency power provides 1300 lumens for one lamp for 90 minutes. Ht.=19"

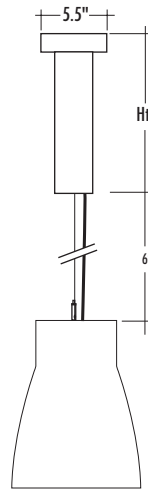

OPTIONS

AL-Acrylic Lens. For security and food service installations. Use with CFL lamps *only*.