

SWING T5 2-PIECE 115° PERFORATED DIFFUSER

12 SERIES

2-Piece 115° Perforated Diffuser



TYPE:	Model#	Voltage	Options *	Dimming *	
ORDER NUMBER:		1-120V	SAC	SPF3	SD3
		2-277V	SEM	SPF4	SD5
			SMB	SPF5	SD8
			SWRB		SD9
PROJECT:					SD10

*See back page for details.

Run Length:


(enter in multiples of 4 ft.)

Please review mounting info before ordering.

Stand Alone

Fixture, rail and end caps included.


Model #	Length	Wattage
SW44228.412	4'	28
SW44254.412	4'	54

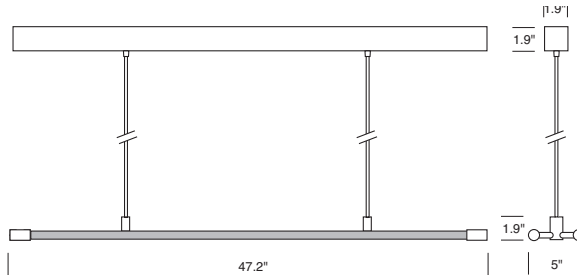

Continuous Run

Rail parts must be ordered separately.


Model #	Length	Wattage
SW64228.412	4'	28
SW64254.412	4'	54

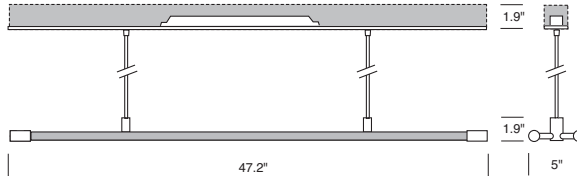

Stand Alone

Fixture, rail and end caps included.


Model #	Length	Wattage
SW54228.412	4'	28
SW54254.412	4'	54



Continuous Run

Rail parts must be ordered separately.

Model #	Length	Wattage
SW74228.412	4'	28
SW74254.412	4'	54



DELRAY
LIGHTING
INCORPORATED


SW6 & SW7 / 12

BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM

DEC 2011

4' 54W

2-54W T5



SW44254.412


2-54W T5 HO

G5 socket

Total lumens: 10000 mean

Total luminaire efficiency: 63.6%

CP DISTRIBUTION

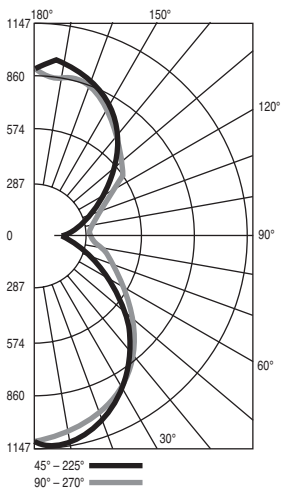

COEFFICIENTS

% CEILING 80	(20% FLOOR)		
% WALL 70	50	30	
0	69	69	69
1	61	58	55
2	55	50	45
3	50	43	38
4	45	38	32
5	42	34	28
6	38	30	24
7	35	27	21
8	32	24	19
9	30	22	17
10	28	20	15

SWING CONSTRUCTION

- Cast zinc aluminum alloy and aluminum extrusion construction.
- G5 twist-in lamp holders.
- U.L. listed for damp locations.

DOUBLE LAMP PENDANT

- Two adjustable 8 ft. gray 600V, 18/5 AWG power cords.
- Universal standard output 120/277V, 50/60 Hz electronic ballast, in a remote housing.

- Dimming and emergency battery available. Pendant distance may not exceed 3 ft. (See options at right.)
- Back plate has 7/8" opening for direct conduit feed.

DOUBLE LAMP SURFACE

- Integral universal standard output 120/277V, 50/60 Hz electronic ballast.
- Back plate has 7/8" opening for direct 14 AWG conduit feed.
- Dimming and emergency battery available. (See options at right.)

OPTIONS

DIMMING BALLASTS


Dimming ballast replaces standard canopy. All ballasts require compatible dimmers. Voltage must be specified.

Cat. #	Type	Wattage
SD3	Advance Mark X	54
SD5	Advance Mark VII	54
SD8	Lutron Hi Lume FDB	28/54
SD9	Lutron Eco System	28/54
SD10	Stepped dim, 50% for 2x28 only	2x28

MOUNTING INFORMATION

SW6 and SW7 Swing rail housings ship with one power input opening (as shown below) for direct connection to conduit using third party 1/2" fittings. To locate the power input elsewhere, alternative 7/8" openings may be drilled on the job site, anywhere along the top of the

aluminum rail housing. All double Swing fixtures have the option to suspend with aircraft cable (**SAC**) and optional power feed canopy (**SPF3**, **SPF4** and **SPF5**) with silver braided cord.

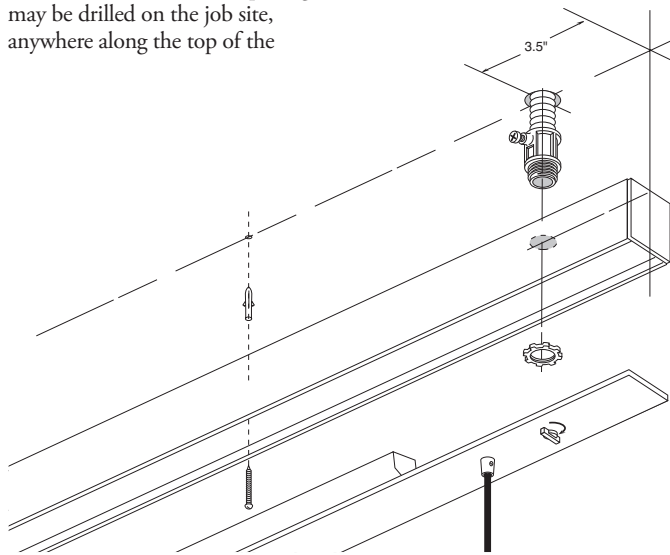


EMERGENCY BALLASTS


Emergency ballast provides 825 lumens for 90 minutes. Charge indicator light and test switch visible from below. Voltage must be specified. Order **SEM**.

BALLAST HOUSING BOX COVER

Order **S100P** to mount ballast to a recessed J-box.



CONTINUOUS SUSPENDED ROWS

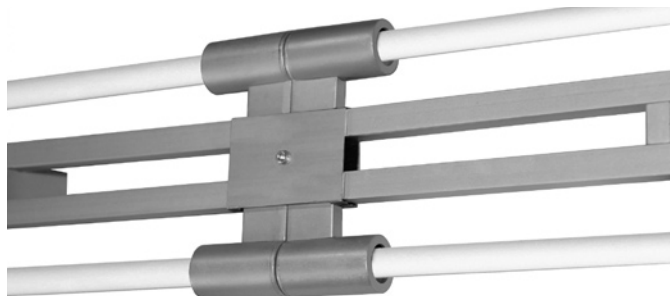

For two or more pendant fixtures mounted end to end, order and install **SDC** swing double connector to align

fixtures and prevent inter-fixture collision.