

SWING T5 180° SOLID ANODIZED LAMP SHIELD

23 SERIES

180° Solid Anodized Lamp Shield
with 360° Rotation



TYPE:

Model#

Voltage

Options*

Dimming*

ORDER NUMBER:

1-120V
2-277V

SAC
SEM
SMB
SWRB

SPF3
SPF4
SPF5

SD3
SD5
SD8
SD9
SD10

PROJECT:

**See back page for details.*

Run Length:


(enter in multiples of 4 ft.)

Please review mounting info before ordering.

Stand Alone

Fixture, rail and end caps included.


Model #	Length	Wattage
SW44228.423	4'	28
SW44254.423	4'	54

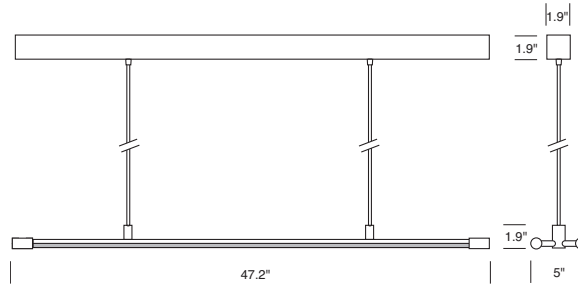

Continuous Run

Rail parts must be ordered separately.


Model #	Length	Wattage
SW64228.423	4'	28
SW64254.423	4'	54

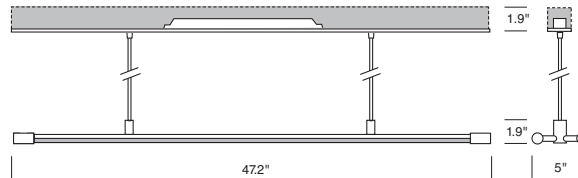

Stand Alone

Fixture, rail and end caps included.


Model #	Length	Wattage
SW54228.423	4'	28
SW54254.423	4'	54



Continuous Run

Rail parts must be ordered separately.

Model #	Length	Wattage
SW74228.423	4'	28
SW74254.423	4'	54



DELRAY
LIGHTING
INCORPORATED


SW6 & SW7 / 23

BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM

DEC 2011

4' 54W

2-54W T5



SW44254.423


2-54W T5 HO

G5 socket

Total lumens: 10000 mean

Total luminaire efficiency: 56.4%

CP DISTRIBUTION

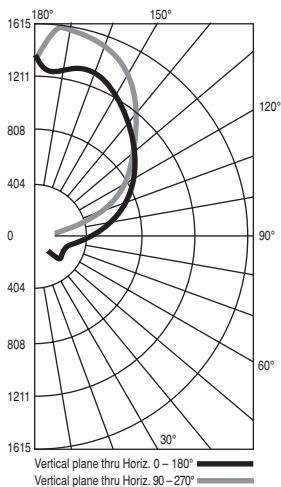

COEFFICIENTS

% CEILING 80	(20% FLOOR)		
% WALL 70	50	30	
0	55	55	55
1	49	46	44
2	44	40	36
3	40	35	31
4	37	31	26
5	33	27	23
6	31	24	20
7	28	22	17
8	26	19	15
9	24	18	14
10	22	16	12

SWING CONSTRUCTION

- Cast zinc aluminum alloy and aluminum extrusion construction.
- G5 twist-in lamp holders.
- U.L. listed for damp locations.

DOUBLE LAMP PENDANT

- Two adjustable 8 ft. gray 600V, 18/5 AWG power cords.
- Universal standard output 120/277V, 50/60 Hz electronic ballast, in a remote housing.

- Dimming and emergency battery available. Pendant distance may not exceed 3 ft. (See options at right.)
- Back plate has 7/8" opening for direct conduit feed.

DOUBLE LAMP SURFACE

- Integral universal standard output 120/277V, 50/60 Hz electronic ballast.
- Back plate has 7/8" opening for direct 14 AWG conduit feed.
- Dimming and emergency battery available. (See options at right.)

OPTIONS

DIMMING BALLASTS


Dimming ballast replaces standard canopy. All ballasts require compatible dimmers. Voltage must be specified.

Cat. #	Type	Wattage
SD3	Advance Mark X	54
SD5	Advance Mark VII	54
SD8	Lutron Hi Lume FDB	28/54
SD9	Lutron Eco System	28/54
SD10	Stepped dim, 50% for 2x28 only	2x28


MOUNTING INFORMATION

SW6 and SW7 Swing rail housings ship with one power input opening (as shown below) for direct connection to conduit using third party 1/2" fittings. To locate the power input elsewhere, alternative 7/8" openings may be drilled on the job site, anywhere along the top of the

aluminum rail housing. All double Swing fixtures have the option to suspend with aircraft cable (**SAC**) and optional power feed canopy (**SPF3**, **SPF4** and **SPF5**) with silver braided cord.

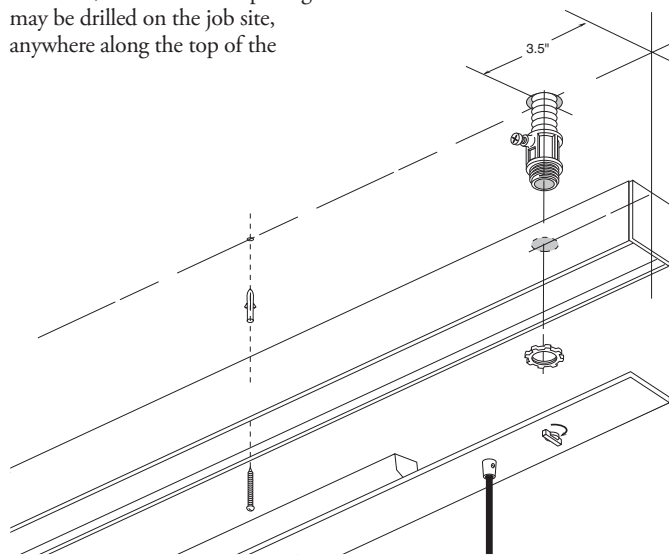

CONTINUOUS SUSPENDED ROWS

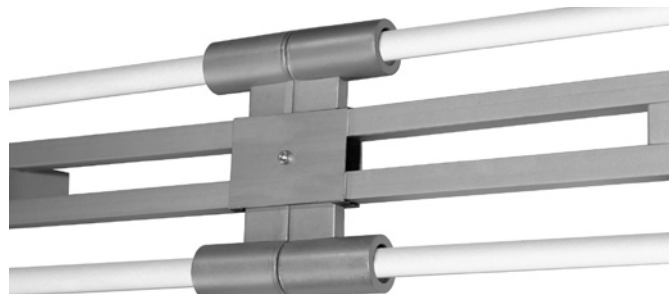

For two or more pendant fixtures mounted end to end, order and install **SDC** swing double connector

to align fixtures and prevent inter-fixture collision.

EMERGENCY BALLASTS

Emergency ballast provides 825 lumens for 90 minutes. Charge indicator light and test switch visible from below. Voltage must be specified. Order **SEM**.

BALLAST HOUSING BOX COVER

Order **S100P** to mount ballast to a recessed J-box.

