


SWING T5 DOUBLE LAMP PENDANT AND SURFACE

DELRAY
LIGHTING
INCORPORATED

SW6 & SW7 / BARE

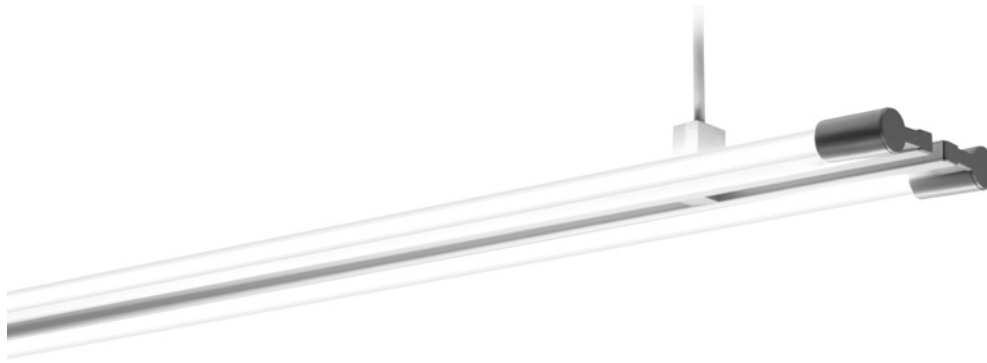

TYPE:	Model#	Voltage	Options *	Dimming*	
ORDER NUMBER:		1-120V	SAC	SPF3	SD3
		2-277V	SEM	SPF4	SD5
			SMB	SPF5	SD8
			SWRB		SD9
PROJECT:					SD10

**See back page for details.*


Run Length:
(enter in multiples of 4 ft.)

Please review mounting info before ordering.

Stand Alone

Fixture, rail and end caps included.


Model #	Length	Wattage
SW44228	4'	28
SW44254	4'	54

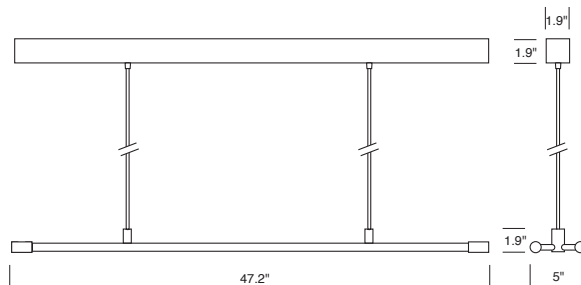

Continuous Run

Rail parts must be ordered separately.


Model #	Length	Wattage
SW64228	4'	28
SW64254	4'	54

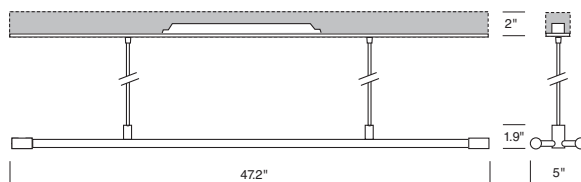

Stand Alone

Fixture, rail and end caps included.


Model #	Length	Wattage
SW54228	4'	28
SW54254	4'	54



Continuous Run

Rail parts must be ordered separately.


Model #	Length	Wattage
SW74228	4'	28
SW74254	4'	54



BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM

4' 54W

2-54W T5



SW44254


2-54W T5 HO

G5 socket

Total lumens: 10000 mean

Total luminaire efficiency: 99%

CP DISTRIBUTION

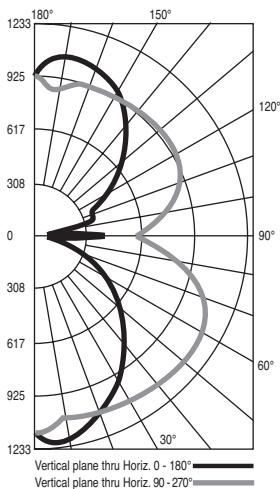

COEFFICIENTS

% CEILING 80 (20% FLOOR)

% WALL	70	50	30
0	106	106	106
1	92	86	81
2	83	73	66
3	75	63	55
4	68	55	46
5	62	49	40
6	57	43	34
8	48	35	27
9	45	32	24
10	42	29	21

SWING CONSTRUCTION

- Cast zinc aluminum alloy and aluminum extrusion construction.
- G5 twist-in lamp holders.
- U.L. listed for damp locations.

DOUBLE LAMP PENDANT

- Two adjustable 8 ft. gray 600V, 18/5 AWG power cords.
- Universal standard output 120/277V, 50/60 Hz electronic ballast, in a remote housing.

- Dimming and emergency battery available. Pendant distance may not exceed 3 ft. (See options at right.)
- Back plate has 7/8" opening for direct conduit feed.

DOUBLE LAMP SURFACE

- Integral universal standard output 120/277V, 50/60 Hz electronic ballast.
- Back plate has 7/8" opening for direct 14 AWG conduit feed.
- Dimming and emergency battery available. (See options at right.)

OPTIONS

DIMMING BALLASTS


Dimming ballast replaces standard canopy. All ballasts require compatible dimmers. Voltage must be specified.

Cat. #	Type	Wattage
SD3	Advance Mark X	54
SD5	Advance Mark VII	54
SD8	Lutron Hi Lume FDB	28/54
SD9	Lutron Eco System	28/54
SD10	Stepped dim, 50% for 2x28 only	2x28


MOUNTING INFORMATION

SW6 and SW7 Swing rail housings ship with one power input opening (as shown below) for direct connection to conduit using third party 1/2" fittings. To locate the power input elsewhere, alternative 7/8" openings may be drilled on the job site, anywhere along the top of the

aluminum rail housing. All double Swing fixtures have the option to suspend with aircraft cable (**SAC**) and optional power feed canopy (**SPF3**, **SPF4** and **SPF5**) with silver braided cord.

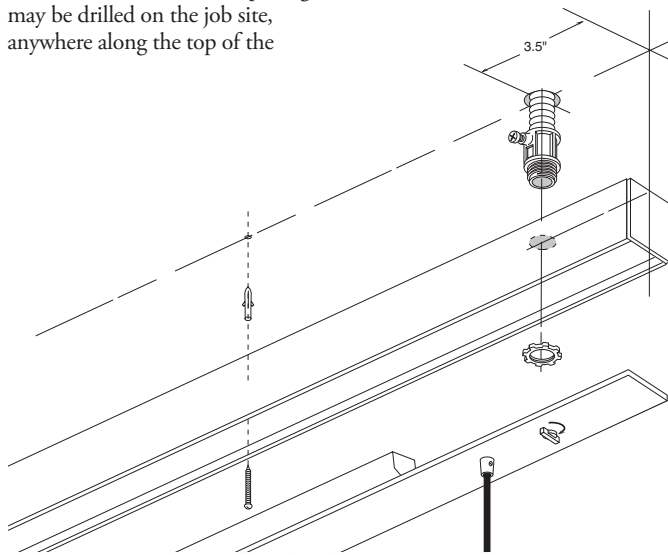

CONTINUOUS SUSPENDED ROWS

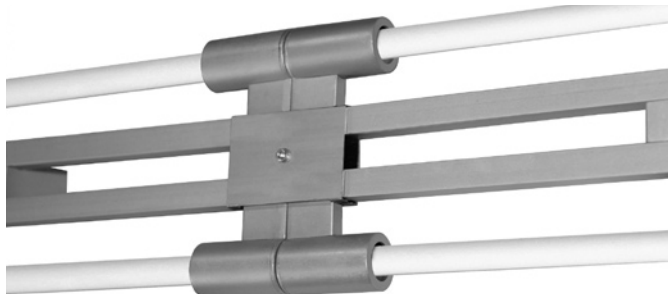

For two or more pendant fixtures mounted end to end, order and install **SDC** swing double connector to align

fixtures and prevent inter-fixture collision.

EMERGENCY BALLASTS

Emergency ballast provides 825 lumens for 90 minutes. Charge indicator light and test switch visible from below. Voltage must be specified. Order **SEM**.

BALLAST HOUSING BOX COVER

Order **S100P** to mount ballast to a recessed J-box.

