
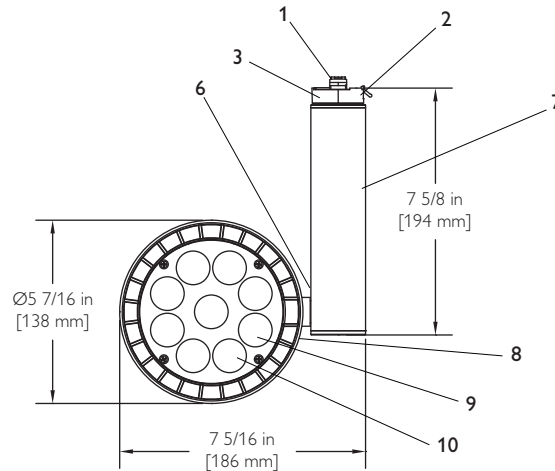


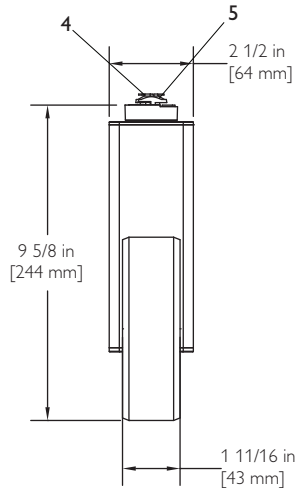

Features

- 1. Track attachment fitting:** Molded polycarbonate. Integral color in gray, black or white. Rotates in to track and locks into place with the use of push tab.
- 2. Push tab:** Molded polycarbonate. Locks and detaches unit.
- 3. Track adapter housing:** Die cast aluminum. Steel eyelet friction connection. Rotates 350°.
- 4. Movable contact:** Solid Brass. Extends for connection to 2cd circuit in Advent track.
- 5. Ground contact:** Solid Brass.
- 6. Vertical pivot mount:** Stainless steel eyelet friction connection. Rotates +/-90° from vertical aim to floor.
- 7. Driver housing:** Extruded aluminum with die cast aluminum end caps.
- 8. Integrated heat sink:** Die cast aluminum effectively cools leds providing a minimum 50,000 hr lifetime at 70% lumen maintenance.
- 9. Optic assembly:** Efficient TIR (total internal reflection) optically clear thermoplastic lenses held securely by frosted translucent thermoplastic holder. Positive securement into luminair with screws and accurately positioned on leds with locating pins. Prevents dust and contaminants from entering led compartment.
- 10. Light source:** 9 high brightness white led. 80-85 CRI, LEDs selected for tight color consistency between luminaires single 3 step MacAdam ellipse max.

Accessories: Requires 8595 accessory holder.

Accepts two accessories.

Snoot: 23SNT6WH/BK/AL

Louver: AL4HC Series

Diffusion/special filters: AF4 Series

Color filters: ADF4 Series*

Mounting


For use with Lytespan Basic, Advent, Radius track, and monopoints. May be used with Lytespan to ProSpec adaptor 26075BK/WH when ProSpec track is preferred.

Finish

Powder coated finish

* will project colored light on ceiling.

Job Information	Type:
Job Name:	
Cat. No.:	
Notes:	

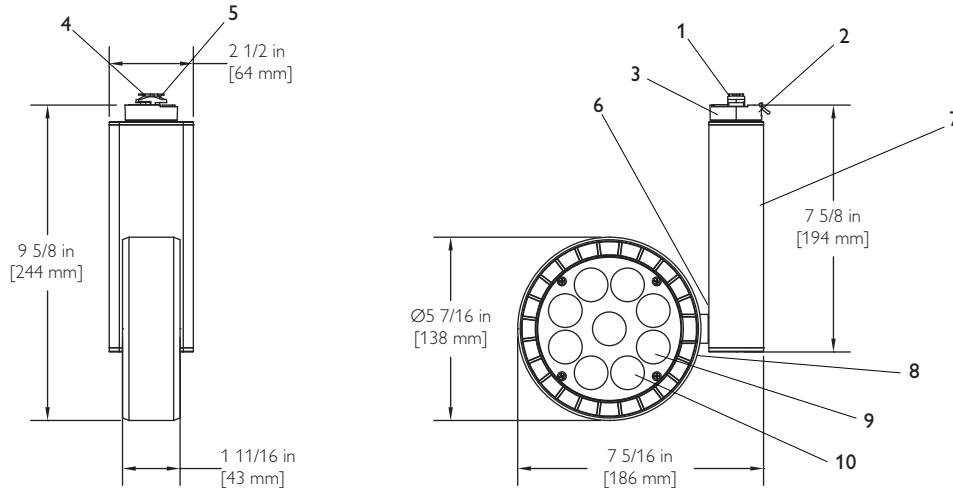

Ordering information

Cat. No.	Finish	Description	CCT	CRI
LLAB030RSWH	White	Spot	3000K	85
LLAB030RSAL	Aluminum			
LLAB030RSBK	Black			
LLAB030RNFWH	White	Narrow Flood	3000K	85
LLAB030RNFAL	Aluminum			
LLAB030RNFBK	Black			
LLAB030RFWH	White	Flood	3000K	85
LLAB030RFAL	Aluminum			
LLAB030RFBK	Black			
LLAB027RSWH	White	Spot	2700K	85
LLAB027RSAL	Aluminum			
LLAB027RSBK	Black			
LLAB027RNFWH	White	Narrow Flood	2700K	85
LLAB027RNFAL	Aluminum			
LLAB027RNFBK	Black			
LLAB027RFWH	White	Flood	2700K	85
LLAB027RFAL	Aluminum			
LLAB027RFBK	Black			

Electrical

Input voltage: 120V 50/60Hz

Lumen maintenance: >70% of initial lumens @ 50,000 hrs

Photometric performance: Tested in accordance to LM79

Nominal input power: 15W

Power factor: >.9

Beam Spread	Delivered Lumens (3000K)	Efficacy	CBCP
10°	1038	65	24,431
22°	975	61	4,088
36°	909	57	2,018

Dimming: ELV

Lightolier Controls: ZP425QE

Lutron Skylark: SELV-300P-WH

Leviton Decora: IPE04-ILX

Labels

cULus listed. 5 year warranty

Energy Star qualified

Job Information Type:


PHILIPS
LIGHTOLIER

Aiming angle

L Beam length **D** Distance
W Beam Width **A** Aiming Angle
C Distance to center beam **FC** Footcandles

L and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam. Data shown is for 3000K, for 2700K multiply FC by 0.91.

CBCP = Center Beam Candle Power.

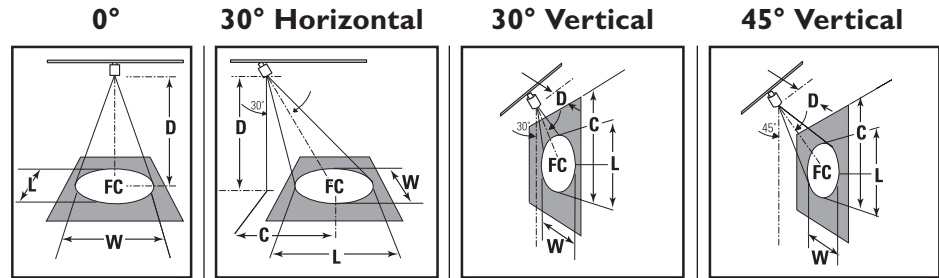

	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	0°					30° Horizontal					30° Vertical					45° Vertical				
				D	FC	L	W		D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
LLAB030RS		24431	50,000	12	170	2.1	2.1		12	6.9	110	2.8	2.4	5	8.7	122	3.6	1.7	6	6.0	240	2.1	1.5
				14	125	2.4	2.4		14	8.1	81	3.3	2.8	6	10.4	85	4.3	2.1	7	7.0	176	2.5	1.7
				16	95	2.8	2.8		16	9.2	62	3.7	3.2	7	12.1	62	5.0	2.4	8	8.0	135	2.8	2.0
				18	75	3.1	3.1		18	10.4	49	4.2	3.6	8	13.9	48	5.7	2.8	9	9.0	107	3.2	2.2
LLAB030RNF		4088	50,000	6	114	2.3	2.3		6	3.5	74	3.1	2.7	2	3.5	128	3.5	1.6	3	3.0	161	2.4	1.6
				8	64	3.1	3.1		8	4.6	41	4.2	3.6	3	5.2	57	5.3	2.3	4	4.0	90	3.2	2.2
				10	41	3.9	3.9		10	5.8	27	5.2	4.5	4	6.9	32	7.0	3.1	5	5.0	58	4.0	2.7
				12	28	4.7	4.7		12	6.9	18	6.3	5.4	5	8.7	20	8.8	3.9	6	6.0	40	4.8	3.3
LLAB030RF		2018	50,000	5	81	3.2	3.2		5	2.9	52	4.5	3.8	2	3.5	63	7.6	2.6	3	3.0	79	4.4	2.8
				6	56	3.9	3.9		6	3.5	36	5.4	4.5	3	5.2	28	11.4	3.9	4	4.0	45	5.8	3.7
				7	41	4.5	4.5		7	4.0	27	6.3	5.3	4	6.9	16	15.2	5.2	5	5.0	29	7.3	4.6
				8	32	5.2	5.2		8	4.6	20	7.2	6.0	5	8.7	10	19.0	6.5	6	6.0	20	8.7	5.5



Philips Lightolier
 e: lol.webmaster@philips.com
 t: (508) 679-8131
 w: www.lightolier.com

LLAB0 March 26, 2012

Specifications are subject to change without notice.
 © Koninklijke Philips Electronics N.V., 2010. All rights reserved.

Job Information Type: