


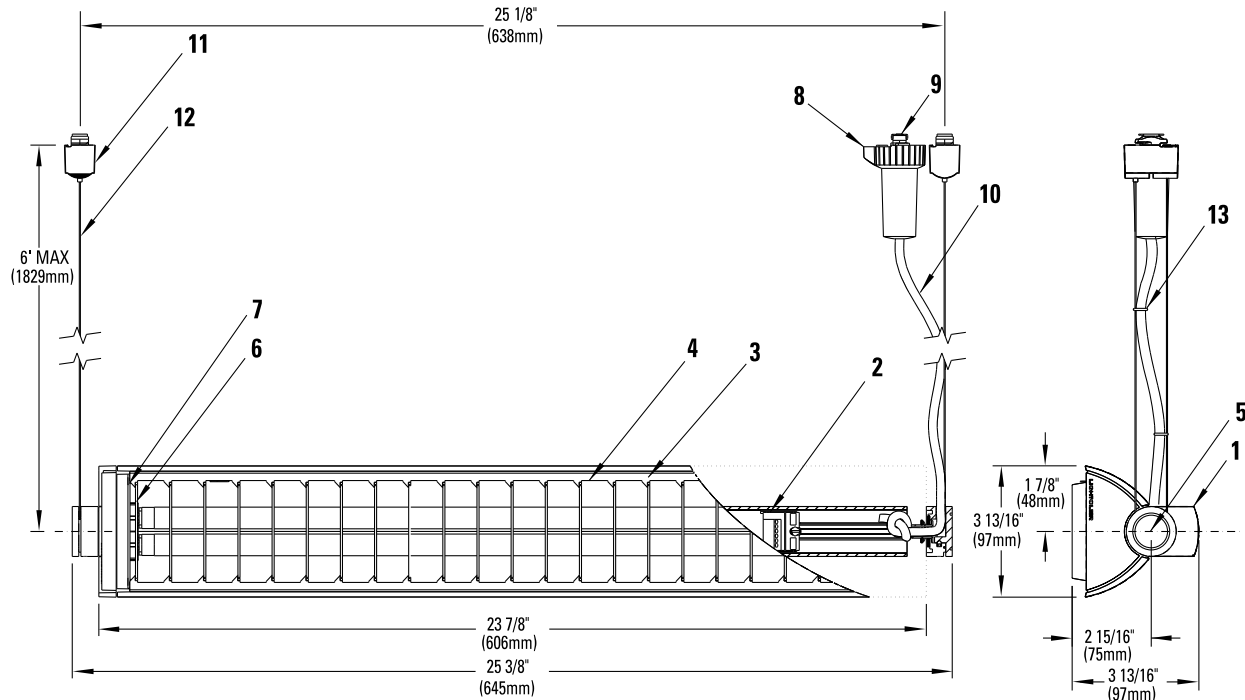

Ordering Information

Catalog No.	Finishes	Track Mountings	Lamps
9279WH 9279TM 9279AL	Matte White Dark Titanium Metallic Aluminum	Compatible with all Lytespan® Track Systems.	2 x 24w T5 High Output (Fluorescent)
9280WH 9280TM 9280AL	Matte White Dark Titanium Metallic Aluminum	Not compatible with ProSpec Track, Clamp-On Monopoint, Slope Ceiling Adapter or Extension Wands.	1 x 24w T5 High Output (Fluorescent)

Features

- Ballast & Reflector Housing:** Aluminum with die-cast endcaps.
- Ballast:** 24w electronic.
- Flood Reflector:** Aluminum, with high reflectivity and semispecular finish for a smooth wash of light.
- Louver:** Aluminum, for glare control with captive locking springs for easy installation and removal.
- Vertical Pivot:** Die cast rotation housing with positive rotation stop provides 360° max. vertical rotation for uplight and downlight aiming.
- Sockets:** 600v rated mini bi-pin sockets with 90° rotor lock to engage contacts and retain with a positive detent.
- Socket Bracket:** Adjustable steel mounting bracket slides out for easy lamping and relamping.
- Power Stem:** High temperature molded polycarbonate, secures mechanically into track and makes electrical contact to energize the luminaire.
- Brass Contact:** Extends for connection to second circuit in Advent® Lytespan track.
- Power Cord:** 18 ga, 105°C, SVT insulated flexible cord. 6' supplied.
- Cable Suspension Housing:** Molded polycarbonate with Griplock® cable wrap-around feature for suspension height adjustability, covers with snap-in feature.
- Dual Cable Suspension:** 1/32" diameter stranded stainless steel cable, up to 6' max suspension adjustability from ceiling.
- Cord Retainer:** Attaches to suspension cable for neat cord dressing suspension.

Electrical

Rapid Start High Power Factor, Class P Electronic Ballast

Power Factor: >.97%

Sound Rated: A

Minimum Start Temp: 0°F

Electrical (continued)

Input Watts:	9279	52W
	9280	26W

Finish

All painted finishes are baked enamel.

Labels

UL, c.U.L.

Advent® is a registered trademark of Lightolier.

GripLock® is a registered trademark of Reutlinger GripLock Systems.

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Notes:

Lightolier a Genlyte Thomas Company

www.lightolier.com

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710


We reserve the right to change details of design, materials and finish.

© 2003 Genlyte Thomas Group LLC (Lightolier Division) • C0603

LIGHTOLIER®


Lighting Data 2 - 24W T5 High Output

Footcandles on wall:

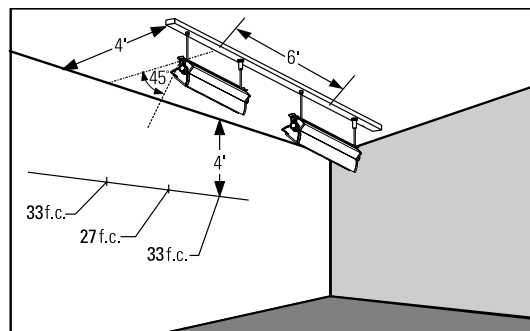

EXAMPLE: With track located 4' from wall and multiple units spaced 6' on center and aimed 45° from horizontal, the illumination on wall 4' from luminaire will be 33 f.c. beneath units and 27 f.c. between units.


Lamp Information:
2 X 24W T5 High Output
Mini Bi Pin Fluorescent

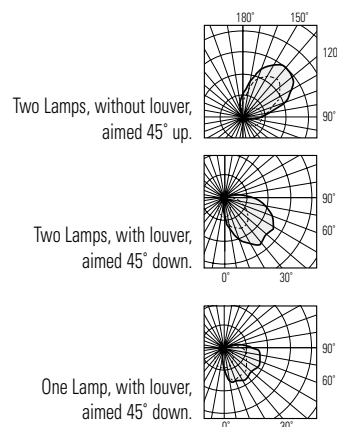

Footcandles on Wall

Track 3 Feet From Wall

Single Unit

		0'	1'	2'	3'	4'	5'	
Distance From Luminaire				 Beam Center				
	1'	100	78	40	18	9	5	
	2'	78	62	35	16	7	3	
	3'	48	41	26	15	7	3	
	4'	31	27	19	12	7	4	
	5'	18	16	12	8	5	3	
	6'	11	11	8	6	4	3	
	7'	7	7	6	4	3	2	
	8'	5	5	4	3	2	2	
	9'	3	3	3	2	2	2	

Multiple Units

111	58	111
84	50	84
54	41	54
41	35	41
24	21	24
19	18	19
13	12	13
9	9	9
7	7	7

A diagram showing two rows of chairs facing each other. The distance between the two rows is labeled as 6' (feet). The chairs are represented by vertical rectangles.

Track 4 Feet From Wall

Single Unit

				0'	1'	2'	3'	4'	5'
				 Beam Center					
Distance From Luminaire	1'	54	44	27	13	5	1		
	2'	53	45	30	16	8	4		
	3'	39	34	24	15	8	4		
	4'	29	25	19	13	8	5		
	5'	20	18	15	11	7	5		
	6'	13	12	10	8	6	4		
	7'	9	9	7	6	4	3		
	8'	7	6	5	5	4	3		
	9'	5	4	4	3	3	2		

A diagram of a horizontal beam supported by two vertical supports. A double-headed arrow above the beam indicates a distance of 4' between the supports. Below the beam, there is a table of values:


62	53	62
69	62	69
56	52	56
46	44	46
38	37	38
27	26	27
20	20	20
17	17	17
13	13	13

Multiple Units

54	25	54
56	32	56
43	29	43
33	27	33
28	24	28
19	17	19
14	13	14
12	12	12
9	9	9

Track 5 Feet From Wall

Single Unit

				0'	1'	2'	3'	4'	5'	
Distance From Luminaire				 Beam Center						
	1'			37	32	23	15	9	5	
	2'			37	33	24	16	10	6	
	3'			33	30	23	16	10	6	
	4'			24	22	17	13	9	5	
	5'			18	17	14	10	8	5	
	6'			14	13	11	9	7	5	
	7'			10	10	8	7	5	4	
	8'			7	7	6	5	4	3	
	9'			6	5	5	4	3	3	

Multiple Units

49	42	49
51	45	51
49	45	49
36	34	36
30	29	30
25	24	25
21	20	21
15	15	15
13	13	13

A diagram showing a 3x3 grid of squares. The top row of squares is shaded gray. Above the grid, a horizontal line with arrows at both ends is labeled "6'".

44	32	44
45	35	45
44	36	44
32	28	32
25	23	25
22	20	22
18	17	18
13	12	13
11	11	11

Footcandles are average and rounded off and data for multiple units are based on a minimum of five units.

Job Information

Type:

Lightolier a Genlyte Thomas Company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2003 Genlyte Thomas Group LLC (Lightolier Division) • C0603

LIGHTOLIER®