


# Nyhavn Maxi Pendant

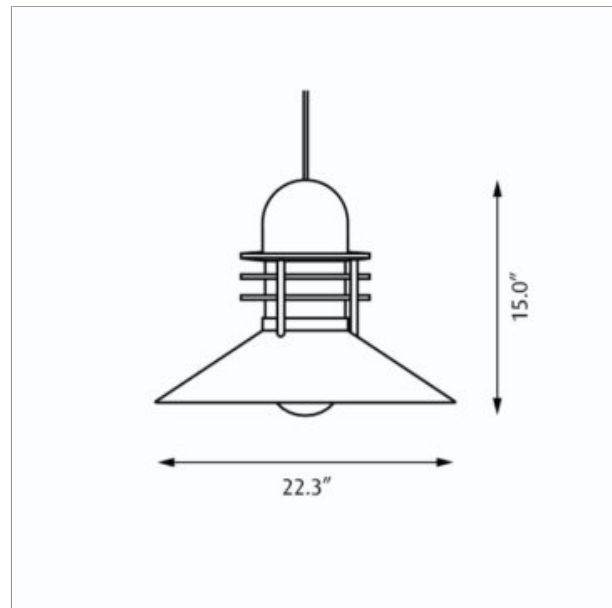

Design: Alfred Homann

Concept: The conical shade ensures comfortable light that is directed downwards in a wide beam. The shade interior has a white matte painted surface, ensuring uniform light distribution. The rings ensure that a stray light is controlled, and direct a small amount of light onto the top side of the shade for self-illumination.

Finish: Copper, brushed. Copper, brushed and lacquered. Natural painted aluminum or white, powder coated.

Material: Canopy: Die cast aluminum or spun aluminum. Shades: Spun aluminum or spun copper. Diffuser: Injection molded clear polycarbonate, injection molded partly frosted polycarbonate or injection molded white opal polycarbonate. Rings: Die cast aluminum or copper plated, die cast red brass. Top: Die cast aluminum or copper plated, die cast red brass. Pendant stem: Extruded aluminum or copper plated red brass.

Mounting: Suspension type: 1x PVC covered stainless steel aircraft cable or pendant stem. Suspension length: 12' cord or 3' stem. Canopy: White. Cord type: 3-conductor, 18 AWG PVC power cord. Cord color: Natural and copper version: Black cord or white version: white cord. Cord length: 12'. Canopy mounting: Directly to a recessed ballast box (10.7" diameter x 3.6" D) provided or directly to finished surface over a recessed 4" octagonal junction box.

Weight: Max. 41 lbs.

Label: cULus, Damp location, Wet location. IBEW.

Product code	Light source	Voltage	Finish	Suspension	Mounting
NYP-MAX	1/70W/CMH/T-6 G12 1/100W/MH/ED-17 medium 1/26W/32W/42W/CF GX24q-3/4	120/208/240/277V 120-277V 120/277V	COP LAC COP NAT PAINT ALU WHI	12 ft. CORD 3 ft. STEM	INDOOR OUTDOOR

**Specification notes**

- a. CMH variants provided with a partly frosted diffuser.
- b. CF variants provided with an opal diffuser.
- c. MH variants provided with clear diffuser.
- d. CMH variants provided with one 120/277V remote mounted F-can ballast.
- e. CF variants provided with an universal wattage socket and 120-277V integral electronic ballast.
- f. MH variants provided with a recessed ballast box containing one 120/208/240/277V open core and coil ballast.
- g. 3 ft. pendant stem for outdoor version.
- h. 12 ft. cord/cable for indoor version.

**Info notes**

- I. All diffusers are U.V. stabilized polycarbonate.
- II. Copper variants for indoor use is brushed and lacquered.
- III. Copper variants for outdoor use is untreated copper that will develop a verdigris patina.
- IV. The comparable EU version has the following classification: Ingress Protection Code: IP20.