
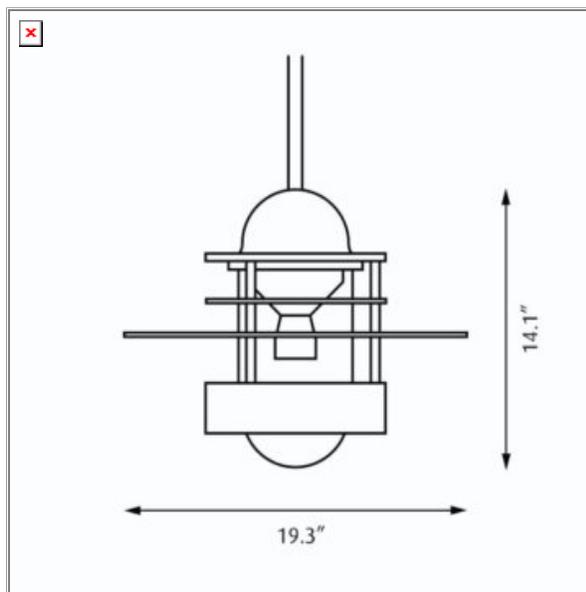


Albertslund Maxi Pendant

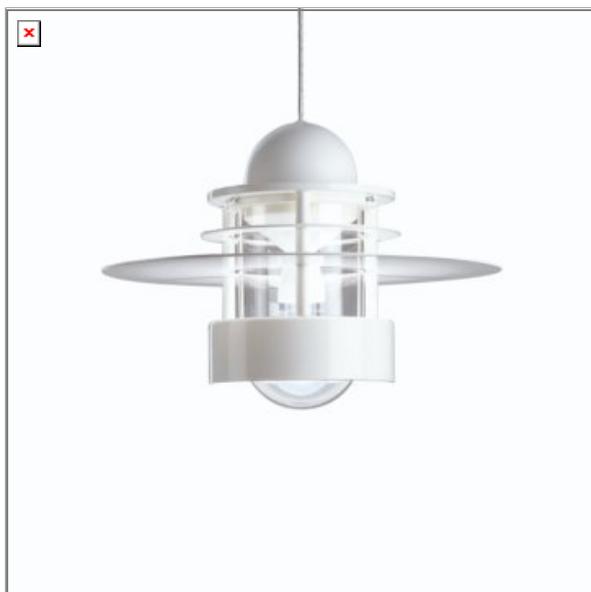

Design: Jens Møller-Jensen

Concept: The fixture provides characteristic symmetrical and functional lighting. The horizontal ring reflects the light downwards, but its position also allows some light to slip past and illuminate the ceiling. The anti-glare ring prevents from horizontal glare, and the diffuser is available either as clear, opal or partly frosted depending on the desired light source.

Finish: Natural painted aluminum or white, powder coated.

Material: Canopy: Die cast aluminum or spun aluminum. Diffuser: Injection molded clear polycarbonate, injection molded partly frosted polycarbonate or injection molded white opal polycarbonate. Saturn ring: Die cut aluminum. Anti-glare ring: Spun aluminum. Top: Die cast aluminum. Pendant stem: Extruded aluminum.

Mounting: Suspension type: 1x stainless steel aircraft cable, cable or pendant stem. Suspension length: 12' cord or 3' stem. Canopy: White. Cord type: 3-conductor, 18 AWG PVC power cord. Cord color: Natural version: Black cord or white version: white cord. Cord length: 12'. Canopy mounting: Directly to a recessed ballast box (10.7" diameter x 3.6" D) provided or directly to finished surface over a recessed 4" octagonal junction box.

Weight: Max. 26 lbs.

Label: cULus, Damp location, Wet location. IBEW.

Product code	Light source	Voltage	Finish	Diff./Encl./Glass	Suspension	Cable type	Mounting
ORP-MAX	1/70W/CMH/T-6 G12 1/100W/MH/ED-17 medium 1/26W/32W/42W/CF GX24q-3/4	120/208/240/277V 120-277V 120/277V	NAT PAINT ALU WHT	CLEAR OPAL PARTLY FROSTED	12 ft. CORD 3 ft. STEM	BLACK PLASTIC AND WIRE NOT APPLICABLE WHITE PLASTIC AND WIRE	INDOOR OUTDOOR

Specification notes

- a. CMH variants provided with a partly frosted diffuser.
- b. CF variants provided with an opal diffuser.
- c. MH variants provided with clear diffuser.
- d. CMH variants provided with one remote mounted 120/277V F-can ballast.
- e. CF variants provided with an universal wattage socket and 120-277V integral electronic ballast.
- f. MH variants provided with a recessed ballast box containing one 120/208/240/277V open core and coil ballast.
- g. 3 ft. pendant stem for outdoor version.
- h. 12 ft. cord/cable for indoor version.

Info notes

- I. All diffusers are U.V. stabilized polycarbonate.
- II. The comparable EU version has the following classification: Ingress Protection Code: IP20.

