
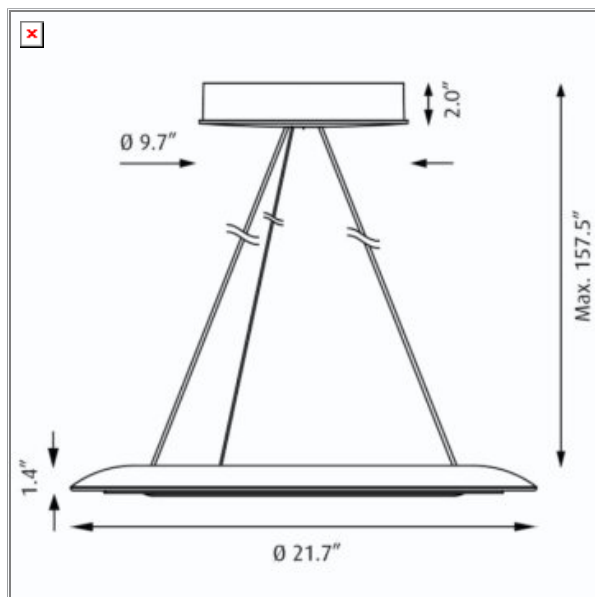


# F+P 550 LED

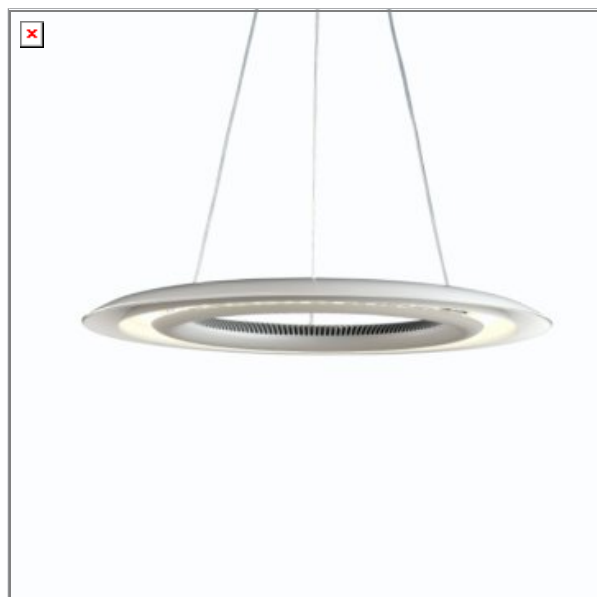

Design: Foster & Partners

Concept: The fixture emits 100% glare-free light directed primarily downwards. A light guide directs a portion of the light onto the glass, which becomes softly illuminated. The edge of the glass creates a decorative light effect.

Finish: Natural painted aluminum, powder coated. White opal glass.

Material: Canopy: Plastic. Shade: Die cast aluminum. Reflector: Spun aluminum. Enclosure: White opal glass.

Mounting: Canopy: white. Cord type: 3x 2-conductor, 20 AWG clear 20242 style power cord. Cord length: 12'.

Weight: Max. 12.1 lbs.

Label: cULus, Dry location. IBEW.

| Product code | Light source | Voltage  | Finish        | Diff./Encl./Glass | Cable type        |
|--------------|--------------|----------|---------------|-------------------|-------------------|
| F+P-550-P    | 30 LED White | 120-277V | NAT PAINT ALU | WHITE OPAL        | TRANSPARENT CABLE |

#### Specification notes

- a. All LED wattages are system power.
- b. LED variants provided with a 120-240V dimmable electronic driver.

#### Info notes

- I. Drivers are mounted in canopy. II. The comparable EU version has the following classification: Ingress Protection Code: IP20.
- II. LED technology is rapidly changing. Specifications are based on present technology. For most up to date specifications see [www.louispoulsen.com](http://www.louispoulsen.com).

