


# LP Centrum

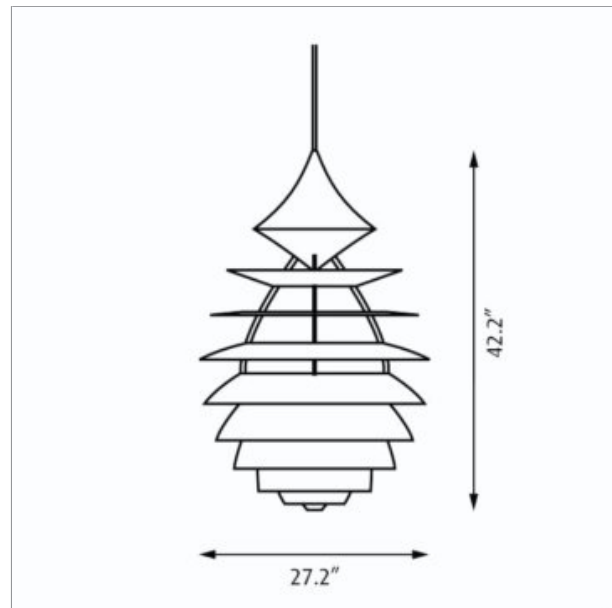

Design: Kurt Nørregaard, Poul Henningsen

Concept: The fixture provides 100% glare-free light. Its geometric design is based according to the mathematical lituus curve. All the illuminated surfaces are hit by the light at the same angle, casting the light into the room under the same conditions. This results in both horizontal and vertical light emission.

Finish: White, wet painted.

Material: Shades: Spun aluminum. Frame: Extruded, anodized aluminum. Suspension: Spun aluminum.

Mounting: Suspension type: 1x PVC covered stainless steel aircraft cable. Suspension length: 12'. Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

Weight: Max. 38 lbs.

Label: cULus, Dry location. IBEW.

Product code	Light source	Voltage	Finish
CEN-P	1/250W/MH/ED-28 mogul 1/500W/PS-35/CL mogul	120/208/240/277V 120V	WHT

**Specification notes**

- a. MH variants provided with 120/208/240/277V integral core and coil ballast.
- b. Incandescent variants only available in 120V.

**Info notes**

- I. The comparable EU version has the following classification: Ingress Protection Code: IP20.

**louis  
poulsen**