

MLLWP40LED50

LED WALLMAX - 40 SERIES LARGE WALL PACK



FEATURES:

- Replaces up to 175 Watt Metal Halide
- Universal 120-277V
- Maintenance free for up to 13 Years
- Mercury free; no UV
- Heavy-duty cast aluminum housing; rust and corrosion proof; polyester powdercoat
- High quality shatterproof glass.
- Sealed fixture is dirt and bug free
- Multiple knockouts for mounting convenience
- Occupancy/Dusk to Dawn sensor compatible
- LM-79/80 data available
- 5 Year Limited Warranty
- Does not attract insects

CONSTRUCTION:

Fixture: Heavy-duty cast aluminum one-piece housing; polyester powdercoat; rust and corrosion proof. Fixture is sealed to be dirt and bug proof.

Lens: High quality shatterproof glass

LED Module: Aluminum components in the LED module act as heat sinks to reduce heat and add to life. The module uses directional settings to control the fall of light and the light levels. This makes the fixture an efficient replacement for metal halide and high pressure sodium fixtures, while reducing wattage and extending life.

LED Driver: Self contained driver meets UL 1310 UL 48 Class2.

Finish: Dark Bronze or white finish available; polyester powdercoated.

Installation: Can mount to recessed outlet box or direct to surface.

Luminaire Ordering Information:

WATTS	ORDER CODE	MODEL NUMBER	DELIVERED LUMENS	LAMP LIFE (Hrs)	DIMENSIONS (L"xW"xH")	K
40	70723	MLLWP40LED50	2000	50,000	18.5 x 9.5 x 9.0	5000
40	71128	MLLWP40LED50W	2000	50,000	18.5 x 9.5 x 9.0	5000

Lighting layouts and spacing criteria available upon request

PROJECT NAME
CATALOG NUMBER
NOTES
FIXTURE TYPE




LED WALLMAX - 40 SERIES LARGE WALL PACK




SPECIFICATIONS:

Item	Specification	Details
General Performance	Spacing Criteria	Available upon request
	Color Temperature	5000K
	Lumens Delivered	2000
	Efficacy	50 lumen/watt
	Color Consistency	Proprietary binning for uniform color
	Lumen Maintenance (L70)	50,000 hours
Electrical	Power Factor	Over 98%
	Input Voltage	120V-277V 50/60 Hz
	Power Consumption	40 Watts
Physical	Dimensions	18.5" x 9.5" x 9.0"
	Weight	10.5 lbs
	Housing	Aluminum
	Lens	High quality shatterproof glass
	Mounting	Can mount to recessed outlet box or direct to surface.
	Operating Temperature	-30°F to 130°F
	Humidity	20% - 85% RH, non condensing
Certification	Certification	CETL, FCC, LM79, LM80
	Material Usage	RoHS compliant; no mercury
	Environment	Indoor / Outdoor
	LED Class	L70 rated to 50,000 hours

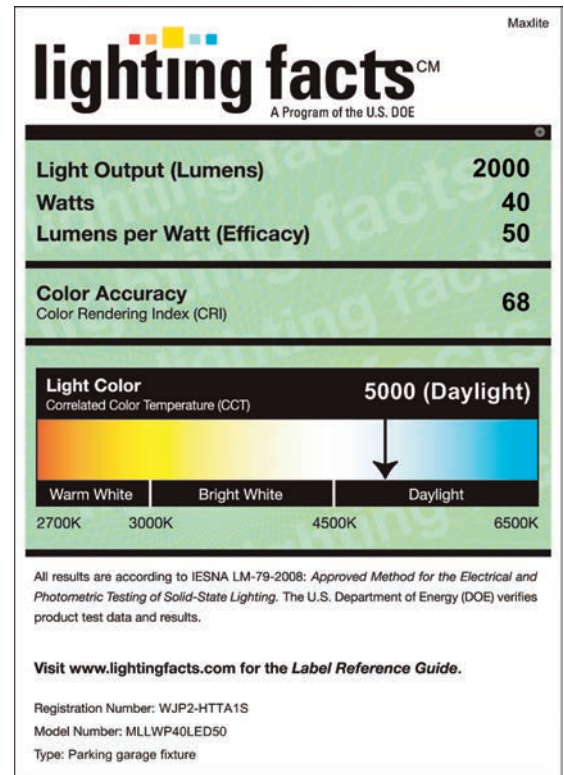

Lighting layouts and spacing criteria available upon request


DIMENSIONS:

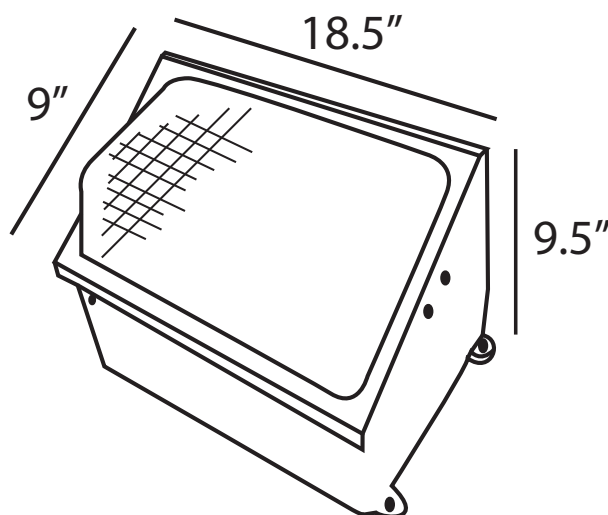

PHOTOMETRICS:

Intensity (Candlepower) Summary at 25°C - Candelas

Angle	0	22.5	45	67.5	90
MLLWP40LED50					
0	558	558	558	558	558
5	822	783	747	639	507
10	1019	888	882	778	543
15	1041	914	903	794	502
20	772	743	903	846	496
25	894	866	774	737	451
30	601	652	712	728	397
35	654	607	712	712	340
40	592	611	586	645	279
45	644	598	525	518	234
50	811	690	490	461	191
55	857	770	482	403	160
60	902	782	471	343	128
65	847	775	440	277	93
70	733	680	396	221	68
75	671	574	350	170	48
80	555	514	287	127	32
85	395	400	239	91	20
90	345	278	200	71	15
95	275	252	144	57	14
100	179	163	113	46	14
105	123	108	87	37	14
110	86	82	65	30	13
115	54	56	50	24	11
120	40	43	40	20	9
125	34	36	31	15	7
130	30	30	24	11	5
135	26	25	18	8	4
140	20	19	13	6	3
145	14	13	9	3	2
150	10	9	6	2	2
155	6	6	3	2	2
160	4	3	1	1	1
165	1	1	1	1	1
170	1	1	1	1	2

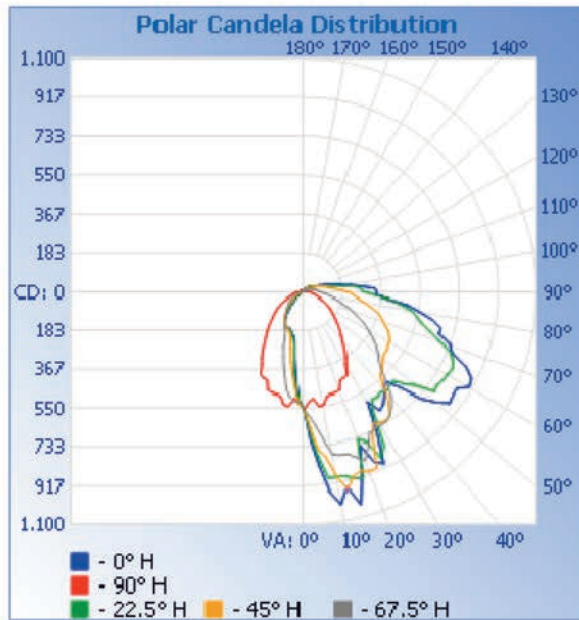

Lighting layouts and spacing criteria available upon request