

Incredible **100,000 hrs**

GENERAL DESCRIPTION

Neptun's 16" Induction shoebox combines classic form and versatility to make it an excellent choice for new construction or retrofit applications. The 16 series shoebox fixture is offered in a variety of wattages and mounting options to provide maximum flexibility in all types of applications. It can replace existing HID fixtures up to 400W.

APPLICATION

- Parking Lot Lighting
- Car Lot Lighting
- Area & Storage Lighting
- Street Lighting
- Walkway Lighting
- Building Accent Lighting

STRUCTURE, MATERIALS, & FEATURES

- Heavy-gauge, die-cast aluminum housing.
- Custom designed anodized aluminum reflectors for superior illuminance.
- Heat and impact resistant tempered flat glass lens. (IESNA full-cutoff)
- Integral structural support plate for mounting arm ensures strength.
- Corrosion resistant electrocoat dark bronze finish (custom colors available).
- Hinged aluminum door frame incorporates stainless steel hardware.
- Continuous silicone gasketing surrounds lens for weather - tight seal.
- Inductively coupled circular induction bulb.
- High power factor, low THD electronic ballast with surge protection.
- Instant-On flicker-free Cold Start and Hot Re-Start.
- High quality glare-free light with high CRI above (83).
- Bright white light (5000°K) for greater visibility and safety.
- Advance phosphors for high lumen output and high lumen maintenance.
- Up to 20 year maintenance free operation.
- 10 Year Warranty

ORDERING INFORMATION

Sample Number: 16080-UNV-850-SA6-LD-BRZ
Custom options and accessories available. Please consult factory.

Series	Lamp Wattage	Voltage	Color Temp	Mounting	Accessories	Color
16 = 16" Shoebox	080 = 80 W 100 = 100 W 120 = 120 W 150 = 150 W 200 = 200 W	UNV = Universal 480 = 480 V	830 = 3000°K 841 = 4100°K 850 = 5000°K * * Standard	SA6 = 6" Side Arm SA12 = 12" Side Arm WM6 = 6" Wall Mount WM12 = 12" Wall Mount SA6R = 6" Side Arm - Round Pole Adapter SA12R = 12" Side Arm - Round Pole Adapter * See Pg. 2 for suggested mounting options	LD = Light Detector/Photocell MD = Motion Sensor Detector	BRZ = Dark Bronze * Custom Colors Available



lightinnovations@work™

PRODUCT INFORMATION


Model No.	Description	Rated Watts	Input Watts	Initial Lumens	Universal Line Voltage (VAC)	Max Line Current (Amp)	THD	Power Factor	Weight
16080	16" SHOEBOX Fixture	80	82	6,400	120-277	0.69-0.30	<10%	0.98	25 lbs
16100	16" SHOEBOX Fixture	100	105	8,000	120-277	0.87-0.37	<10%	0.98	25 lbs
16120	16" SHOEBOX Fixture	120	125	9,600	120-277	1.05-0.45	<10%	0.98	26 lbs
16150	16" SHOEBOX Fixture	150	158	12,000	120-277	1.31-0.56	<10%	0.98	26 lbs
16200	16" SHOEBOX Fixture	200	210	16,000	120-277	1.75-0.75	<10%	0.98	26 lbs

SPECIFICATIONS

- Ballast Type Electronic
- Start Method InstantON
- Hot Re-start InstantON
- Universal Input Line Voltage 120-277 VAC
- Input Line Frequency 50/60 Hz
- Lamp Operating Frequency 250 kHz
- Ballast Off-State Draw 0 Watts
- Sound Rating Class A
- ANSI Surge Protection Class A
- Lamp / Ballast System Life 100,000 Hrs.
- Lumen Maintenance @75,000Hrs > 70%
- Color Temperature 5000°K
- Color Rendering Index (CRI) > 83
- Minimum Starting Temperature -20°F
- Maximum Starting Temperature 160°F
- Initial Lumens per Watt 80
- Shock / Vibration Resistant Yes
- Power Factor > 0.98
- Total Harmonic Distortion < 10%
- Inrush Current Peak < 10 Amp
- ETL Listed / UL Standard 1598 Yes
- FCC Compliance Part 18, Subp. C
- EPA Rating 0.78
- IP Rating IP65
- Warranty 10 Year

MOUNTING CONFIGURATION

Wall Mount
(WM6, WM12)



Arm Mount Single
(SA6, SA12)




Arm Mount 2 @ 180°
(SA6, SA12)




Arm Mount 2 @ 90°
(SA6, SA12)




Arm Mount 3 @ 120°
(SA6R, SA12R)



Arm Mount 3 @ 90°
(SA6, SA12)




Arm Mount 4 @ 90°
(SA6, SA12)




DRILLING PATTERNS


SA6, SA12, SA6R, SA12R

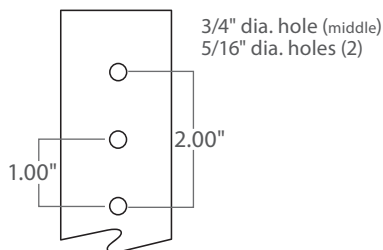

WM6, WM12

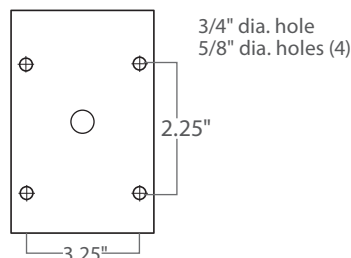

PHOTOMETRICS (See Complete IES File)



Type V Distribution

Neptun Light, Inc.
13950 Business Center Drive
Lake Forest, IL 60045
Fax: 847.735.8004

Neptun Light, Inc. reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program.
©2002-2012 Neptun Light, Inc. All rights reserved. Spec. Rev. 7-2012