

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

Finished in white, vaportite architectural-grade linear LED lighting with color temperature tuning illuminates the gym, warehouse and other middle to high ceiling spaces. Order this wet-location-rated bubble wrap linear vaportite LED light in lengths of either two feet or four feet.

FEATURES

Construction: Impact-resistant UV-protected polycarbonate housing with stainless steel clips, opal polycarbonate lens

Color Temperature Switch: Capable of delivering 3000K, 4000K & 5000K color temperatures that can be selected in the field

CRI: 83

Voltage: 100-277V 50/60Hz

Dimming: 0-10V Dimmable

Beam Angle: 120°


Life: 50,000 Hour

Operating Temperature: -40°F - 113°F

Power Factor: > 0.93

Listings: cULus, DLC, FCC, RoHS, IP65, Wet Location, LM-80, LM-79

Warranty: 5 years carefree for parts & components (labor not included)

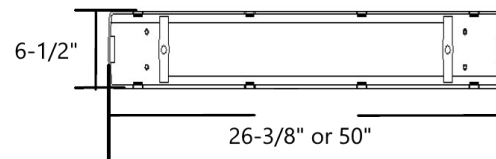

ORDERING INFORMATION Example: (11104-20-F)

Model	Size Wattage Lumens	Lens	Options
11104	20 2FT 20W 2600lms	^{Standard} F Frosted	EM Emergency
	40 4FT 40W 5200lms	C Clear	Back-Up Battery