

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Our Alcon 15211 is a specification grade sign light featuring a die-cast aluminum body suitable for outdoor wet applications. This fixture is ideal for outdoor wall wash, parking structures, commercial or retail outdoor areas, and for sign and walkway lighting.

FEATURES

Construction: Die-cast Aluminum, Removable 1/2" NPT Threaded Knuckles Included. Removable Half Shroud Included.

Voltage: 120~277V; 50/60Hz AC

THD: <20%

CRI: 70+

LED Life: 50,000 hrs



Operating Temp: -40°F to 104°F

Beam Angle: 90°

Cord Type: 3.2 SJTW 18/3 AWG cable

Warranty: 7 Years Carefree for Parts & Components (Labor Not Included)

Listings: DLC Rated, IP65, Wet Location Rated




Length	Watts	30K Lumen	50K Lumen
2FT	50W	6500LM	6700LM
4FT	120W	15300LM	15600LM



ORDERING INFORMATION Example: (15211-2-30-BK)


Model	Length	Color Temp	Finish
15211	2 2 Foot	30 3000K	BK Black
	4 4 Foot	50 5000K	WH ¹ White

¹ Only Available in 4 Foot Length

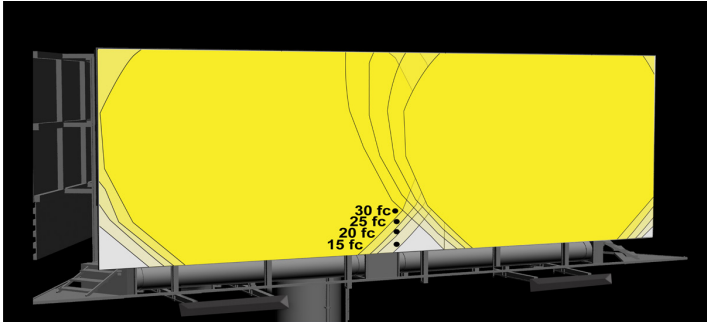


15211-2 (2 Foot)

Billboard Size: 5'x 17.5' Mounting Distance: 6'

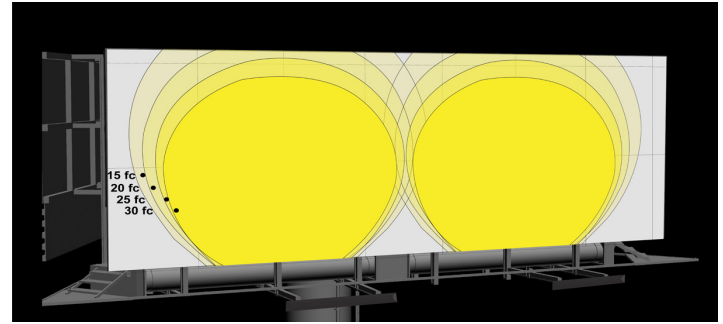


15211-4 (4 Foot)

Billboard Size: 10.5'x 36' Mounting Distance: 6'



BUG Rating: B3-U0-G0



BUG Rating: B4-U0-G1

2 Foot



Side View




Front View



Back View

4 Foot



Side View



Front View



Back View