



SHOP NOW >

FEATURES & SPECIFICATIONS

INTENDED USE

The **RFT 48 Inch Architectural LED Premier Full Body High Bay** is a high efficiency medium and low ceiling application ideal solution for warehouses, manufacturing plants, sports facilities, and retail spaces. The iLED Architectural LED Premier Full Body High Bay offers the flexibility to easily change wattage, lumens, and color temperature.

DETAILS

Model Number: 15214

4 Lamp - W 11.4" x **L** 48.1" x **H** 3.6Dp

6 Lamp - W 16.4" x **L** 48.1" x **H** 3.6Dp

Finish: White

Construction: Housing is 22 gauge prepainted steel with air vents to maximize lamp and ballast performance, reliability, and life.

ADDITIONAL FEATURES

Type: Full Body High Bay

Voltage: 120V - 277V Universal

Wattage: 72W (4x18W), 108W (6x18W)

Lumens: 8400lm, 12600lms

Light Color Temp: 3500K, 4000K, 5000K

Dimming:

Incandescent Dimming, 2-Wire




0-10V Dimming, 5-Wire

Support: Designed for Surface, Pendant, Chain, or Stem Mounting


Life: 50,000 hours

Warranty: 1 Year Carefree for Parts & Components (Labor Not Included)

Operating Temp: -20C to 50C
Lamp Included

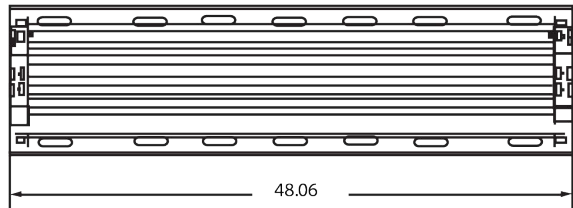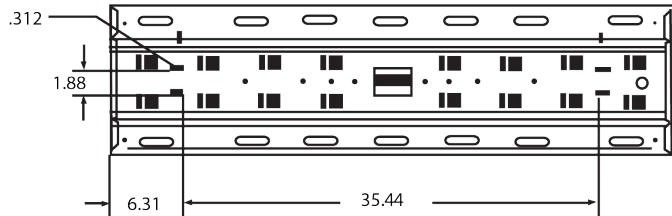

4 Lamp

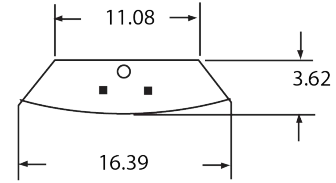

6 Lamp



Ordering Information:

Example: (15214-35K-72-2W-EM)

Model	Light Color Temp	Wattage & Lumens	Dimming
<input type="text" value="15214"/>	<input type="text" value="35K"/>	<input type="text" value="72"/>	<input type="text" value="(Blank)"/>
RFT (48")	3500K 4000K 5000K	72W (4x18W), 8400lms 108W (6x18W), 12600lms 144W (8x18W), 16800lms 180W (10x18W), 21000lms 216W (12x18W), 25200lms	Non-Dimming (Standard) Incandescent Dimming, 2-Wire 0-10V Dimming, 5-Wire
Options			
<input type="text" value="EM"/>			
Emergency Backup Battery			

¹Only available with 0-10V Dimming

Alcon Lighting 15214 RFT 48 Inch Architectural LED Premier Full Body High Bay