

a·light



e l e m e n t s



omni-direct



wall sconce

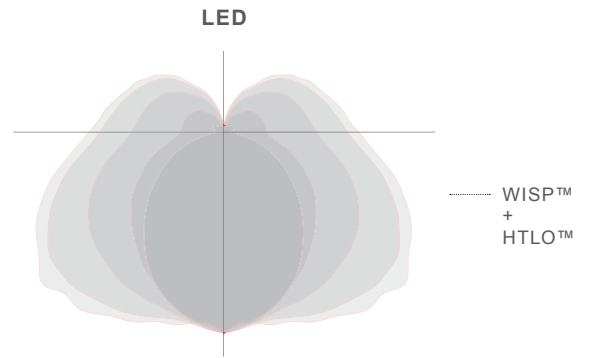

LED	1 board in cross	
per foot	watts/ft	lumens/ft
LS	5	600
LH	10	1200

Lumens at board at 4000k.
Consult IES files online for delivered lumens.
Specifications subject to change.

Available Light Platforms:



Available Mounting:



interior

Mounting:

Surface/Wall Mount: Fixture mounts direct to wall. Power connects inside fixture using BX or MX style wiring.

Lengths:

All length dimensions are nominal and used for general length identification purposes. Actual lengths may vary by several inches. Luminaires are individual fixtures and are not connectable. Mini-sconce available as LED only and size is actual at 9.625".

LED:

5yr warranty. >60,000hr LED life. Tested to LM-79 and LM-80. See wattage/lumen table for specifications per foot. All specifications are subject to change.

T5/T5HO:

Single lamp in cross section. Program start is factory standard.

T8:

Single lamp in cross section. Instant start is factory standard: choose low <0.8BF; standard 0.8-1.0BF; high >1.0BF. Specify if program start or custom ballast factor is required.

Construction:

60% recycled aluminum extruded housing. Precision milled endcaps. 180° omni-directional 3D lens.

Finish:

Electrostatically applied powder coat finish.

Listing:

UL/CUL. Damp Location.

Companion Luminaires:

O3 suspended/ceiling/wall

Legend:

1. Emergency ballast not applicable on lengths 3ft or less.
2. Dimming and emergency not applicable in mini sconce. Mini sconce available only with LED and only in 120v.
3. Not available in mini sconce.

Series: O2

Dimension: _____

mini 9.625" ²	B9
nominal 2' ¹	2
nominal 3' ¹	3
nominal 4' ¹	4

Lamping: _____

LED standard output	LS
LED high output	LH
T5 (1)	S
T5HO (1)	H
T8 (1) low output	T8L
T8 (1) standard output	T8S
T8 (1) high output	T8H

LED Temp (if applicable): _____

3000k	30
3500k	35
4000k	40

Voltage: _____

universal 120V - 277V ³	U
120V	1
277V ³	2
347V ³	3

Optics: _____

WISP™ lens	S
WISP™ + HTLO™ lens	SH

Mounting: _____

surface mount	F
---------------	----------

Finish: _____

a-lightanium™	T
satin white	W
satin black	B
textured eggshell white	E
other - specify RAL#	O

Options: _____

dimming - specify manufacturer, model/series and voltage ²	D
emergency - specify model/series or lumens ¹	E
external fusing	F
new york city code	N

wall