



Project \_\_\_\_\_



Type \_\_\_\_\_

Notes \_\_\_\_\_

**PERFORMANCE PER LINEAR FOOT AT 3500K**

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY
500 lm/ft	5.27 W/ft	102 lm/W
600 lm/ft	5.45 W/ft	111 lm/W
800 lm/ft	7.17 W/ft	111 lm/W
1000 lm/ft	8.95 W/ft	112 lm/W

Please consult factory for custom lumen output and wattage.



\*Check the latest update on the DLC website for complete information. Not all versions may be DLC qualified.



See page 2 for DLC Approved Options

**Ordering Guide**

PRODUCT ID	NOM.LUMENS/FT	CRI	COLOUR TEMP.	S SHIELDING	LENGTH/FT	FINISH	VOLTAGE
<b>PRLED</b> Round Pendant LED	<b>500</b> 500 lm/ft - Minimum	<b>80</b> 80 CRI	<b>27</b> 2700 K	<b>S</b> satin lens	<b>2</b> 2'	<b>AP</b> aluminum paint	<b>120</b> 120 V
<b>PWLED</b> Wedge Pendant LED	<b>1000</b> 1000 lm/ft - Maximum	<b>90</b> 90 CRI	<b>30</b> 3000 K		<b>4</b> 4'	<b>W</b> white	<b>277</b> 277 V
			<b>35</b> 3500 K		<b>6</b> 6'	<b>BLK</b> black	<b>347</b> 347 V
			<b>40</b> 4000 K		<b>8</b> 8'	<b>C</b> custom	<b>UNV</b> universal
					<b>12</b> 12'		
					<b>S#</b> system run		
Outputs between listed min and max are available. Consult factory for outputs outside of the listed range.			<a href="#">Consult Axitune technical sheet for more information of color technology.</a>				

DRIVER	CIRCUITS	MOUNTING/SUSPENSION	BATTERY (OPTIONAL)
<b>DP</b> dimming (0-10V) 1%	<b>1</b> 1 circuit	<b>CA(#)</b> drywall+cable length (36" std.) <sup>(4)</sup>	<b>B#</b> battery pack 4' sections <sup>(5)</sup>
<b>LT</b> Lutron <sup>(1)</sup>	<b>2</b> 2 circuits	<b>CT9(#)</b> TB/TG 9/16+cable length (36" std.) <sup>(4)</sup>	
<b>BI</b> bi-level dimming	<b>+E(#)</b> emergency circuit <sup>(3)</sup>	<b>CT15(#)</b> TB/TG15/16+cable length (36" std.) <sup>(4)</sup>	
<b>O</b> other <sup>(2)</sup>	<b>+NL(#)</b> night light circuit <sup>(3)</sup>	<b>CTS(#)</b> ST+cable length (36" std.) <sup>(4)</sup>	
	<b>+GTD(#)</b> generator transfer device <sup>(3)</sup>	<b>SA(#)</b> drywall+stem length >48" (18" std.) <sup>(4)</sup>	
(1) Specify system (2) Please consult factory; see page 2 <a href="#">Consult Axitune spec sheet for Axis color driver options</a>	(3) Specify quantity	(4) Specify quantity	(5) Specify quantity Not available with 347V Please consult factory


IC CONTROLS (OPTIONAL)	OTHER (OPTIONAL)	CUSTOM (OPTIONAL)
<b>DS#</b> daylight sensor	<b>F</b> fuse	<b>C</b> custom
<b>OS#</b> occupancy sensor		
<b>DOS#</b> daylight & occupancy sensor		
<b>EN#</b> Enlighted integral <sup>(6)</sup>		
<b>ENR#</b> Enlighted remote <sup>(7)</sup>		
<b>WC#</b> wireless control dimming		
(6) For flush option only; Please consult factory (7) Please consult factory Specify quantity. Requires 8" blank See integrated controls guide for more details.	Requires 120V or 277V	Please specify

● LIGHT DISTRIBUTION



semi-direct


● MOUNTING OPTIONS




**CT** TILE CEILING - ON GRID

Mounting options are also available for slope ceiling and seismic bracing.

**i** Installation sheets for all mounting options are available at: [www.axislighting.com](http://www.axislighting.com)

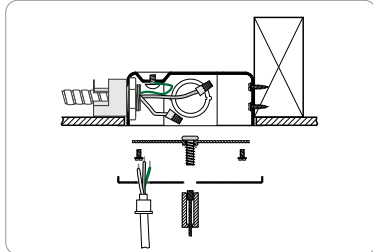

**CA** DRYWALL CEILING

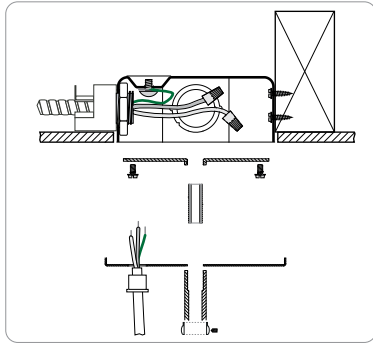


**SA** STEM MOUNT IN DRYWALL CEILING

● FINISH

Powder coated and custom finishes are also available.


● APPROVALS

Certified to UL and CUL standards  Suitable for damp locations.

● LED SYSTEM

- CRI** Minimum 80 or 90 color rendering index.
- CCT** Choice of 2700K, 3000K, 3500K and 4000K color temperature with a great color consistency (within 3-step MacAdam ellipse). Both within fixture and fixture to fixture.
- LED life** Minimum 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.
- Thermal Management** Aluminum housing acting as the heat sink to maximize life.

● OPTICS



S satin lens

**SATIN LENS**

PMMA satin finish (0.060" nominal) 68% trans.

● SPECIFICATIONS

**CONSTRUCTION**

- Housing** Extruded aluminium (0.070" nominal) up tp 70% recycled content
- End Cap** Die cast zinc (0.080" nominal)
- Joiners** Die cast zinc (0.070" nominal)
- Interior Brackets** Die formed sheet steel (20 gauge)
- Reflectors** Die formed sheet steel (18 gauge)
- Lens joiners** Die cast zinc (0.070" nominal)
- Satin lens** PMMA satin finish (0.060" nominal) 68% trans.

**ELECTRICAL**

- Input Voltage** 120V, 277V, 347V, UNV.
- Driver** Dimming, HiLume, EcoSystem, DALI,
- CRI** Minimum 80 or 90 color rendering index
- CCT** Choice of 2700K, 3000K, 3500K and 4000K color temperature with a great color consistency (within 3.5-step MacAdam ellipse).
- LED life** Minimum 50,000h with 70% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.
- Thermal management** Aluminium housing acting as the heat sink to maximize life.
- Emergency** Emergency battery pack or emergency circuit optional.

● SYSTEMS (S#)

Runs of PRIME LED that are greater than 12ft in length are designated as systems (S#). This means that the run is comprised of a combination of sections to be assembled on site using our joining system. For more information on systems and joining, please refer to the PRIME LED installation sheets available for download at [www.axislighting.com](http://www.axislighting.com)

● OTHER MOUNTING OPTIONS

PRIME LED is also available in wall and surface mounted options.

**i** Specification sheets for all mounting options are available for download at [www.axislighting.com](http://www.axislighting.com)

● WEIGHT

- Pendant LED 4 ft** 8 lbs / 3.9 Kg
- Pendant LED 8 ft** 16 lbs / 7.7 Kg
- Pendant LED 12 ft** 25 lbs / 11.6 Kg

● DLC Approved Options




\*Check the latest update on the DLC website for complete information. Not all versions may be DLC qualified.


OUTPUT	CRI	COLOR TEMP.	SHIELDING	LENGTH
500 lm/ft	80	3000 K	S	2'
600 lm/ft		3500 K		4'
800 lm/ft		4000 K		8'
1000 lm/ft				12'

● PHOTOMETRIC DATA

600 lm/ft



PHOTOMETRIC CURVE

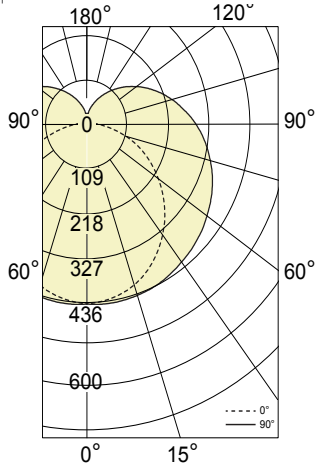

Luminaire Lumens: 600 lm/ft  
Input Watts: 5.45 W/ft  
Efficacy: 111 lm/W

IES FILE: PRLED-B3-MF-600-80-35-4.IES  
TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45.0	67.5	90
0	432	432	432	432	432
5	428	431	430	432	434
15	412	418	422	428	432
25	381	390	404	419	426
35	337	351	379	403	414
45	283	304	348	385	399
55	221	253	313	362	380
65	154	200	276	336	357
75	86	149	239	305	328
85	25	107	204	272	296
90	2	90	186	254	277
95	3	77	169	236	259
105	7	59	140	200	221
115	12	49	114	166	184
125	15	42	92	133	148
135	17	34	72	103	114
145	18	27	50	76	84
155	21	23	35	49	58
165	24	22	25	28	37
175	26	26	24	20	12
180	23	23	23	23	23


ZONAL LUMENS

Zone	Lumens
0	
0-10	41
10-20	119
20-30	186
30-40	236
40-50	266
50-60	275
60-70	265
70-80	238
80-90	203
90-100	167
100-110	136
110-120	106
120-130	78
130-140	53
140-150	32
150-160	17
160-170	8
170-180	2


LUMINANCE DATA (cd/m<sup>2</sup>)

Vertical Angle	Horizontal Angles		
	0	45	90
45	4385	4303	4597
55	4182	4362	4833
65	3894	4564	5245
75	3434	5048	5916
85	2556	6224	7197

500 lm/ft



PHOTOMETRIC CURVE

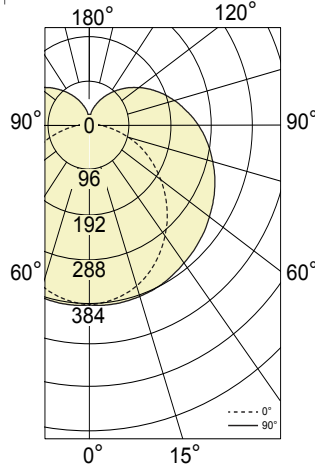

Luminaire Lumens: 500 lm/ft  
Input Watts: 5.27 W/ft  
Efficacy: 102 lm/W

IES FILE: PRLED-B3-MF-500-80-30-4.IES  
TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45.0	67.5	90
0	382	382	382	382	382
5	379	381	380	382	384
15	365	370	373	379	382
25	337	345	357	371	377
35	298	311	335	357	366
45	250	269	308	341	353
55	196	224	277	320	336
65	136	177	244	297	316
75	76	132	211	270	290
85	22	95	180	241	262
90	2	80	165	225	245
95	3	68	150	209	229
105	6	52	124	177	196
115	11	43	101	147	163
125	13	37	81	118	131
135	15	30	64	91	101
145	16	24	44	67	74
155	19	20	31	43	51
165	21	19	22	25	33
175	23	23	21	18	11
180	20	20	20	20	20

ZONAL LUMENS

Zone	Lumens
0	
0-10	36
10-20	106
20-30	165
30-40	209
40-50	235
50-60	243
60-70	234
70-80	211
80-90	179
90-100	148
100-110	120
110-120	94
120-130	69
130-140	47
140-150	29
150-160	15
160-170	7
170-180	2

LUMINANCE DATA (cd/m<sup>2</sup>)

Vertical Angle	Horizontal Angles		
	0	45	90
45	3879	3807	4067
55	3700	3859	4276
65	3445	4038	4640
75	3038	4466	5234
85	2261	5506	6367

**lighting facts**  
A Program of the U.S. DOE

Light Output (Lumens) 2151  
Watts 21.08  
Lumens per Watt (Efficacy) 102

Color Accuracy  
Color Rendering Index (CRI) 83

Light Color  
Correlated Color Temperature (CCT) 3007 (Bright White)

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.


Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: AEYL-XWVW48 (10/20/2015)  
Model Number: PRLED-B3-500-30-ST-4-W-120-D-1-(N/A)-(NONE)-(NONE)-(NONE)-(NONE)  
Type: Luminaire - Linear


**i** All IES files are available for download at: [www.axislighting.com](http://www.axislighting.com)

● **PHOTOMETRIC DATA**

800 lm/ft



**PHOTOMETRIC CURVE**

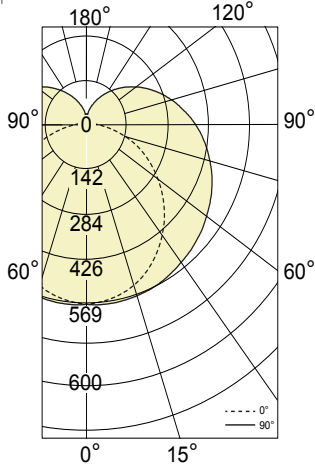

**Luminaire Lumens: 800 lm/ft**  
**Input Watts: 7.17 W/ft**  
**Efficacy: 111 lm/W**

IES FILE: PRLED-B3-MF-800-80-35-4.IES  
TESTED ACCORDING TO IES LM-79-2008

**CANDELA DISTRIBUTION**

Vertical Angle	Horizontal Angles				
	0	22.5	45.0	67.5	90
0	432	432	432	432	432
5	428	431	430	432	434
15	412	418	422	428	432
25	381	390	404	419	426
35	337	351	379	403	414
45	283	304	348	385	399
55	221	253	313	362	380
65	154	200	276	336	357
75	86	149	239	305	328
85	25	107	204	272	296
90	2	90	186	254	277
95	3	77	169	236	259
105	7	59	140	200	221
115	12	49	114	166	184
125	15	42	92	133	148
135	17	34	72	103	114
145	18	27	50	76	84
155	21	23	35	49	58
165	24	22	25	28	37
175	26	26	24	20	12
180	23	23	23	23	23


**ZONAL LUMENS**

Zone	Lumens
0	
0-10	54
10-20	157
20-30	244
30-40	310
40-50	349
50-60	360
60-70	347
70-80	312
80-90	265
90-100	219
100-110	178
110-120	139
120-130	103
130-140	70
140-150	42
150-160	23
160-170	10
170-180	3


**LUMINANCE DATA (cd/m<sup>2</sup>)**

Vertical Angle	Horizontal Angles		
	0	45	90
45	4385	4303	4597
55	4182	4362	4833
65	3894	4564	5245
75	3434	5048	5916
85	2556	6224	7197

1000 lm/ft



**PHOTOMETRIC CURVE**

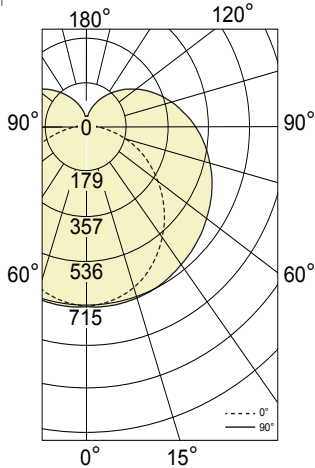

**Luminaire Lumens: 1000 lm/ft**  
**Input Watts: 8.95 W/ft**  
**Efficacy: 112 lm/W**

IES FILE: PRLED-B3-MF-1000-80-30-4.IES  
TESTED ACCORDING TO IES LM-79-2008

**CANDELA DISTRIBUTION**

Vertical Angle	Horizontal Angles				
	0	22.5	45.0	67.5	90
0	382	382	382	382	382
5	379	381	380	382	384
15	365	370	373	379	382
25	337	345	357	371	377
35	298	311	335	357	366
45	250	269	308	341	353
55	196	224	277	320	336
65	136	177	244	297	316
75	76	132	211	270	290
85	22	95	180	241	262
90	2	80	165	225	245
95	3	68	150	209	229
105	6	52	124	177	196
115	11	43	101	147	163
125	13	37	81	118	131
135	15	30	64	91	101
145	16	24	44	67	74
155	19	20	31	43	51
165	21	19	22	25	33
175	23	23	21	18	11
180	20	20	20	20	20

**ZONAL LUMENS**

Zone	Lumens
0	
0-10	68
10-20	197
20-30	307
30-40	389
40-50	439
50-60	453
60-70	436
70-80	392
80-90	334
90-100	276
100-110	224
110-120	175
120-130	129
130-140	88
140-150	53
150-160	28
160-170	13
170-180	4

**LUMINANCE DATA (cd/m<sup>2</sup>)**

Vertical Angle	Horizontal Angles		
	0	45	90
45	3879	3807	4067
55	3700	3859	4276
65	3445	4038	4640
75	3038	4466	5234
85	2261	5506	6367

**LED lighting facts®**  
A Program of the U.S. DOE

Light Output (Lumens) 2151  
Watts 21.08  
Lumens per Watt (Efficacy) 102

Color Accuracy  
Color Rendering Index (CRI) 83

Light Color  
Correlated Color Temperature (CCT) 3007 (Bright White)

2700K 3000K 4500K 6500K

Warm White | Bright White | Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: AEYL-XWWW46 (10/20/2015)  
Model Number: PRLED-B3-500-30-ST-4-W-120-D-1-(N/A)-(NONE)-(NONE)-(NONE)-(NONE)  
Type: Luminaire - Linear

**i** All IES files are available for download at: [www.axislighting.com](http://www.axislighting.com)