


4-1/4" square corner mount LED fixture for outdoor applications

Project: _____ Type: _____



SECTION

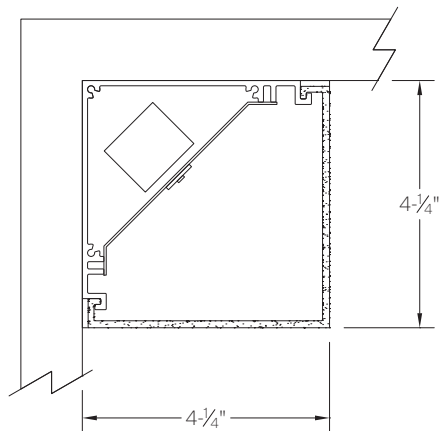

FEATURES

The BSW755 is a corner mount, linear LED luminaire well suited for outdoor lighting. The 4-1/4" x 4-1/4" extruded aluminum housing tucks into architectural junctures and fitted with a two-sided, frosted acrylic lens. When installed, virtually no fixture housing is visible, leaving the evenly illuminated lens to make a strong visual statement.

SPECIFICATIONS

Fixture constructed of an extruded aluminum housing, frosted, extruded acrylic lens and sheet aluminum end caps

Standard finishes as shown below

Available in nominal lengths of 2'-8' single fixtures and continuous runs

Housing provided with a Ø7/8 hole for back feeding

Standard integral 120-277V wet location driver offered with 0-10V dimming or non-dim

Standard outputs are 445, 890 and 1145 lumens per foot

LEDs available in 2700K, 3000K, 3500K, and 4000K, within a 3 step MacAdam ellipse, all with 80+ CRI typical

Life: 50,000 hours L₇₀

Limited five year warranty

UL and C-UL listed for wet locations

[GET A QUOTE >](#)

PERFORMANCE

NOMINAL LENGTH	OUTPUT	LUMENS/ft.	WATTS/ft.	LUMINAIRE LUMENS	EFFICACY (LPW)
4'	L: low	445	4.0	1774	111
	R: regular	890	8.0	3552	111
	H: high	1145	10.3	4572	111

Note: All data reflects fixtures with 3500K LEDs

BSW755 -

NOMINAL FIXTURE LENGTH* 2: 24-5/8" 3: 36-5/8" 4: 48-5/8" 5: 60-5/8" 6: 72-5/8" 7: 84-5/8" 8: 96-5/8"	CORRELATED COLOR TEMPERATURE 27: 2700K-80+ CRI 30: 3000K-80+ CRI 35: 3500K-80+ CRI 40: 4000K-80+ CRI	DRIVER IN: non-dimming ID: 0-10V dimming, 5%	LIGHT OUTPUT L: low - 445 R: regular - 890 H: high - 1145	MOUNT SM: surface mount	RUN CONFIGURATION SN: single ST: starter AD: adder TR: terminator	FINISH AW: architectural white (semi-matte) WH: white (semi-gloss) BL: black (semi-matte) MB: matte black ESS: environmental satin silver BZ: bronze PR: primer CF: consult factory for custom finish
--	---	---	---	-----------------------------------	--	--




* Actual dimension dependent on mounting option and run configuration

MOUNTING

ORDERING CODE

DESCRIPTION



SM

SURFACE MOUNT

- Use appropriate fastener through Ø3/16" holes in housing
- Power entry through Ø7/8 hole on the back at an end

EPA CALCULATIONS

LENGTH ORDERING CODE	EPA
2	1.39 ft ²
3	2.06 ft ²
4	2.75 ft ²
5	3.41 ft ²
6	4.08 ft ²
7	4.75 ft ²
8	5.42 ft ²