

SPECIFICATION SHEET

JOB NAME: _____
 LOCATION: _____
 QUOTE/REF#: _____






FEATURES


- 120V AC NO POWER SUPPLY REQUIRED
- Continuous run up to 150 Feet
- Suitable for indoor or outdoor use
- Wet and dry locations
- High 90+ CRI (Color Rendering Index)
- Superior Light Quality
- Custom length available every 4"
- MacAdam Ellipse 2-Step Binning
- Line Voltage Linear Light
- ETL listed

SPECIFICATIONS

INPUT VOLTAGE	120V AC
POWER CONSUMPTION	4 Watts
COLOR TEMPERATURES	27K / 30K / 40K
DIODES PER FT	20
MAX RUN LENGTH	150
DIMMABLE	YES
BEAM ANGLE	120°
CUTTING POINTS	every 4"
FIELD CUTTABLE	YES
BINNING	MacAdam Ellipse 2-Step
DIODE SPACING	0.68"
IP RATING	IP65 (dry / wet)
OPERATING TEMP	-22°F to 122°F
AMBIENT TEMP	-4°F to 104°F
LUMEN MAINTENANCE	50,000 hrs.

	COLOR TEMP	CRI	LUMENS/FT
	2700K	90+	308
	3000K	90+	374
	4000K	90+	383

DIMENSIONS

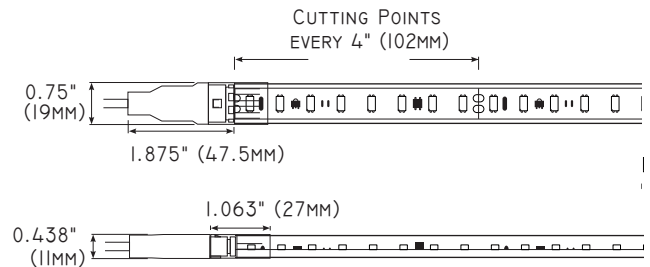


ORDERING GUIDE

MODEL	COLOR TEMPERATURE	LENGTH	VOLTAGE
LSG-40	27K - 2700K 30K - 3000K 40K - 4000K	50 - 50ft. 150 - 150ft.	120 - 120V

COMPATIBLE ACCESSORIES

ALUMINUM CHANNEL

LSG-AC48 48" Aluminum Channel

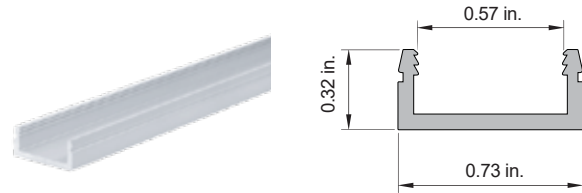

ALUMINUM CHANNEL

LSG-AC2000FR-48 48" Aluminum Channel


LSG-AC2000FR-96 96" Aluminum Channel

LSG-AC2000FR-EC End Cap (sold separately)

LSG-AC2000FR-MC Mounting Clip

*4pcs included with every 96"

*2pcs included with every 48"

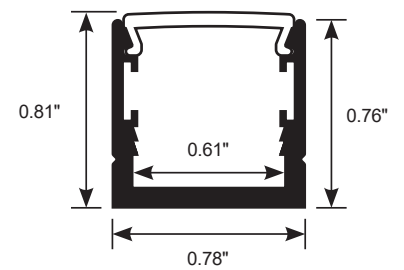

HARDWIRE POWER FEED CABLE


LSG-HWC36 36" Hardwire Power Feed Cable

LSG-HWC72 72" Hardwire Power Feed Cable



POWER CABLE

LSG-PCA72 72" Power Feed Cable



LINK EXTENSION CABLE

LSG-LNK6 6" Link Cable

LSG-LNK12 12" Link Cable

LSG-LNK24 24" Link Cable

