



Date:	Approved:
Type:	
Fixture:	
Project:	

FCWSX6375 / FCWSX6376

Die-Cast Aluminum Interior / Exterior,
Up Light and Up / Down Wall Light.



ORDERING



50 or Less / ships in 2 weeks *

EXAMPLE: FCWSX6375-120V-4K-BK-F

SERIES	VOLTAGE	SOURCE/TEMPERATURE/LAMP	FINISH	6375 OPTICS	6376 OPTICS	ACCESSORIES
FCWSX6375 Down	120V	HID 39W MH G12	BK Black	D2	D1	LD LED Dimming (0-10V)
FCWSX6376 Up/Dwn	277V	70W MH G12	BZ Bronze	D2A	D3	EC E-Coat
	347V △	150W MH G12 (remote)	SL Silver		D4	EMR Emergency Backup, Remote (<i>LED only</i>)
		LED 3K 350 Lumens (Up or Down)	WH White		D6	
		4K 680 Lumens (Up & Down)	CC Custom Color		D7	
					D8	

△contact factory

SPECIFICATION

MOUNTING

- Mounts directly to standard junction box. In masonry, use four (4) 0.25" x 0.75" screws with lead anchors (*box and fasteners by others*).

CONSTRUCTION

- Marine grade, corrosion resistant, heavy walled, high pressure die-cast aluminum.
- Lens is clear, tempered glass. Extruded silicone to provide maximum protection against contaminants.
- Captive and recessed stainless steel, tamper resistant hex socket screws.

LED

- Lumens stated are the minimum delivered out of the luminaire. LED lifetime is greater than or equal to 70,000 hours with the lumen depreciation greater than L70. All of our luminaires are tested to LM 80 with a CRI ≥ 80 and color consistency of step 4 MacAdam Ellipse. Integral power supply standard. Input voltage 120V or 277V.

FINISH

- Six stage chemical pre-treatment process that includes iron phosphate, to prepare the substrate for a UV stable, super durable standard polyester powder coat.
- Optional e-coat process is added to the standard finish including zinc phosphate for a 5 year limited warranty.

ELECTRICAL

- Socket** HID: G12 base porcelain socket.
- Ballast** HID: Remote electronic ballast for 150W MH G12. Ballast has a manufacturer issued 5 year warranty. Electronic universal voltage 120V or 277V is standard. Please consult factory for other voltage options.

LISTING

- UL & cUL listed for wet locations. IP65 rating.

* Terms & Conditions for our Go Green Speed, quick ship program are located on our website: fclighting.com

FC Lighting, Inc. reserves the right to change details or specifications without notice. Product use certifies agreement to FC Lighting's terms and conditions.

PHOTOMETRY

DISTRIBUTION OPTIONS




HID - Flood 50°, Spot 8°

LED - Flood 120°, Spot 15°

DIMENSIONS

FCWSX6375

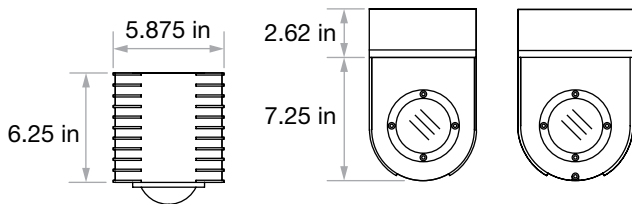

FCWSX6376

