

## FCWSX6375-6 (wall mounting) - INSTALLATION INSTRUCTIONS

CAUTION: BEFORE CONNECTING THE FIXTURE TO A POWER SUPPLY, MAKE SURE THE POWER IS SWITCHED OFF.



corporate  
t 800.900.1730  
f 630.889.8106  
3609 Swenson Ave.  
St. Charles, IL 60174

### DETAILED ILLUSTRATION

#### GENERAL:

1. Before starting the installation, make sure all electricity has been turned off and electrical breaker has been locked out and tagged out.
2. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
3. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code.

**NOTE:** The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur.

#### INSTALLATION INSTRUCTIONS:

##### Fixture with Ballast Box (required with 39W/70W MH G12 and LED Up/Down)


**Note:** Fixture ships assembled, first disassemble pieces front to back to mount fixture.

Remove Fixture Housing with (2) Set Screws. Next remove 'L' Lamp Housing Back Plate and Housing Gasket with (2) Screws, then remove Ballast Box Cover and Ballast Box Gasket with (6) Screws. Finally, remove Ballast Bracket Assembly from Ballast Box.

1. Run power supply wire out back of Ballast Box. Make power supply connections at J-Box. Make certain the power is off and remains off until all wiring is completed.
2. Secure Ballast Box to J-Box, on desired wall, with inside arrow pointing up and silicone caulk edge between fixture and mounting surface. Fixture mounts to a standard octagonal J-Box.
3. Reattach Ballast Bracket into Ballast Box.
4. Run balance of wires through hole in Ballast Box Gasket and Ballast Box Cover. Attach cover with (6) provided screws so wire way hole is on right hand side as shown in front view. Make sure arrow on ballast box is pointing up.
5. Feed remaining wires through right side hole in Housing Gasket and hole of 'L' Lamp Housing Back Plate, then reattach the Back Plate (with lamp components) to the Ballast Box Cover using (2) provided Screws. Complete any remaining wiring to lamp components.
6. Attach Fixture Housing to Lamp Housing Back Plate using (2) Set Screws.

##### Fixture (no Ballast Box)

1. Remove Fixture Housing by loosening (2) Set Screws.
2. Complete fixture / power supply wiring at J-Box.
3. Secure 'L' Lamp Housing Back Plate to J-Box. Then silicone caulk edge between fixture and mounting surface. Fixture mounts to a standard octagonal J-Box.
4. Complete any remaining wiring for lamping components.
5. Reattach Fixture Housing to Back Plate using (2) Set Screws.

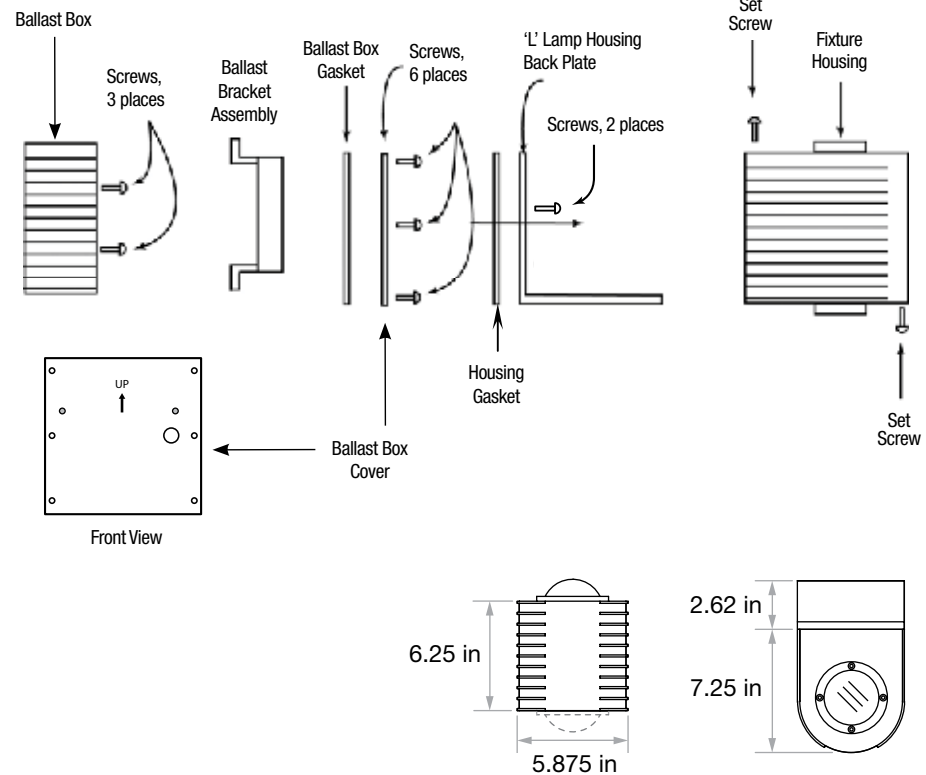

CONFIDENTIAL

THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF FC LIGHTING, INC. ANY UNAUTHORIZED TRANSFER, USE OR REPRODUCTION IS STRICTLY PROHIBITED.

Rev. 513

©2013 FC LIGHTING, INC.