

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Available with BIOS® SkyBlue® technology to support proper daytime circadian stimulus
- Backlit curved lens provides uniform illumination for visual comfort
- Distinct curved deep center detail creates a highly aesthetic presence
- Available with decorative inserts to customize center lens
- Maximize energy savings with efficacies as high as 118 lm/w
- Hinged door frame with optical assembly swings down to allow easy access from room side of fixture
- Optional gasketed acrylic lens helps protect against contaminants
- Made Right Here® in the USA

SPECIFICATIONS

- HOUSING**— Precision die-formed 22-gauge C.R.S.
- DOOR FRAME**— Hinged, flat, extruded aluminum door frame with optical assembly.
- SHIELDING**— Diffuse polycarbonate lens and acrylic center standard.
- FINISH**— 95% reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL**— High quality mid-power LED boards. L70 >60,000 hours per IES TM-21.
- MOUNTING**— Designed for NEMA Type “G” 1” grid ceiling standard. For NEMA Type “NFG” and “SG” 9/16” grid installations, specify EQCLIPS option. NEMA Type “F” available, see options.
- LISTINGS**—
 - cETLus conforms to UL STD 1598 and UL STD 8750.
 - Certified to CAN/CSA STD C22.2 No. 250.0.
 - Suitable for damp locations.
 - IC-rated for direct contact with insulation.
 - DesignLights Consortium qualified product. Not all versions of this product may be DLC qualified, see the DLC Qualified Products List at www.designlights.org/QPL.
 - City of Chicago Environmental Air approved when specified with CP option.
- WARRANTY**— 5-year limited warranty, see hew.com/warranty.

ORDERING EXAMPLE: AT2 - 2 4 - L70/835 - D - OPTIONS - DIM - UNV

ORDERING INFO

SERIES	WIDTH	LENGTH	LUMENS ^[1]	CRI	CCT	SHIELDING
AT2	2 2'	2 2'	2x2	8 80	27 2700K	D Diffuse matte acrylic center
		4 4'	L30 3,000lm	9 90 ^[2]	30 3000K	P Perforated center ^[3]
			L40 4,000lm		35 3500K	
			L50 5,000lm		40 4000K	
			2x4		50 5000K	
			L40 4,000lm			DECORATIVE INSERTS ^[4]
			L55 5,500lm			D11 Triple wave
			L70 7,000lm			D12 Brushed metal
			L100 10,000lm			D13 Elliptical Perf
						D14 Circles
					D15 Stripes	
					D16 Tri-Pyramid	

OPTIONS

- EM/7W** 7-watt emergency LED battery ^[6]
- EM/10W** 10-watt emergency LED battery ^[7]
- EM/12W** 12-watt emergency LED battery ^[8]
- EQCLIPS (L__)** Earthquake clips ^[9]
Additional lower lumen packages available. ^[10]
Example: 5,000 nominal lumens = AT2-24-L55/835-D-(L50).
- SS** Sani-shield acrylic cover with double gasket. ^[11]
- SS/PC** Sani-shield polycarbonate cover with double gasket. ^[12]
- AMW** Anti-microbial white finish
- NEMA F** NEMA Type “F” flange kit ^[13]
- CP** Chicago Plenum (CCEA)

CONTROL ^[5]

- DIM** Dimming driver
- DRV** Non-dimming driver
- VDO/DSR** Lutron Vive integral fixture control, RF with daylight and occupancy sensor (DFCSJ-OEM-OCC) and sensor-ready driver ^[14]
- VRF/DSR** Lutron Vive integral fixture control, RF only (DFCSJ-OEM-RF) and sensor-ready driver

VOLTAGE

- 120** 120V
- 277** 277V
- UNV** 120-277V
- 347** 347V ^[15]

NOTES

- Lumen output based on 3500 CCT. Actual lumens may vary +/-5%, see page 2 for FIXTURE PERFORMANCE DATA. Additional lumen package available, see options.
- Extended lead times may apply. Consult factory for availability.
- Decreases lumen output by 15%
- Only available with D shielding option. See page 3 for DIFFUSE CENTER DECORATIVE INSERT DETAILS. See page 3 for ADDITIONAL CONTROL OPTIONS.
- See page 3 for ADDITIONAL CONTROL OPTIONS.
- 120V-277V only.
- 120V-277V only.
- 120V-277V only.
- 4 per fixture. Optional for 1” grid installations. Required for 9/16” grid mounting. Not available with NEMA F Option.
- Specify in increments of 100 nominal lumens. Option must be specified with next higher lumen package.
- Reduces lumen output by 10%.
- Reduces lumen output by 10%.
- Factory-installed. See page 3 for NEMA TYPE “F” INSTALLATION.
- Not available with SS Option.
- Not available with EM drivers.



Available with BIOS® consult factory



AT2 LED Architectural Troffer—Curved Deep Center

FIXTURE PERFORMANCE DATA

	LED PACKAGE	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
2x2	L30	3119	29.5	105.7
	L40	4243	37.2	114.2
	L50	5208	48.3	107.8
2x4	L40	4117	34.2	120.5
	L55	5633	48.0	117.3
	L70	7143	63.3	112.8
	L100	10328	86.9	118.7


MULTIPLIER TABLE

COLOR TEMPERATURE	
CCT	CONVERSION FACTOR
2700K	0.97
3000K	0.99
3500K	1.00
4000K	1.03
5000K	1.06
2700K	0.80
3000K	0.82
3500K	0.83
4000K	0.86
5000K	0.89

- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Wattage shown is average for 120V through 277V input.
- Results based on 3500K, 80 CRI, actual lumens may vary +/-5%
- Use multiplier table to calculate additional options.

PHOTOMETRY


AT2-22-L40/835-D-DIM-UNV Total Luminaire Output: 4117 lumens; 34 Watts | Efficacy: 120 lm/W | 82 CRI; 3500K CCT



CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
		0°	45°	90°	
	0	1729	1729	1729	
	5	1729	1729	1731	164
	15	1618	1636	1656	460
	25	1398	1439	1473	663
	35	1171	1225	1268	757
	45	888	945	984	723
	55	620	669	694	597
	65	397	440	461	431
	75	201	241	253	249
	85	52	65	60	72
	90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1287	31
	0 - 40	2044	50
	0 - 60	3364	82
	0 - 90	4117	100
	0 - 180	4117	100

AT2-24-L70/835-D-DIM-UNV Total Luminaire Output: 7143 lumens; 63 Watts | Efficacy: 113 lm/W | 82 CRI; 3500K CCT





CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
		0°	45°	90°	
	0	3000	3000	3000	
	5	3000	3000	3004	284
	15	2807	2839	2873	798
	25	2425	2496	2556	1151
	35	2032	2126	2200	1314
	45	1540	1639	1708	1254
	55	1076	1161	1205	1036
	65	690	763	800	749
	75	349	418	439	432
	85	90	113	103	126
	90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	2233	31
	0 - 40	3547	50
	0 - 60	5837	82
	0 - 90	7143	100
	0 - 180	7143	100


FIXTURE DETAILS

BACKVIEW

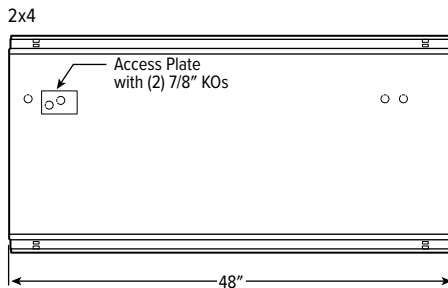

AT2 LED Architectural Troffer—Curved Deep Center

NEMA TYPE “F” INSTALLATION

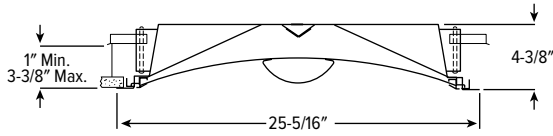

Note: Maximum recommended ceiling opening is 24-3/8" x 24-3/8" for 2'x2' and 24-3/8"x 48-3/8" for 2'x4'. For continuous row mounting, add 49-5/16" for each additional fixture to obtain ceiling opening. 1-5/16" between end plates.

ADDITIONAL CONTROL OPTIONS

Note: Lumen restrictions apply, consult product builder at hew.com/product-builder.

CATALOG NUMBER	DESCRIPTION
DRV	Driver prewired for non-dimming applications
DIM	Dimming driver prewired for 0-10V low voltage applications
DIM1	1% dimming driver prewired for 0-10V low voltage applications
DIM LINE	Line voltage dimming driver (TRIAC and ELV compatible, 120V only)
DIM TRC	Line voltage dimming driver (TRIAC compatible, 120V or 277V only)
DSR	Sensor-ready driver
SD40	40% step-dimming driver
SD50	50% step-dimming driver
DALI	DALI dimming driver
LTE LINE	Lutron Hi-lume 1% 2-wire dimming driver forward phase line voltage controls (120V only)
LDE1	Lutron Hi-lume 1% EcoSystem dimming LED driver
LDE5	Lutron 5-Series 5% EcoSystem dimming LED driver
VDO/DSR	Lutron Vive integral fixture control, RF with daylight and occupancy sensor (DFCSJ-OEM-OCC) and sensor-ready driver
VRF/DSR	Lutron Vive integral fixture control, RF only (DFCSJ-OEM-RF) and sensor-ready driver
VDO/DBI/LDE1	Lutron Vive integral fixture control, RF with daylight and occupancy sensor (DFCSJ-OEM-OCC), Lutron Hi-lume 1% EcoSystem dimming LED driver, and digital link interface
VDO/DBI/LDE5	Lutron Vive integral fixture control, RF with daylight and occupancy sensor (DFCSJ-OEM-OCC), Lutron 5-Series 5% EcoSystem dimming LED driver, and digital link interface
VRF/DBI/LDE1	Lutron Vive integral fixture control, RF only (DFCSJ-OEM-RF), Lutron Hi-lume 1% EcoSystem dimming LED driver, and digital link interface
VRF/DBI/LDE5	Lutron Vive integral fixture control, RF only (DFCSJ-OEM-RF), Lutron 5-Series 5% EcoSystem dimming LED driver, and digital link interface
ELDO SOLOB	EldoLED Solodrive, 0.1% dimming driver for 0-10V controls
ELDO SOLOB DALI	EldoLED Solodrive, 0.1% dimming driver for DALI controls
ELDO ECO1	EldoLED Ecodrive, 1% dimming driver for 0-10V controls
ELDO ECO1 DALI	EldoLED Ecodrive, 1% dimming driver for DALI controls

DIFFUSE CENTER DECORATIVE INSERT DETAILS

TRIPLE WAVE




BRUSHED METAL




ELLIPTICAL PERF



CIRCLES



STRIPES



TRI-PYRAMID

