




# Micro LED Emergency Light

## LED Lamps - High Output - Remote Capable

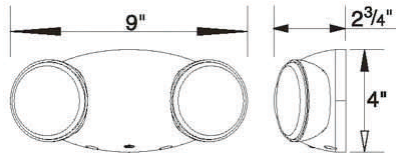

- Fully adjustable, glare-free LED lamp heads
- LED Life Expectancy is more than 10 years
- Injection-molded, High Impact, UV-Stabilized
- UL 94 V-0 Thermoplastic - White Housing
- Snap-together construction speeds installation
- Universal J-box pattern mounting plate with quick connect features
- 120/277 V AC
- Test switch
- LED status indicator light
- Maintenance free, rechargeable NI-Cad battery
- 90 minutes of emergency power
- Model #73114 has Remote Capability for up to 2 Additional LED Remote Lamp Heads
- Base Unit:
  - 2 heads - 3 hours operation
  - 3 heads - 2 hours operation
  - 4 heads - 1.5 hours operation
- Damp location listed
- UL 924



Cat No.	Color	Length	Depth	Height	Lumens Per Head	Case Qty	Each
73118	White	9"	2.75"	4"	33	12	\$12.50

### High Output

Cat No.	Color	Length	Depth	Height	Lumens Per Head	Case Qty	Each
73112	White	9"	2.75"	4"	76	12	\$18.00

### High Output Remote Capable

Cat No.	Color	Length	Depth	Height	Lumens Per Head	Case Qty	Each
73114	White	9"	2.75"	4"	76	12	\$22.60

### Remote LED Lamp Heads

Cat No.	Width	Depth	Height	Housing	Lumens Per Head	Case Qty	Each
73116	4.50"	2.75"	4.5"	White	76	6	\$9.75
73117	6.50"	2.75"	4.75"	White	76	6	\$10.95




# Micro Combo LED Exit Sign/Emergency Light

## LED Lamps - High Output - Remote Capable



- Combination LED Energy Saving Exit Sign and LED Emergency Lighting Unit In One Compact Design
  - **Long Life Energy Saving LED Lamps**
  - Completely Self-Contained
  - Fully Automatic Operation
  - Push to Test Switch
  - Automatic Low Voltage Disconnect (LVD)
  - 120 or 277 VAC Operation
  - Charge Rate/Power On LED Indicator Light
  - Energy Consumption of Less than 4 Watts for Red letters and Less than 2 Watts for Green Letters
  - Injection-Molded, UL 94 V-O Flame Retardant, High Impact, Thermoplastic Housing
  - Fully Adjustable Glare-Free LED Lamps
  - Heads Rotate for Maximum Field Flexibility
  - Universal Mounting Canopy for Top or Back J-box Installation & 2 Snap-fit Face Plates
  - Field replaceable chevron directional indicators
  - Integral wiring channels to facilitate installation
  - 6-Volt Sealed Ni-Cad Rechargeable Maintenance-Free Battery
  - Environmentally-Coated, Solid State Charger
  - Models #73054 & 73056 have Remote Capability for up to 2 Additional LED Remote Lamp Heads
- Base Unit:
- 2 heads - 3 hours operation
  - 3 heads - 2 hours operation
  - 4 heads - 1.5 hours operation
- Damp Location Rated, UL 924 Listed

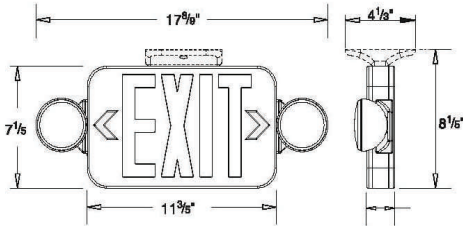

Cat No.	Width	Depth	Height	Led Color	Housing	Lumens Per Head	Case Qty	Each
73040	11.60"	2.00"	7.20"	Red	White	33	6	\$22.95
73042	11.60"	2.00"	7.20"	Green	White	33	6	\$24.95

### High Output

Cat No.	Width	Depth	Height	Led Color	Housing	Lumens Per Head	Case Qty	Each
73050	11.60"	2.00"	7.20"	Red	White	76	6	\$32.93
73052	11.60"	2.00"	7.20"	Green	White	76	6	\$34.95


### High Output Remote Capable

Cat No.	Width	Depth	Height	Led Color	Housing	Lumens Per Head	Case Qty	Each
73054	11.60"	2.00"	7.20"	Red	White	76	6	\$36.52
73056	11.60"	2.00"	7.20"	Green	White	76	6	\$38.52

### Remote LED Lamp Heads

Cat No.	Width	Depth	Height	Housing	Lumens Per Head	Case Qty	Each
73116	4.50"	2.75"	4.5"	White	76	6	\$9.75
73117	6.50"	2.75"	4.75"	White	76	6	\$10.95

## LED Exit Sign

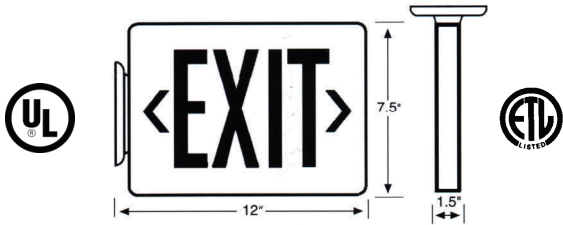

- Superior Quality Exit Unit Combined with LED Energy Saving Technology In a Low-Profile, Unobtrusive Design
- Completely Self-Contained
- Fully Automatic Operation
- Compact, Low Profile Design in Neutral Finish
- Push to Test Switch in Battery Backup Units
- Automatic, Low Voltage Disconnect (LVD)
- 120 or 277 VAC Operation
- Injection-Molded, V-O Flame Retardant, High Impact, Thermoplastic Housing
- Charge Rate/Power On LED Indicator Light
- Energy Consumption of Less than 4 Watts for Red Letters and Less than 2 Watts for Green Letters
- Listed for Damp Location
- Universal Mounting Canopy & 2 Face Plates for Side or Top Installation
- Standard AC and Emergency Units Available
- Ni-CAD Battery On Battery Backup Units
- 90 Minute Battery Run Time
- 700MAH 4.8V Nicad Battery

Cat No.	LED Color	Housing	Battery Backup	Case Qty	Each
73010	Red	White	No	6	12.75
73012	Red	White	Yes	6	12.50
73013	Red	Black	Yes	6	24.69
73014	Green	White	No	6	13.75
73016	Green	White	Yes	6	13.75
73017	Green	Black	Yes	6	27.04

### Remote Capable Units

Cat No.	LED Color	Housing	Battery Backup	Case Qty	Each
73022	Red	White	Yes	6	47.03
73023	Red	Black	Yes	6	52.91
73024	Green	White	Yes	6	50.56
73025	Green	Black	Yes	6	56.44

### 2 Circuit Unit Wired For AC Power & DC Generator Backup

Cat No.	LED Color	Housing	Case Qty	Each
73026	Red	White	6	23.51
73028	Green	White	6	27.04

### Salida Face Plates

Cat No.	Lettering	Led Color	Housing	Each
73005	SALIDA	Red	White	3.53