

Project Name: \_\_\_\_\_ Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

### INTENDED USE

Our Wet Location Linear Vapor Tight LED Light is designed for rugged environments, featuring a sealed, moisture-resistant housing that protects against dust, water, and environmental contaminants. Constructed from high-quality polycarbonate (PC) material, this fixture ensures exceptional durability and stability, while stainless steel clips allow for quick and secure installation. Offering adjustable lumen outputs and selectable color temperatures, it provides customizable illumination to suit various applications. For added versatility, optional emergency battery backup and sensor controls enhance performance and energy efficiency. Ideal for outdoor venues, canopies, locker rooms, parking garages, and industrial facilities, this vapor-tight LED fixture delivers long-lasting, reliable, and energy-efficient lighting in demanding conditions



### FEATURES

**Construction:** Polycarbonate (PC) for exceptional durability and stability, with stainless steel clips for quick and easy installation

**Color Temperature:** 35/40/50K Selectable switch

**Finish:** White

**Voltage:** Universal 120-277 VAC

**Driver:** 0-10V dimming down to 10%

**Power Adjustable:** Each model features three selectable wattage levels for customized performance

**CRI:** 80+

**Power Factor:** ≥90%

**Total Harmonic Distortion:** <20%

**Operating Temperature:** -22°F to 122°F

**Weight:** 6.06lbs (4 Foot), 13lbs (8 Foot)

**Life:** 100,000 Hours LED lifespan based on IES LM-80 results and TM-21 calculations

**Optional Emergency Battery:** 8 Watts, 900 lm, 90min

**Listing:** UL, cUL wet location listed, IP65, DLC Listed


**Warranty:** 5 years carefree for parts & components (Labor not included)



### ORDERING INFORMATION Example:


Model	Size	Mounting	Options
11172	4 4 Foot 8 8 Foot	S Surface <sup>Standard</sup> P Pendant <sup>1</sup>	EM8 8 Watt Emergency Battery MS Microwave Sensor

<sup>1</sup> Pendant mounts to a 9.5 Feet Aircraft Cable.

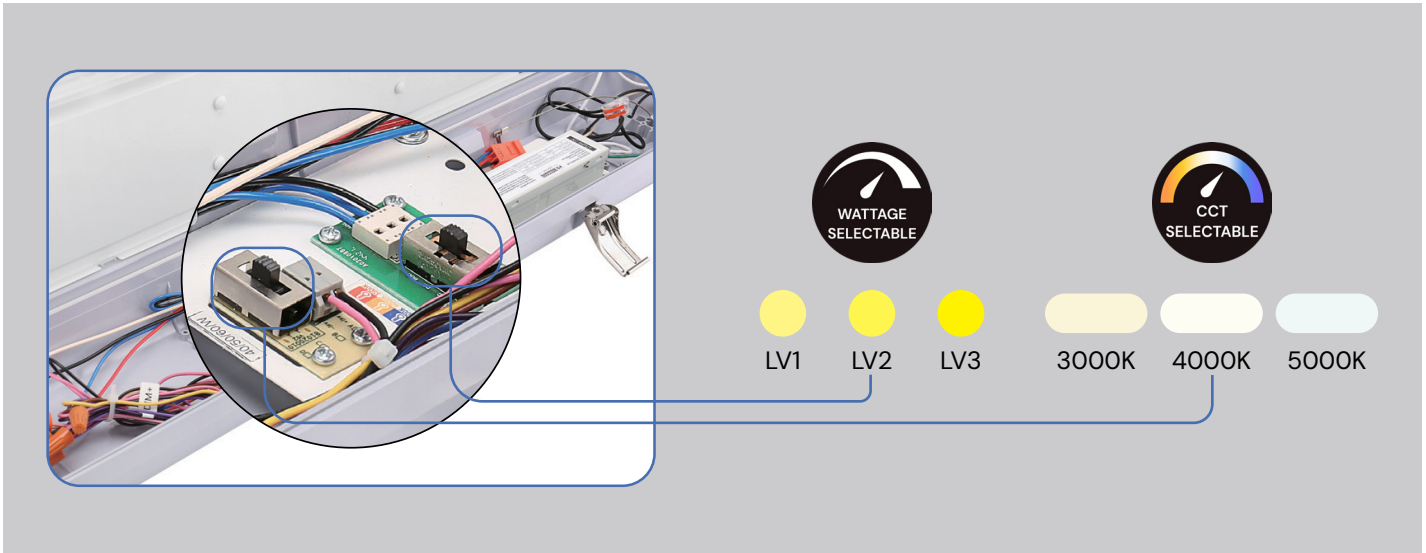


## LINE DRAWINGS

### 4 Foot

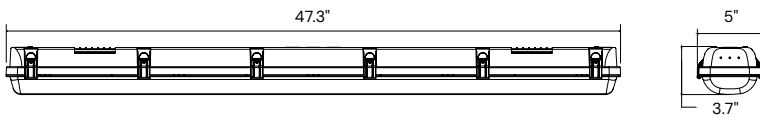


### 8 Foot

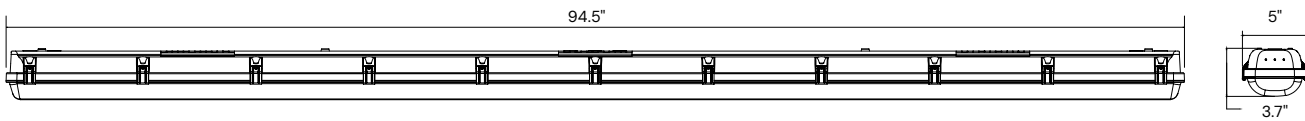


## OPTIONS



**EM8**  
**8 Watt Emergency Battery**  
 90 minutes producing 900 lumens



**MS**  
**Microwave Sensor**  
 12VDC input



**Pendant Mount**  
**9.5 Feet Aircraft Cable**

## PERFORMANCE DATA

4 Foot							
SETTING	SYSTEM WATTS	3500K		4000K		5000K	
		LUMENS (80CRI)	LPW (80CRI)	LUMENS (80CRI)	LPW (80CRI)	LUMENS (80CRI)	LPW (80CRI)
LV1	50W	6700lm	134 lm/W	7000lm	140 lm/W	6900lm	138 lm/W
LV2	35W	4780lm	137 lm/W	5000lm	143 lm/W	4900lm	140 lm/W
LV3	25W	3500lm	140 lm/W	3650lm	146 lm/W	3560lm	142 lm/W

8 Foot							
SETTING	SYSTEM WATTS	3500K		4000K		5000K	
		LUMENS (80CRI)	LPW (80CRI)	LUMENS (80CRI)	LPW (80CRI)	LUMENS (80CRI)	LPW (80CRI)
LV1	90W	12200lm	136 lm/W	12800lm	142 lm/W	12500lm	139 lm/W
LV2	75W	10300lm	137 lm/W	10800lm	144 lm/W	10500lm	140 lm/W
LV3	60W	8300lm	138 lm/W	8800lm	147 lm/W	8500lm	142 lm/W

## COLOR TEMPERATURE GUIDE

