


Project Name: \_\_\_\_\_ Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

### INTENDED USE

Alcon Lighting's Outdoor Linear Wall Wash LED Light is expertly designed for illuminating building facades, signage, and other wall-washing applications. Available in four sizes and five color temperatures (2700K, 3000K, 3500K, 4000K, 5000K), this fixture offers versatile lighting solutions for a wide range of projects. With a variety of optical lens options—including narrow, medium, wide, and elliptical beams—this light can be tailored to meet specific needs. Choose from three premium finishes: white, black, or titanium grey, to seamlessly integrate with any architectural style.

### FEATURES

- Construction:** Extruded Aluminum
- Color Temperature:** 27/30/35/40/50K
- CRI:** 90+
- Voltage:** 120-277V
- Driver:** 0-10V
- Operating frequency:** 50/ 60 Hz
- Power Consumption:** 9 watt per ft.
- Lumen Output:** 100 lumens per watt (35K)
- Max run:** Linkable up to 60 ft.
- Operating Temperature:** -40°F to 122°F
- Life:** 50,000 Hours
- Listing:** ETL Listed, IP66 Outdoor/ Wet Location
- Warranty:** 5 years carefree for parts & components (Labor not included).

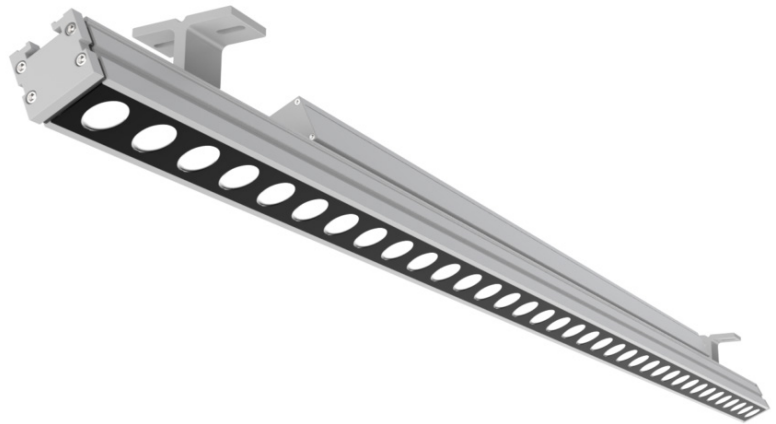



Size	Wattage	Lumens
1'	9W	900lms
2'	18W	1800lms
3'	27W	2700lms
4'	36W	3600lms

### ORDERING INFORMATION Example:


Model	Length	Optics	Color Temp	Finish	Mounting	Accessories
<b>11245</b>	<b>1</b> 1 ft.	<b>15</b> 15°	<b>27K</b> 2700K	<b>BK</b> Black	<b>ST</b> <sup>2</sup> Standard Tilting	<b>LC1</b> 1 ft. Link Cable
	<b>2</b> 2 ft.	<b>20</b> 20°	<b>30K</b> 3000K	<b>WH</b> White		
	<b>3</b> 3 ft.	<b>35</b> 35°	<b>35K</b> 3500K	<b>TG</b> Titanium Grey	<b>ET</b> Extended Tilting	<b>LC3</b> 3 ft. Link Cable
	<b>4</b> 4 ft.	<b>50</b> 50°	<b>40K</b> 4000K			
		<b>WW</b> <sup>1</sup> 10° x 40°	<b>50K</b> 5000K		<b>F</b> Fixed	<b>LC6</b> 6 ft. Link Cable
					<b>HC6</b> 6 ft. Hardwire Cable	
						<b>HC10</b> 10 ft. Hardwire Cable
						<b>LV</b> Symmetric Anti-Glare Louver

<sup>1</sup>For wall wash applications  
<sup>2</sup>Two Standard Tilting brackets are included. Further information in Pg. 3.


LINE DRAWINGS

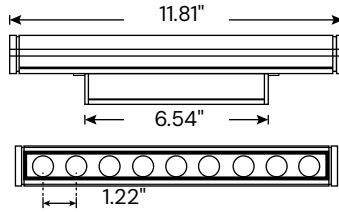


11245-1

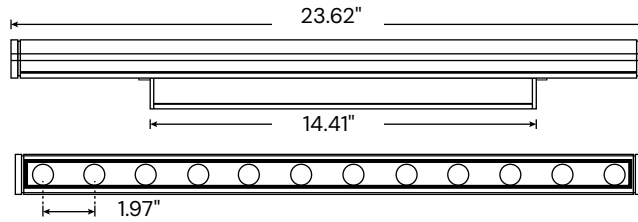

11245-2

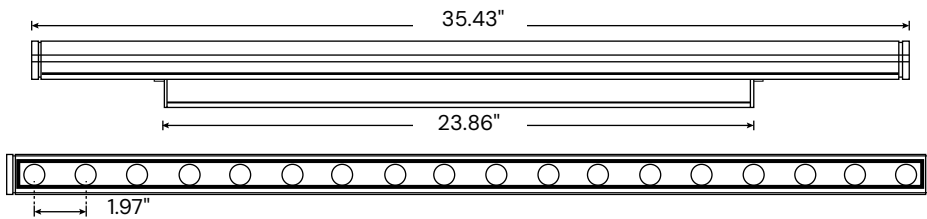


11245-3

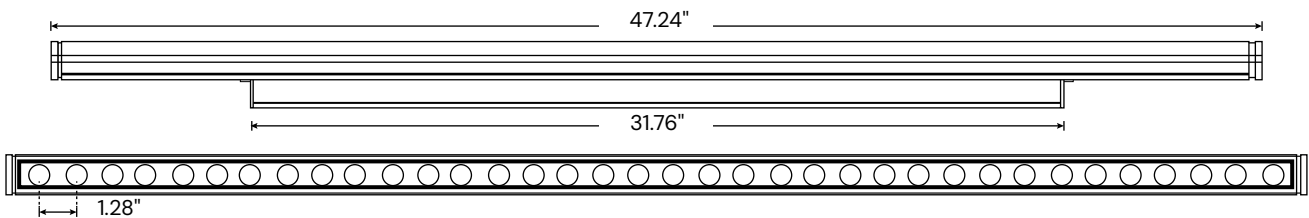


11245-4


## OPTICS




15°




20°



35°



50°




10° X 40°

## MOUNTING BRACKETS

### Standard Tilting

Included with every Fixture

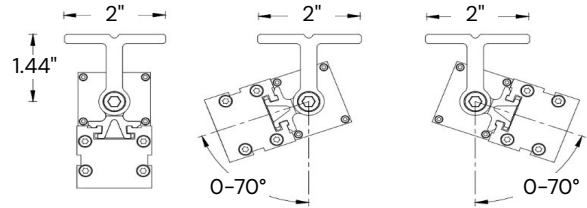


### Fixed Mounting

Sold separately



### Extended Tilting

Sold separately

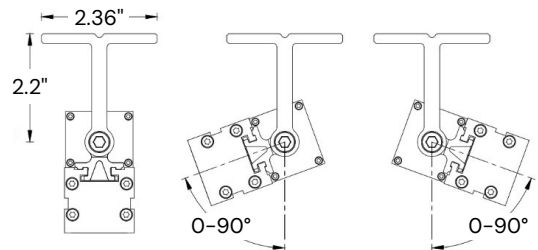

## ACCESSORIES

### Link Cable

Link extension cable is available in 1 ft., 3 ft., and 6 ft.

- LC1
- LC3
- LC6



### Hardwire Cable



Hardwire cable is available in 6 ft. and 10 ft.

- HC6
- HC10



### Symmetric Anti-Glare Louver

LV

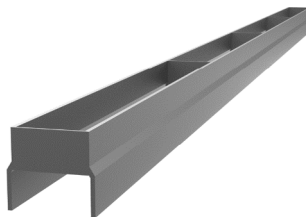

## COMPATIBLE DIMMERS

			
<b>0-10 V</b>	<a href="#">2100</a> <a href="#">2101</a> <a href="#">2102</a>	Diva DDTV	IP-710-DL

## COLOR TEMPERATURE GUIDE



<p><b>2700K</b></p> <p><b>WARM WHITE</b></p> <p>friendly personal intimate</p> <p>HOMES LIBRARIES RESTAURANTS</p> <p>✓</p>	<p><b>3000K</b></p> <p><b>SOFT WHITE GLOW</b></p> <p>soft warm pleasing</p> <p>HOMES HOTEL ROOMS LOBBIES RETAIL STORES</p> <p>✓</p>	<p><b>3500K</b></p> <p><b>NEUTRAL GLOW</b></p> <p>sociable inviting non-threatening</p> <p>EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS</p> <p>✓</p>	<p><b>4000K</b></p> <p><b>COOL WHITE GLOW</b></p> <p>neat clean efficient</p> <p>OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS</p> <p>✓</p>	<p><b>5000K</b></p> <p><b>DAYLIGHT GLOW</b></p> <p>bright cool alert</p> <p>GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS</p> <p>✓</p>
--	---	--	---	--