

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

This wall sconce, available in either a fully covered frosted acrylic lens or a two-piece perforated white lens, is ideal for modern, architectural-grade interiors such as hallways, bathrooms, retail and educational spaces.

DETAILS

Construction: Die formed 20 gauge cold-rolled steel housing

Voltage: 120-277V

Dimming: 0-10V 10%~100%

Finish: Matte White



Ambient Operating Temperature: 22°F (-30°C) ~ 122°F (50°C)

Life: 50,000 Hours

Warranty: 5 years Carefree for parts & components

(Labor not included)

Listings: UL, Suitable for Damp Location, ADA compliant, Assembled in the USA

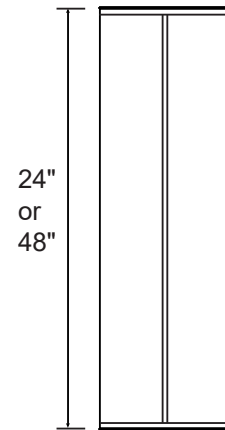

Ordering Information: Example: (11705-2-18-30K-S)

Model	Length Wattage Lumens	Color Temp	Lens	Options
11705	2-18 2 Foot 18 Watts 2340 Lumens	30K 3000K	S Fully Covered Frosted Acrylic Lens	REM8 Remote 8W Emergency Back-up Battery
	2-26 2 Foot 26 Watts 3380 Lumens	35K 3500K	D 2-Piece Perforated White Lens	REM15 Remote 15W Emergency Back-up Battery
	4-36 4 Foot 36 Watts 4680 Lumens	40K 4000K		REM20 Remote 20W Emergency Back-up Battery
	4-54 4 Foot 54 Watts 7020 Lumens	50K 5000K		