

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

Add this commercial-grade linear outdoor pendant or surface-mounted LED to wet-location applications. This satin aluminum product runs in standard lengths of 4' and 8' and can be joined together in seamless runs of any length. With various voltages, a frosted lens and color temperature options, the lighting fixture is perfect for commercial-grade projects. The beam spread is 120°. Lumens output is 4,900 Kelvin.

PRODUCT FAMILY

12100-35-P | Pendant

12100-35-S | Surface

AVAILABLE LENGTHS

4FT | W 3.58" x L 48.7" x H 3.58"

8FT | W 3.58" x L 96.7" x H 3.58"

Continuous Run | Consult Factory

FEATURES

Construction: Satin aluminum. Connectors and seals are waterproof.

Continuous Run: Full ability to tandem mount for continuous run application, equipped with male & female quick-connect harnesses

Finish: Satin silver

Mounting: 2' stem with 6' field cuttable black power cable kit for pendant-mount, bracket for surface-mount

Lens: Glare-free snap-in frosted acrylic for even distribution

Voltage: 120-277V

Wattage: 45 watts per 4 foot section

Lumens: 4900 lumens per 4 foot section





Dimming: 0-10V (120-277V)

CRI: 80

Life: 50,000 hours L70

Warranty: 5 years carefree for parts & components (Labor not included)

Listings: IP66-Rated for wet locations, CA Title 24 compliant, cETL listed, LED chips tested to LM-80 standards, Assembled in the USA

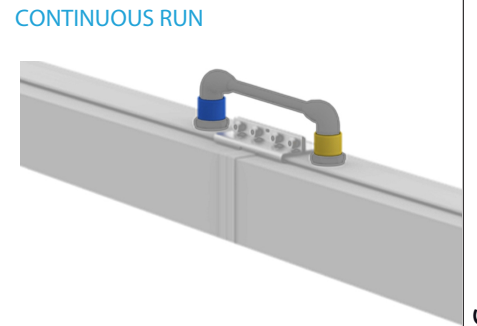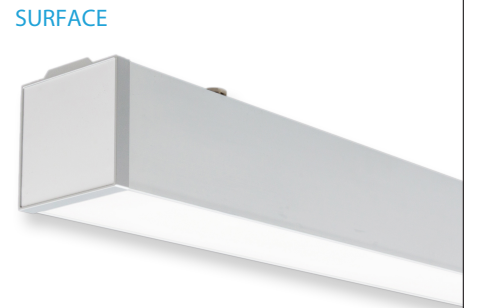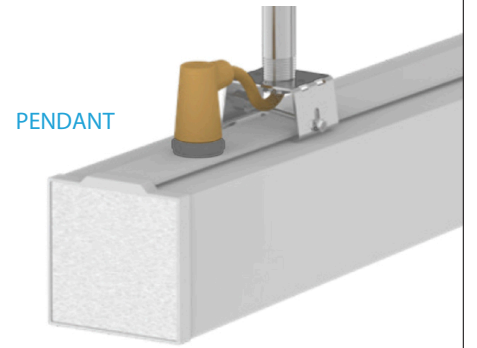

Alcon 12100-35 Linear Pendant or Surface-Mounted Wet-Location LED Light

ORDERING INFORMATION Example: (12100-35-P-S-4-40K)

Model	Mounting	Shape	Color Temp	Options
12100-35 Wet Location Linear Fixture	P Pendant S Surface	S Single Unit CR¹ Run	4' or 8' 40K 4000K 50K 5000K	EM Remote Emergency Inverter
		Total Run (in Feet)		
		<div style="border: 1px solid black; width: 100px; height: 20px; display: flex; justify-content: space-between;"> </div>		

¹ Continuous Run can only be created with 4' and 8' lengths

COLOR TEMPERATURE GUIDE

<p>2700K</p> <p>WARM WHITE</p> <p>friendly personal intimate</p> <p>HOMES LIBRARIES RESTAURANTS</p> <p>X</p>	<p>3000K</p> <p>SOFT WHITE GLOW</p> <p>soft warm pleasing</p> <p>HOMES HOTEL ROOMS LOBBIES RETAIL STORES</p> <p>X</p>	<p>3500K</p> <p>NEUTRAL GLOW</p> <p>sociable inviting non-threatening</p> <p>EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS</p> <p>X</p>	<p>4000K</p> <p>COOL WHITE GLOW</p> <p>neat clean efficient</p> <p>OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS</p> <p>✓</p>	<p>5000K</p> <p>DAYLIGHT GLOW</p> <p>bright cool alert</p> <p>GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS</p> <p>✓</p>
---	--	---	--	---