

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Our wet-location linear architectural LED lights come with a variety of color temperature, dimming, CRI and voltage options. Ideal for commercial, hospitality and residential outdoor lighting, this 4-inch lens opening fixture offers optimal performance and versatility. This linear fixture can be joined together for seamless runs of any length. Available with varying options in lumen output.

PRODUCT FAMILY

12100-45-P Pendant Mount
12100-45-W Wall Mount
12100-45-S Surface Mount
12100-45-R Recessed Mount









AVAILABLE LENGTHS

2FT, 3FT, 4FT, 6FT & 8FT
Continuous Run | Consult Factory
Custom Length | Consult Factory



FEATURES


Construction: Aluminum extrusion with flat end caps, painted finish with premium paint
Continuous Run: Full ability to tandem mount for continuous run application
Custom Design: Offered with pre-fabricated and fully illuminated corners
Lens: Glare-free, frosted acrylic snap-in flat
Voltage: 50/60 Hz Constant current @ 120-277V
Dimming: 0-10V down to 10%
Life: 50,000 Reported L70 Hours @ 55°C
Operating Temperature: 4°F (-20°C) ~ 122°F (50°C).
Warranty: 5 years Carefree for parts & components (Labor not included)
Listings: UL, Made in U.S.A, Buy American Act Compliant (BAA), Build America, Buy America Act Compliant (BABA), Trade Agreements Act Compliant (TAA)




ORDERING INFORMATION Example:

MODEL		12100-45 4" x 4.5"			
MOUNTING		P Pendant W Wall S Surface		RT Recessed T-Bar Grid RS Recessed Screw Slot Grid RF Recessed Flanged RTL Recessed Trimless	
DOWNLIGHT OPTICS		D Direct I Indirect DI Direct/Indirect		DW Direct Wallwash DWI Direct Wallwash / Indirect	
DOWNLIGHT LUMENS		D3 3.125 Watts 500 lms D4 4.375 Watts 700 lms D6 6.25 Watts 1000 lms D8 8.75 Watts 1400 lms			
Wattage & Lumens per foot					
SHAPE		Sx Single Run CRx Continuous Run RCx Rectangle SQxx Square Xxx Cross Txx Tee Uxx U	x = 2', 3', 4', 6' or 8' x = Length xx = Width & Length xx = Width & Length xx = Width & Length xx = Leg 1 & Leg 2 xx = Top leg & Base Leg xx = Base Leg & Side Leg	CWxx Ceiling to Wall 90xx 90° Angle 135xx 135° Angle CU Custom	xx = Ceiling & Wall xx = Leg 1 & Leg 2 xx = Leg 1 & Leg 2
COLOR TEMPERA TURE		27K 2700K Soft White 30K 3000K Soft White 35K 3500K Neutral White 40K 4000K Cool White 50K 5000K Daylight			
FINISH		WH White (Matte) RAL# Specify RAL # (Pg. 3)			
PENDANT MOUNTING		Blank None Required		AC8 8.25' Adjustable Aircraft Cable AC12 12.5' Adjustable Aircraft Cable ACX Specify X in Feet (Max 30') ST2 2' Stem STX Specify X in Feet (Max 8')	
CORD / CANOPY FINISH		WH/WH White Cord / White Canopy WH/BK White Cord / Black Canopy BK/BK Black Cord / Black Canopy BK/WH Black Cord / White Canopy		WH/RAL# White Cord / Specify RAL # (Page 3) BK/RAH# Black Cord / Specify RAL # (Page 3)	
CRI		8 80+		9 90+	
OPTIONS		EM12 1200L Emergency Battery OS Occupancy Sensor		WMA White Matte Antimicrobial Paint	


Pendant

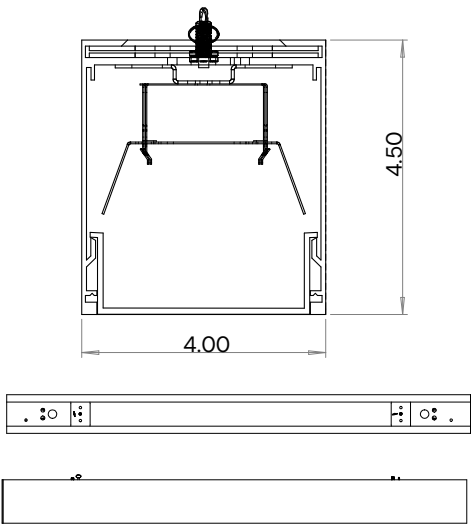


Surface

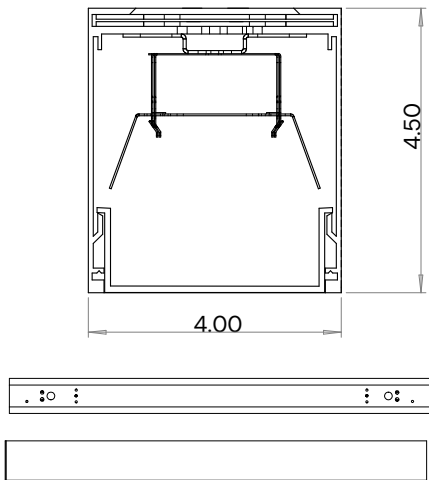


Wall

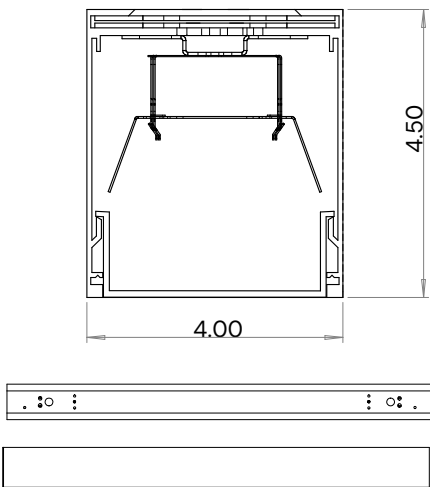


Recessed

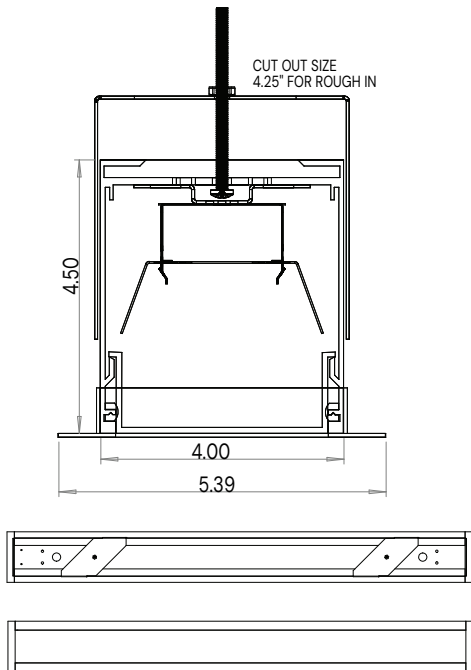


12100-45-D3 (500 Lumens per foot)

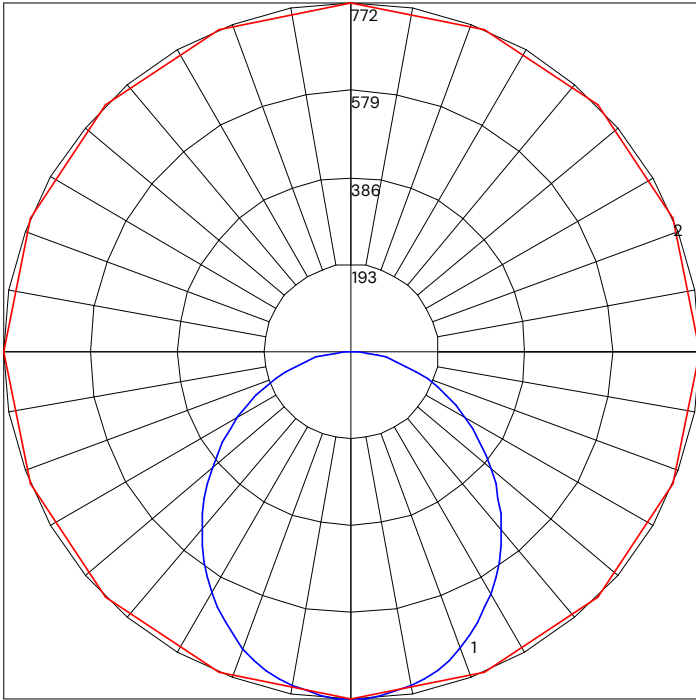


12100-45-D4 (750 Lumens per foot)

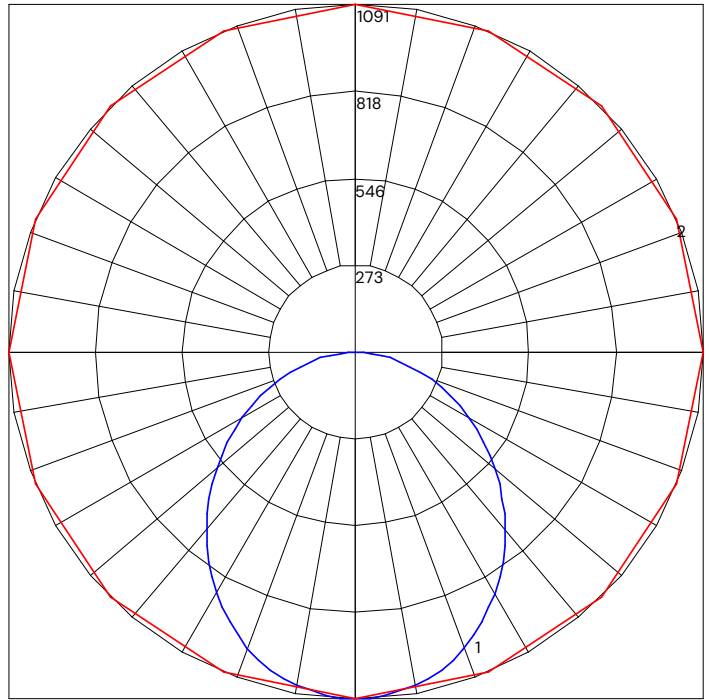

12100-45-D6 (1000 Lumens per foot)

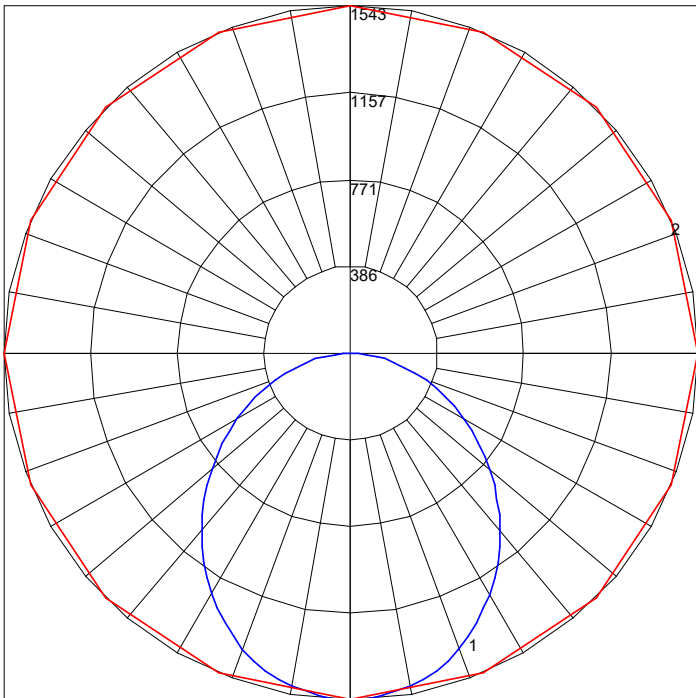

12100-45-D8 (1400 Lumens per foot)

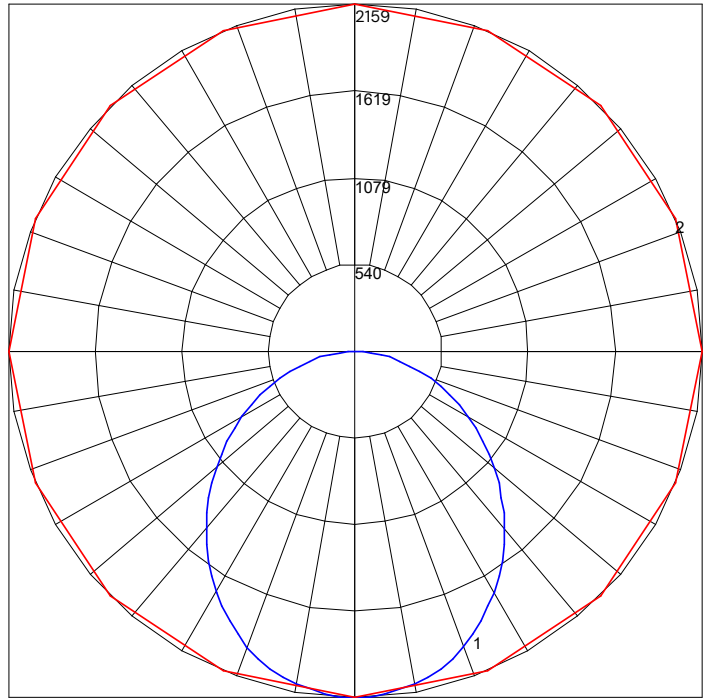

Available Tiger Drylac Finishes

Standard


	Matte White	49/11350
--	-------------	----------

Set up fee and longer lead time will be applied on non-standard finishes.

Metropolitan

	Gloss White	49/10410
	Matte Black	039/80020
	Gloss Black	49/88888
	Matte Silver	49/90500
	Gloss Silver	49/99999
	Matte Bronze	38/60080

Vibrant

	Glimmer Iron	49/84340
	Gloss Yellow	039/20020
	Gloss Orange	039/20010
	Gloss Red	49/31100
	Glossy Fire Engine Red	09/30100
	Glossy Blue	049/44444

Compatible Dimmers



2100

0-10V Wireless 5-Wire to 3-Wire
Modern LED Wall Dimmer



2101

0-10V Slide-to-Off Modern LED
Dimmer Switch Single-Pole



2102

0-10V Modern LED Dimmer
Switch 3-Way/Single-Pole

Mfg.	Model	Mfg.	Model	Mfg.	Model
Lutron	S-603PG	Lutron	DVELV-303P	Lutron	CT-103P
Leviton	IPIO6-1LZ	Lutron	SELV-300P	Cooper	SLC03P
Leviton	6631-2	Leviton	6683-IW	Leviton	IPE04
Lutron	DVCL-153P	Leviton	6161	Lutron	MAELV-600
Lutron	DV-600P	Leviton	6633-P	Lutron	FAELV-500
Lutron	TGCL-153P	Lutron	TG-600P	Lightolier	ZP260QEW
Lutron	S-600P	Cooper	DLC03P	Cooper	DAL06P
Leviton	VPE06	Lutron	LG-600P	Leviton	IP710-DLZ

COLOR TEMPERATURE GUIDE

