


Project Name: _____ Type: _____ Quantity: _____

INTENDED USE



This specification-grade slim LED linear pendant provides continuous, clean high-CRI light and modern lines for commercial, hospitality, and residential interior lighting projects. Our modern, slim profiles and stylish low-voltage linear suspension lights offer direct lighting for various applications such as offices, classrooms, conference rooms, museums, retail outlets, hotels, and restaurants.

FEATURES

- Construction:** Durable military grade aluminum, field cuttable can be installed in any drywall thickness
- LED Driver:** Remote transformer is provided. Home run required at every 16'
- Lens:** Glare-free snap in frosted acrylic for even distribution
- Lumens:** 698 lm per foot
- Wattage:** 6.6 W per foot
- CRI:** 90+
- Voltage:** 24V LED Fixture, 100-277V LED Driver
- Remote Driver:** Dimmable 4-in-1 Triac, ELV, MLV & 0-10V
- Life:** 50,000 Hours
- Operating Temperature:** -40°F ~ 140°F (-40°C ~ 60°C)
- Beam Angle:** 120°
- Warranty:** 5 Years carefree for parts & components (Labor not included)
- Listings:** cUL / UL Listed, Title 24 JA8 Certified, IP45 (LED component only)

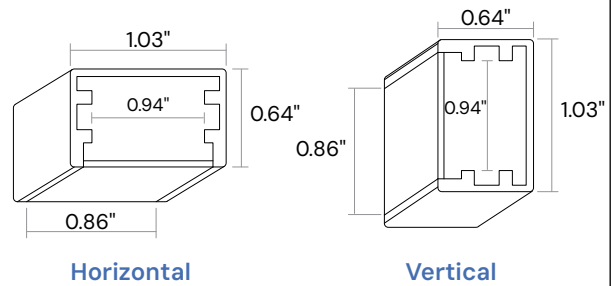


ORDERING INFORMATION Example:

Model	Shape	Color Temp	Finish	Lens	
12100-6	S _x CR _x	Single Run Continuous Run <i>x</i> = 2', 3', 4', 6' or 8' <i>x</i> = Length in feet	27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	SL Silver Anodized BK Black Anodized RAL# See Pg. 2 for custom finishes	FR Frosted BK ¹ Black
	SQV _{xx} RCV _{xx}	Square Vertical Rectangle Vertical <i>xx</i> = Width & Length <i>xx</i> = Width & Length			
	SQH _{xx} RCH _{xx}	Square Horizontal Rectangle Horizontal <i>xx</i> = Width & Length <i>xx</i> = Width & Length			

¹ The cover has a matte black surface that turns white when the light is turned on

INTENDED USE

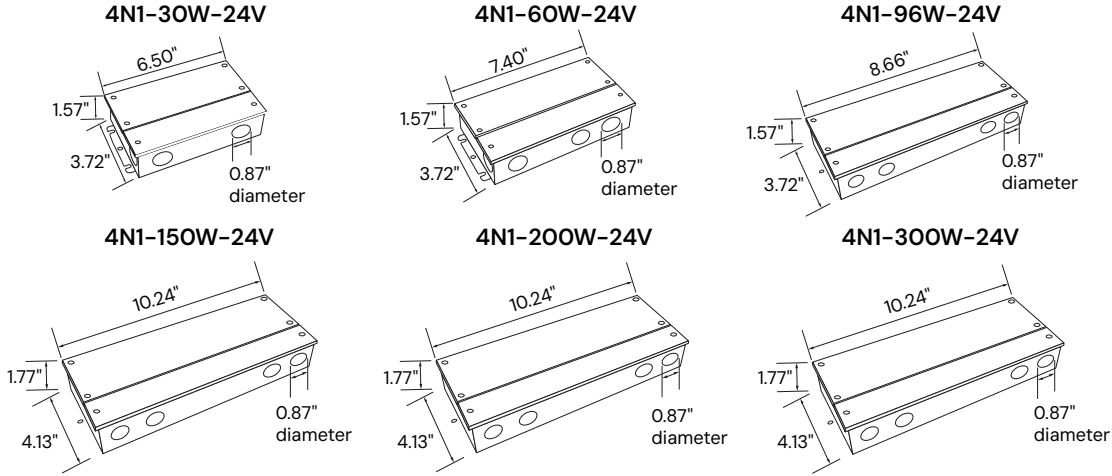

AVAILABLE FINISHES

Standard

	Silver Anodized	
	Black Anodized	

Set up fee and longer lead time will be applied on non-standard finishes.

Metropolitan

	Silver	RAL #9022
	Asher Grey	RAL #7004
	Mason	RAL #7039
	Slate	RAL #7031
	Tech Grey	RAL #7016
	Chocolate Spice	RAL #8017
	Urban Native	RAL #8025
	Carmin	RAL #8028
	Reseda Green	RAL #6011

Vibrant

	Violet Dreams	RAL #4006
	Purple Red	RAL #3004
	Carmine Red	RAL #3002
	Rose	RAL #3017
	Pure Orange	RAL #2004
	Traffic Yellow	RAL #1023
	Daisy	RAL #1018
	Antique Spring	RAL #6019
	Island Skye	RAL #6027
	Sky Blue	RAL #5015

COMPATIBLE DIMMERS

BRAND	MODEL	INPUT	RANGE	MODEL	INPUT	RANGE
	153PR-WH	100-130V	0-100%	DZ6HD	100-130V	22-100%
	DVCL-153PR-WH		0-100%	DV-600PR-BL		0-100%
	DVWCL-153PH-LA		0-100%	DV-600PR-WH		0-100%
	CTCL-153PDH-LA		0-100%	PD-6WCL		20-100%
	TGCL-153PR-WH		0-100%	PD-5NE-WH		18-100%
	TGCL-153PH-WH		0-100%	NTLV-600-277-WH		1-100%
	MACL-153MH-LA		20-100%	ST-12P-277		12-100%
	CT-600PR-IV		0-100%	NTF-10-277		1-100%
	CT-600PR-WH		0-100%	SELV-300P		15-100%
	CT-103PR-WH		2-100%	MSCELV-600M		0-100%
	MIR-600M		2-100%	MEF2-6ELV-120		0-100%
	TG-600PR-LA		4-100%	DVELV-300P		15-100%
	TG-600PR-IV		0-100%	S-600PR-WH		0-100%
	TG-600PR-WH		0-100%	MRF2-6ND-120-AL		0-100%
	TG-10PR-WH		0-100%	MRF2-6CL-GR		15-100%

	VPI06-1LZ	100-130V	15-100%	6672	100-130V	20-100%
	TTI06-1LZ		1-100%	6683		10-100%
	IPL06		15-100%	6602		0-100%
	DZ6HD		17-100%	AWSMT-EAW		0-100%
	TBL03		15-100%	AWSMT-EAW	277V	0-100%
	6674		16-100%			

	RHCL453PNICCV6	100-130V	6-100%			
	WSCL450TCCCV4		11-100%			
	LSCL453PLACCV4		11-100%			

	CLW-DELVEX-P-W-S	100-130V	11-100%			
--	------------------	----------	---------	--	--	--

COLOR TEMPERATURE GUIDE

