



Project Name: \_\_\_\_\_ Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

### INTENDED USE

Our semi-rigid LED light is a IP65 rated flexible LED fixture designed to be used in environments to create stunning 360 Degree illuminating designs. Suitable for indoor or outdoor applications, the flexible 360 Degree light offers many mounting such as horizontal or vertical surface and pendant.


### FEATURES

- Construction:** Factory-Installed Power Feed. Injection Moulded End-Caps
- Lens:** High performance acrylic optic securely attached to internal heat sink for maximum thermal dissipation
- Voltage:** 24V LED Fixture, 100-277V LED Driver
- Remote Driver:** Dimmable 4-in-1 Triac, ELV, MLV & 0-10V
- Wattage:** 6.08W per Ft
- Lumen:** 359 Lum per Ft (30K)
- CRI:** 90+
- Life:** 50,000 hours
- Max Run Length:** 16 Ft.
- Beam Angle:** 360 Degree
- Operating temperature:** -13°F ~131°F (-25°C ~ 55°C)
- Listings:** cULus listed, RoHS, Suitable for wet location, IP65 Rated, Flame Resistant, UV Resistant, Assembled in USA
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)

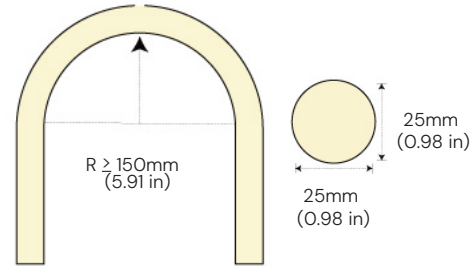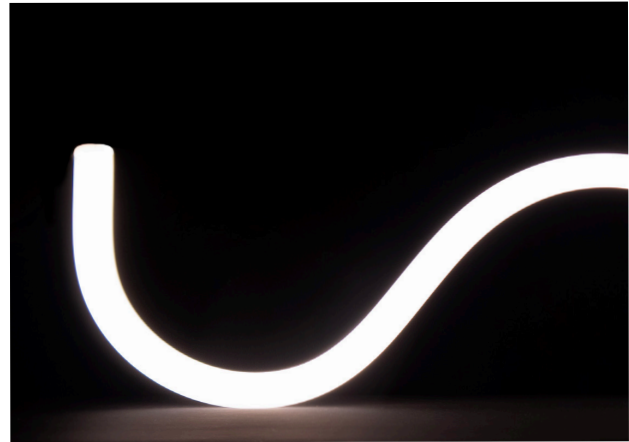

Minimum Bend Radius

### Mounting Options



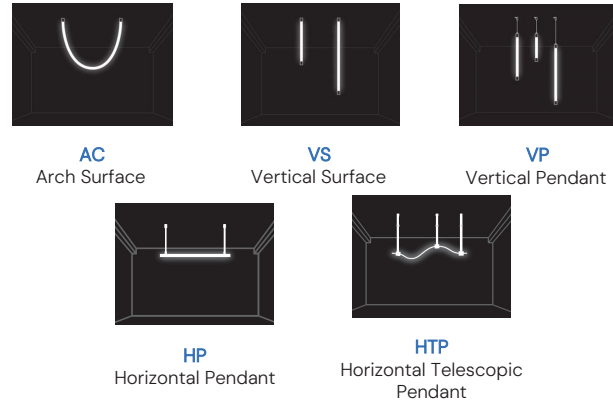


### ORDERING INFORMATION EXAMPLE: (12103-2-SR-VS-27K)




Model	Length	Power Feed	Mounting	Color Temp	RGB Controls	Options
12103	2 4 6 8 XX	SR Side Feed EF End Feed	AC Arch Surface VS Vertical Surface VP Vertical Pendant HP Horizontal Pendant HTP Horizontal Telescopic Pendant	24K 2400K 27K 2700K 30K 3000K 40K 4000K RGB RGB	(Blank) Not Required WIFI Mobile Application + WiFi RF RF Remote Control (White) DMX DMX Wall Control (White) DMX-W-WIFI DMX Wall Control (White) + WiFi DMX-B-WIFI DMX Wall Control (Black) + WiFi	VMC Visible Mounting Clip DMB Discreet Mounting Bracket IJ Infinity Joinder
	XX Custom Length <small>Replace XX with length in inches</small>					

## LINE DRAWINGS




### Arch Surface (AC)

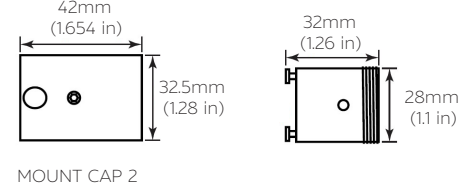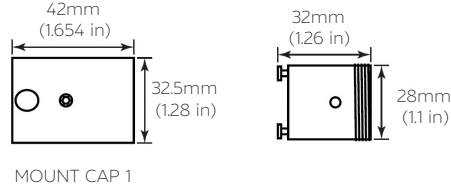





### Vertical Surface (VS)

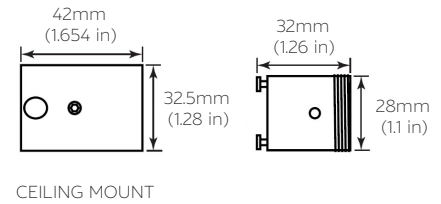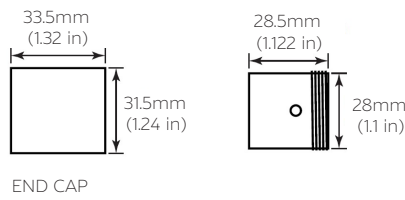


### Vertical Pendant (VP)

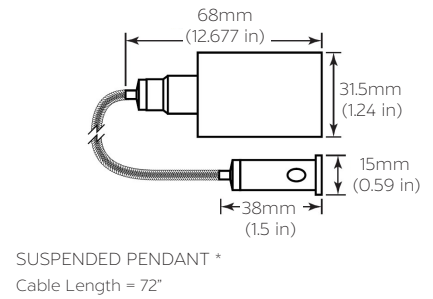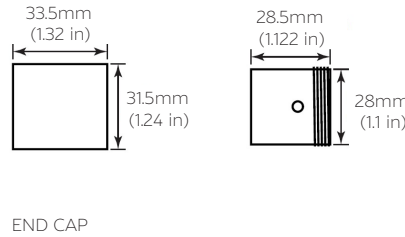



### Horizontal Pendant (HP)

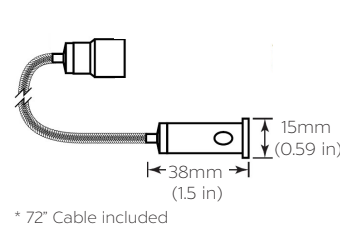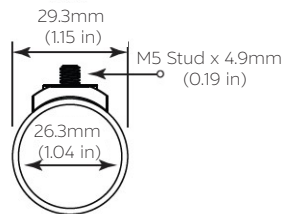

### Horizontal Telescopic Pendant (HTP)




\* 13 - 24" Extension

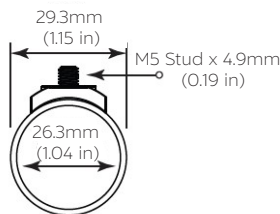


## ACCESSORIES



VISIBLE MOUNTING CLIP (VMC)

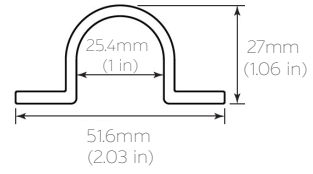


DISCREET MOUNTING BRACKET (DMB)

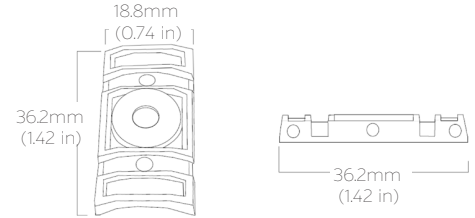


INFINITY JOINER (IJ)

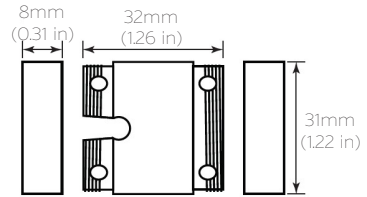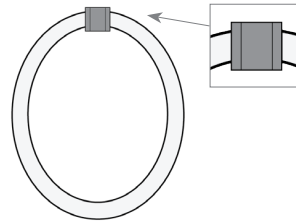

## END FEED DIMENSIONS

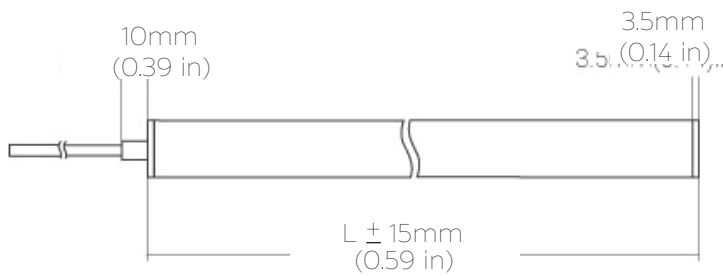


END FEED

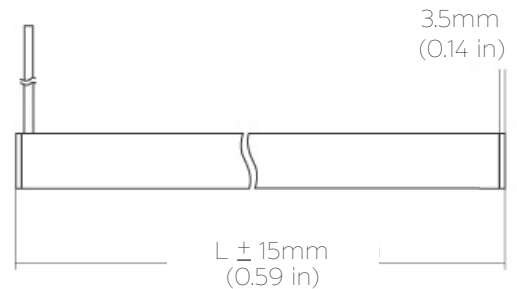


SIDE FEED

## POWER SUPPLY


4N1-30W-24V




4N1-60W-24V

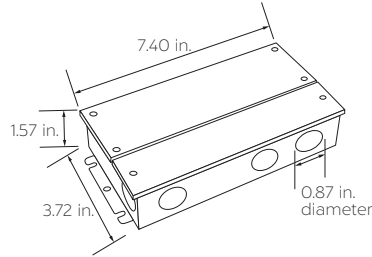


4N1-96W-24V

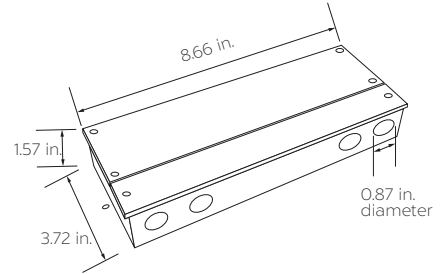


4N1-150W-24V

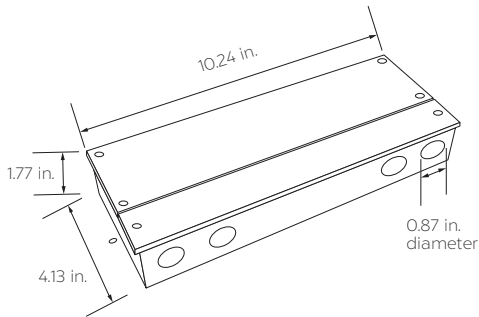

4N1-200W-24V

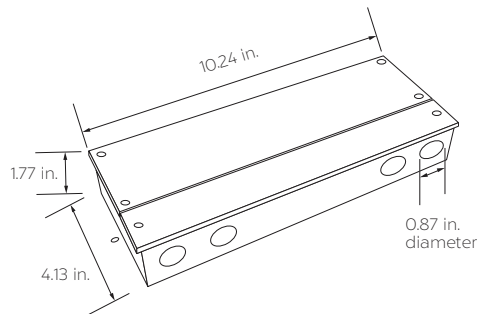

4N1-300W-24V

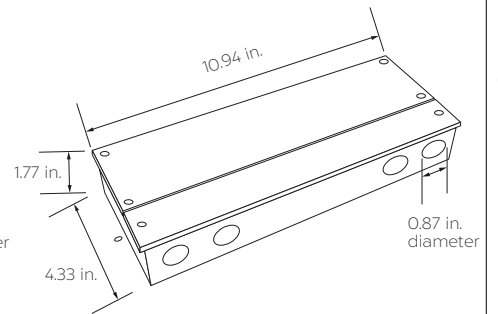

# COLOR TEMPERATURE GUIDE



**2700K**

WARM  
WHITE

friendly  
personal  
intimate

HOMES  
LIBRARIES  
RESTAURANTS



**3000K**

SOFT  
WHITE

soft  
warm  
pleasing

HOMES  
HOTEL ROOMS  
LOBBIES  
RETAIL STORES



**3500K**

NEUTRAL  
WHITE

sociable  
inviting  
non-threatening

EXECUTIVE OFFICES  
RECEPTION AREAS  
SUPERMARKETS



**4000K**

COOL  
WHITE

neat  
clean  
efficient

OFFICES  
CLASSROOMS  
MASS MERCHANDISERS  
SHOWROOMS



**5000K**

DAY  
LIGHT

bright  
cool  
alert

GRAPHICS INDUSTRY  
HOSPITALS  
GALLERIES  
BEAUTY SALONS

