

Project Name: _____ Type: _____ Quantity: _____


INTENDED USE

This industrial, commercial-grade LED linear light is available in 4-foot and 8-foot standard lengths, with a customizable finish color to suit various applications. Constructed from formed and welded 22-gauge steel, this corrosion-resistant fixture offers durability and long-lasting performance. Featuring a snap-in, glare-free lens, it delivers uniform, high-efficacy illumination for general and ambient lighting. Its versatile design allows for surface mounting on walls or ceilings, or pendant mounting with a specially engineered cable kit, making it an ideal solution for a wide range of settings.



FEATURES

- Construction:** 22-gauge steel, chemically treated to resist corrosion and improve paint adhesion, ensuring long-lasting performance
- Lens:** Textured prismatic lens for even light distribution and glare reduction
- Optical System:** Delivers uniform lighting with a seamless glow and no visible LED pixelation
- Voltage:** 120-277V
- Driver:** 0-10V dimming (120-277V)
- CRI:** 82+
- Life:** 100,000 Hours
- Power Factor:** >0.9
- Operating Temperature:** 86°F to 122°F
- Listings:** ETL and cETL Listed. Damp location rated, Made in USA
- Warranty:** 5 Year carefree for parts & components (labor not included)

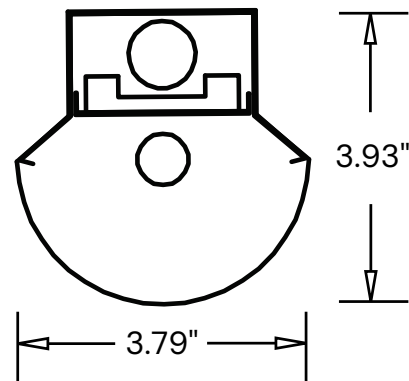

Alcon 12122 Lombardy Industrial Linear Surface-Mount LED Downlight Strip



ORDERING INFORMATION Example:

Model	Mounting	Length	Wattage Lumens	Color Temp	Finish	Pendant Mounting	Options
12122	S Surface P Pendant	4 4 Foot	33 33W 4650 lm	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White RAL#¹ Specify RAL # (Pg. 2)	Blank Not required	EM12 12 Watt, 1200 lm
		8 8 Foot	57 57W 7974 lm				
			80 80W 11,150 lm			AC4 4 Foot Aircraft Cable	
			86 86W 12,040 lm			AC8 8 Foot Aircraft Cable	
			93 93W 13,016 lm			AC20 20 Foot Aircraft Cable	
			112 112W 15,728 lm			ST2 2 Foot Stem	
			118 118W 16,500 lm			ST4 4 Foot Stem	
			143 143W 20,000 lm			ST8 8 Foot Stem	
			179 179W 25,000 lm				

¹ Additional Lead Time may apply

OPTIONAL OCCUPANCY SENSOR



OS

COLOR TEMPERATURE GUIDE

<p>2700K WARM WHITE</p> <p>friendly personal intimate</p> <p>HOMES LIBRARIES RESTAURANTS</p> <p>X</p>	<p>3000K SOFT WHITE GLOW</p> <p>soft warm pleasing</p> <p>HOMES HOTEL ROOMS LOBBIES RETAIL STORES</p> <p>✓</p>	<p>3500K NEUTRAL GLOW</p> <p>sociable inviting non-threatening</p> <p>EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS</p> <p>✓</p>	<p>4000K COOL WHITE GLOW</p> <p>neat clean efficient</p> <p>OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS</p> <p>✓</p>	<p>5000K DAYLIGHT GLOW</p> <p>bright cool alert</p> <p>GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS</p> <p>✓</p>
--	---	--	---	--