

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

The Architectural Wall Wash LED Light offers a versatile lighting solution for showcasing art, retail products, signage, and displays. An optional painted steel louver minimizes glare, while the 355° rotation and 0°–90° lockable gimbal tilt allow for precise directional control. This luminaire enhances adaptability, making it ideal for both commercial and residential wall wash applications where flexible, high-quality lighting is essential.



Louver lens

FEATURES

- Construction:** Aluminum housing with an optional painted Steel louver
- Lens:** Frosted Polycarbonate
- Color Temperature:** 30/35/40K Selectable Switch
- CRI:** 90+
- Voltage:** 120V
- Driver:** ELV
- Adjustability:** 355° Rotation/0°–90° Gimbal with lockable tilt.
- Mounting:** Compatible with H-Style 1 & 2 circuit tracks, and monopoint canopy
- Track Channel Type:** 1 and 2-Circuit/1-Neutral
- Beam Spread:** 100°
- Life:** 50,000 Hours
- Listing:** cULus Listed, ETL/cETL listed
- Warranty:** 3 years carefree for parts & components (Labor not included).



Flat lens



ORDERING INFORMATION Example:

Model	Length Lumens	Finish	Lens	Mount type
13125	11 11-Inch 1400lm	W White	Blank Flat	H ^{Standard} H-Style Track Channel ² J J-Style Track Channel ² L L-Style Track Channel ²
	19 ¹ 19-Inch 2600lm	B Black	LV Louver	



¹ Not available with white louver lens
² Track channels are sold separately.

PRODUCT FAMILY



Model	Product Type
13000-TC	Track Channel
13000-LC	Linear Connector
13000-OA	Outlet Adapter
13000-SC	Slope Ceiling Track Adapter
13000-TB	T-Bar End Feed
13000-FC	Floating Canopy Connector
13000-EC	End Cap
13000-LC	Live End with Canopy
13000-LE	Live End
13000-L	L-Connector
13000-T	T-Connector
13000-X	X-Connector
13000-MC	Mini Connector
13000-CP	Cord and Plug Connector
13000-PA	Pendant Adapter
13000-CC	Conduit Connector
13000-CK	Conduit Continuation Kit

LINE DRAWINGS

13125-11

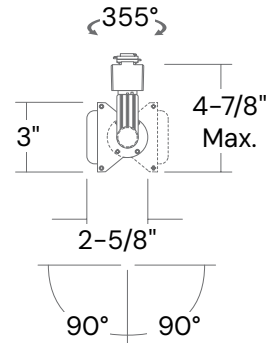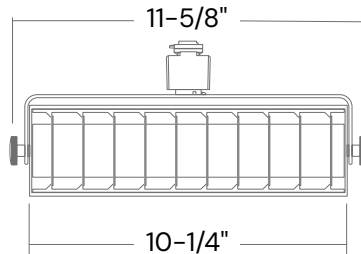


13125-19

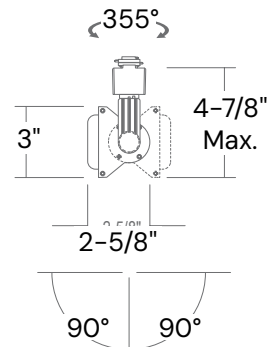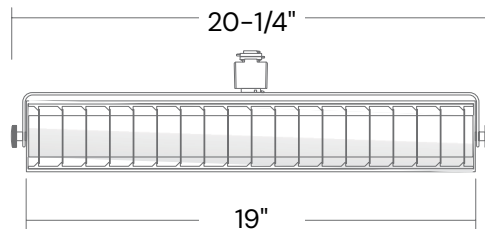


PHOTOMETRY

13125-11
20W | 1400lm

CANDELA TABULATION

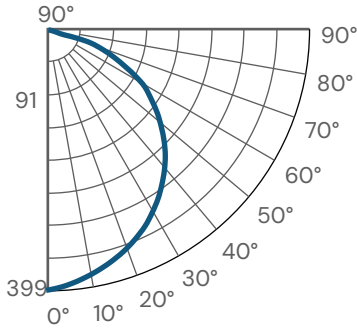


TRACK 3'
FROM WALL



19W LED
CCT: 3,088K

DISTANCE FROM CEILING	Single Fixture Performance						Multiple Fixture Performance*								
	0'	1'	2'	3'	4'	5'	4'			5'			6'		
1'	41.3	33.7	20.3	10.7	5.6	3	54	44.6	54	48	31.6	48	45.1	22.4	45.1
2'	35.4	29.8	19.1	10.9	6.1	3.4	49.3	43.2	49.3	43	31.6	43	39.8	23.1	39.8
3'	23.1	20.4	14.5	9.2	5.5	3.3	36.1	34	36.1	30.7	25.8	30.7	27.7	19.7	27.7
4'	13.8	12.7	9.9	6.9	4.5	2.9	24.9	24.4	24.9	20.7	19.1	20.7	18.2	15.2	18.2
5'	8.3	7.8	6.5	4.9	3.5	2.4	17.2	17.2	17.2	14.1	13.7	14.1	12.2	11.2	12.2
6'	5.2	4.9	4.3	3.4	2.6	1.9	12.2	12.2	12.2	10	9.9	10	8.6	8.2	8.6
7'	3.4	3.3	2.9	2.4	2	1.5	8.9	8.9	8.9	7.3	7.3	7.3	6.2	6.1	6.2
8'	2.3	2.2	2	1.8	1.5	1.2	6.6	6.7	6.6	5.5	5.5	5.5	4.7	4.7	4.7
9'	1.6	1.6	1.5	1.3	1.1	0.9	5	5.1	5	4.2	4.3	4.2	3.6	3.6	3.6

TRACK 4'
FROM WALL



19W LED
CCT: 3,088K


DISTANCE FROM CEILING	Single Fixture Performance						Multiple Fixture Performance*								
	0'	1'	2'	3'	4'	5'	4'			5'			6'		
1'	23	20.4	14.9	9.6	5.6	3.6	37	35.2	37	31.2	27	31.2	28	20.7	28
2'	22.1	19.8	14.8	9.9	6.3	3.9	37.2	35.8	37.2	31.2	27.7	31.2	27.7	21.6	27.7
3'	17.4	15.9	12.5	8.8	5.9	3.9	31.8	31.2	31.8	26.4	24.5	26.4	23.1	19.5	23.1
4'	12.3	11.4	9.4	7.1	5	3.5	24.9	24.8	24.9	20.5	19.8	20.5	17.8	16.1	17.8
5'	8.3	7.9	6.8	5.4	4	2.9	18.9	18.9	18.9	15.5	15.3	15.5	13.3	12.7	13.3
6'	5.6	5.4	4.8	4	3.1	2.4	14.3	14.3	14.3	11.7	11.7	11.7	10	9.8	10
7'	3.9	3.8	3.4	2.9	2.4	1.9	10.8	10.9	10.8	9	9	9	7.6	7.6	7.6
8'	2.8	2.7	2.5	2.2	1.9	1.5	8.3	8.4	8.3	6.9	7	6.9	5.9	5.9	5.9
9'	2	2	1.8	1.6	1.4	1.2	6.5	6.6	6.5	5.5	5.5	5.5	4.7	4.7	4.7

*Based on a minimum of five luminaires. Light Loss Factor: 1. Values are rounded to nearest 1/10th footcandle.


PHOTOMETRY

13125-19
40W | 2600lm

CANDELA TABULATION

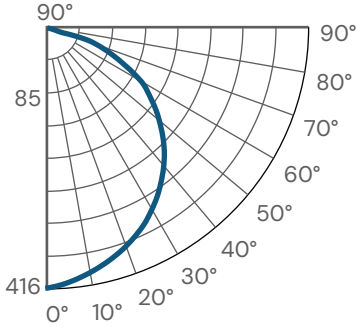


TRACK 3'
FROM WALL



37.1W LED
CCT: 3,074K

DISTANCE FROM CEILING	Single Fixture Performance						Multiple Fixture Performance*								
	0'	1'	2'	3'	4'	5'	4'			5'			6'		
1'	79.7	64.9	38.7	20.3	10.6	5.8	103.8	85.1	103.8	92.5	60.1	92.5	87	42.6	87
2'	66.8	56.6	36.7	20.9	11.6	6.6	93.4	82.6	93.4	81.5	60.4	81.5	75.4	44.3	75.4
3'	44.3	39.1	28	17.7	10.7	6.5	69.5	65.5	69.5	59	49.8	59	53.2	38	53.2
4'	27	24.6	19.1	13.4	8.8	5.7	48.5	47.4	48.5	40.3	37.2	40.3	35.5	29.5	35.5
5'	16.4	15.3	12.7	9.6	6.9	4.8	33.8	33.6	33.8	27.8	26.9	27.8	24	21.9	24
6'	10.3	9.8	8.4	6.8	5.2	3.8	24	24.1	24	19.8	19.5	19.8	16.9	16.2	16.9
7'	6.7	6.4	5.7	4.8	3.9	3	17.5	17.6	17.5	14.5	14.4	14.5	12.3	12.1	12.3
8'	4.5	4.4	4	3.5	2.9	2.4	13.1	13.2	13.1	10.9	10.9	10.9	9.3	9.2	9.3
9'	3.2	3.1	2.9	2.6	2.2	1.9	10	10.1	10	8.4	8.4	8.4	7.2	7.2	7.2

TRACK 4'
FROM WALL




37.1W LED
CCT: 3,074K

DISTANCE FROM CEILING	Single Fixture Performance						Multiple Fixture Performance*								
	0'	1'	2'	3'	4'	5'	4'			5'			6'		
1'	44.6	39.6	28.7	18.4	11.3	6.9	71.2	67.7	71.2	60.3	51.7	60.3	54.1	39.7	54.1
2'	42.3	38.1	28.6	19.1	12.1	7.6	72.3	69	71.3	59.8	53.3	59.8	53.2	41.6	53.2
3'	33.3	30.6	24.1	17	11.4	7.5	61.2	60.2	61.2	50.8	47.4	50.8	44.5	37.7	44.5
4'	23.7	22.2	18.3	13.7	9.7	6.7	48.3	48.1	48.3	39.8	38.4	39.8	34.4	31.2	34.4
5'	16.3	15.4	13.2	10.4	7.8	5.7	36.9	37	36.9	30.3	29.9	30.3	26	24.7	26
6'	11.1	10.6	9.4	7.8	6.4	4.7	27.9	28.1	27.9	23	22.9	23	19.6	19.1	19.6
7'	7.7	7.4	6.7	5.8	4.7	3.8	21.3	21.4	21.3	17.6	17.6	17.6	15	14.9	15
8'	5.4	5.3	4.9	4.3	3.6	3	16.4	16.5	16.4	13.7	13.7	13.7	11.7	11.7	11.7
9'	3.9	3.8	3.6	3.2	2.8	2.4	12.8	12.9	12.8	10.8	10.8	10.8	9.2	9.2	9.2


*Based on a minimum of five luminaires. Light Loss Factor: 1. Values are rounded to nearest 1/10th footcandle.

CANOOPY

Round

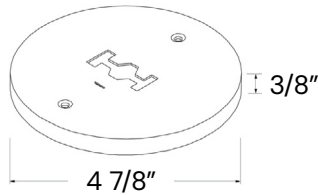

Square

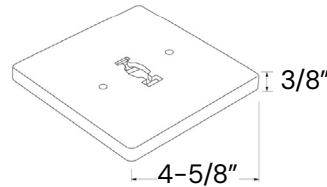

COLOR TEMPERATURE GUIDE

2700K	3000K	3500K	4000K	5000K
WARM WHITE	SOFT WHITE GLOW	NEUTRAL GLOW	COOL WHITE GLOW	DAYLIGHT GLOW
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANTISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
X	✓	✓	✓	X