

FIXTURE SPECIFICATIONS

INTENDED USE


The specification grade 13308 LED Adjustable Track Light delivers direct track lighting to commercial, hospitality and residential interior ceiling track lighting applications. Architecturally styled LED track lights feature small, unobtrusive size and are highly adjustable. Our modern LED track light fixture designs offer excellent illumination, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

PRODUCT FAMILY

- 13000-TC Track Channel
- 13000-LC Linear Connector
- 13000-OA Outlet Adapter
- 13000-SC Slope Ceiling Track Adapter
- 13000-TB T-Bar End Feed
- 13000-FC Floating Canopy Connector
- 13000-EC End Cap
- 13000-LC Live End with Canopy
- 13000-LE Live End
- 13000-L L-Connector
- 13000-T T-Connector
- 13000-X X-Connector
- 13000-MC Mini Connector
- 13000-CP Cord and Plug Connector
- 13000-PA Pendant Adapter
- 13000-CC Conduit Connector
- 13000-CK Conduit Continuation Kit

FEATURES

- Construction:** Solid die-cast aluminum
- Adjustability:** 150° Adjustable Track head with 355° rotation
- Installation:** H-Track is standard; all tracks have adjustable adapters for use with single or two-circuit tracks. *J-Style or L-Style is optional.*
- CRI:** 80+
- LED Life:** 50,000 Hours
- Dimming:** TRIAC and ELV
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)
- Listings:** cULus, RoHS Compliant

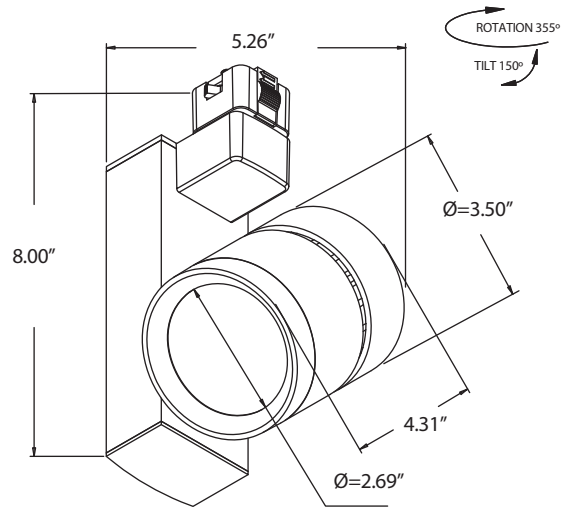

ORDERING INFORMATION Example: (13307-27-BK-H-SP-120)

Model	Wattage Lumen	Color Temp	Finish	Track	Optics	Voltage
13308	29 29W 2200lm	27 2700K	BK Black	H H - Style <small>Standard</small>	SP 19° Spot	120 120V 277 277V
	37 37W 3000lm	30 3000K	WH White	J J - Style	FL 30° Flood	
		35 3500K		L L - Style	WF 45° Wide Flood	
		40 4000K				