

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Lighting for accent, display, toe-kick, wall wash, coves and under cabinets with a high lumen output and integral driver is easier with our architectural-grade lightbar, which includes a color temperature switch. The product, which may also be used for uplighting, suits residential and commercial purposes. Our plug-and-play LED lightbar is dry and damp-listed. The dimmable lighting operates with a run length that's linkable up to 400 watts. The product's Color Rendering Index (CRI) is 90-plus.

INTENDED USE

Mounting: Product comes with 90° swivel bracket, 1 mini coupling & clips included

Finish: White is standard. Bronze is available

Dimensions: 1.1" width x 0.94" height

Voltage: 120V

Lumens: 750 lumens per foot

Wattage: 10W per foot

Color Temperature: 3000K/3500K/4000K selectable switch

Dimming: ELV / TRIAC

Max Run Length: Linkable up to 400W. Includes seamless connector.

Operating Temperature: -10°C ~ 40°C

CRI: 90+


Life: 50,000

Warranty: 5 years carefree for parts & components. (Labor not included)


Listings: cETLus, Title 24/JA8, Energy Star



Under Cabinet Lighting Application

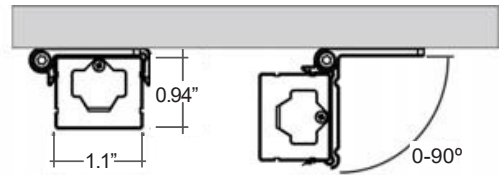

Cove Lighting Application

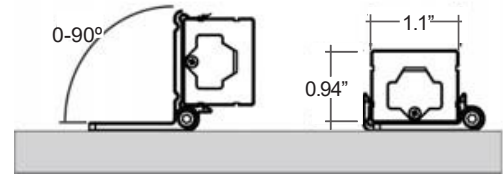

MODEL	14220-12	14220-16	14220-24	14220-32
LENGTH	12"	16"	24"	32"
WATTS	10 W	13 W	20 W	26 W
LUMENS	750lms	950lms	1500lms	2000lms



ORDERING INFORMATION Example: (14220-24-BR-PF)

Model	Length	Finish	Accessories <small>View page 2 for color options</small>
14220	12 12 Inches	WH <small>Standard</small> White	JB Junction Box ¹
	16 16 Inches		
	24 24 Inches	BR Bronze	HC 72" Hardwire Connector
	32 32 Inches		PF 72" Power Feed Cable
			ICxx ² Interlink Cable

¹ Junction Box Dimensions: 6-1/4" x 3-5/8" x 1"
² Please specify length, see pg. 2

ACCESSORIES

JUNCTION BOX | Direct Wire Junction Box With Switch
Dimensions: 6-1/4" x 3-5/8" x 1"



HARDWIRE CONNECTOR | Hardware connector for LBR Series

72" Cable



POWER FEED CABLE | AC Direct Plug-in Cable

72" Cable



INTERLINK CABLE | Allows LBR fixtures to link Together

-6 6" Interlink Cable

-12 12" Interlink Cable

-24 24" Interlink Cable

-72 72" Interlink Cable



COLOR TEMPERATURE GUIDE

2700K	3000K	3500K	4000K	5000K
WARM WHITE	SOFT WHITE GLOW	NEUTRAL GLOW	COOL WHITE GLOW	DAYLIGHT GLOW
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
X	✓	✓	✓	X