

Project Name:

Type:

Quantity:


**FIXTURE SPECIFICATIONS**

**INTENDED USE**

Illuminate exteriors, such as entrances, stairways, walkways, perimeters, parking garages, storage areas and warehouses, from the ceiling with our wet location-rated product. Equipped in non-corrosive, ultraviolet-resistant white or black resin with a white lens and a dimming option.

**FEATURES**

- Dimensions:** 9.375" Diameter x 4.5" Height
- Construction:** Non-corrosive UV-resistant white or black resin with white lens
- CRI:** 120V: 80+, 120-277V: 70+
- Operating Temperature:** -40F to +104F (-40C to +40C)
- Life:** 50,000 hours L70
- Voltage:** 120-277V
- Dimming:** 120V TRIAC dimming option
- Warranty:** 120V: 5 Years carefree for parts & components (labor not included)  
120-277V: 3 Years carefree for parts & components (labor not included)
- Listings:** cETLus listed for wet location, Energy Star rated, Assembled in the USA

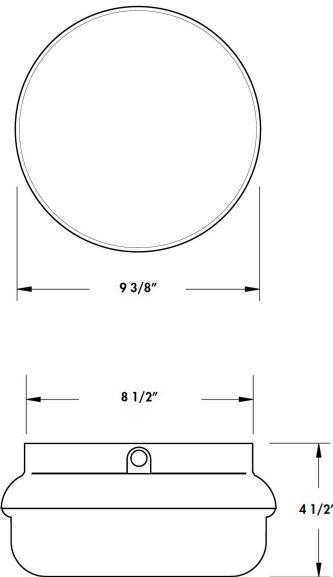

**ORDERING INFORMATION** Example: (16007-23W-40K-BK)

Model	Wattage   Lumens   Dimming   Voltage	Color Temperature	Housing Finish
<b>16007</b>	<b>23W</b> 23 Watts   1900 Lumens   Triac Dimming   120V	<b>30K</b> 3000K	<b>WH</b> White
	<b>22W</b> 22 Watts   1824 Lumens   Non-Dimming   120V- 277V	<b>40K</b> 4000K	<b>BK</b> Black