

Project Name:

Type:

Quantity:





FIXTURE SPECIFICATIONS

INTENDED USE

Our wet location LED wall pack is ideal for commercial-grade outdoor applications with its impact resistant, ultraviolet-protected lens and an IP65 rating protecting the light from water and dust. The curved shape yields ample security lighting throughout building exteriors, outdoor corridors, walkways and stairwells.

DETAILS

- Construction:** High grade, heavy-duty die cast aluminum
- Lens:** Polycarbonate, Impact resistant, UV protected lens
- Voltage:** 100-277V
- Dimming:** 0-10V
- CRI:** 80 CRI
- Life:** 100,000 Hours
- Operating Temperature:** -22°F to 113°F
- Power Factor:** > 0.95
- Warranty:** 10 years Carefree for parts & components (Labor not included)
- Listings:** cULus, IP65, DLC, RoHS, FCC

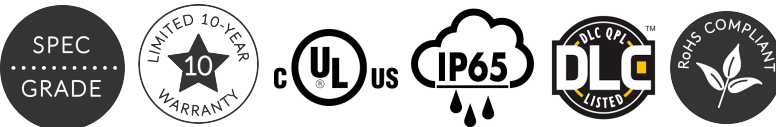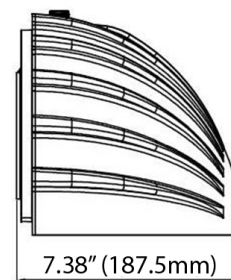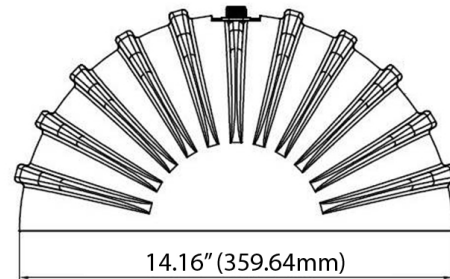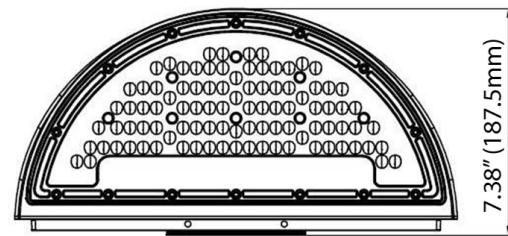

Ordering Information: Example: (16050-70-50K-BR)

Model	Wattage Lumens	Color Temp	Finish	Options
16050	45 45 Watts 5310 Lumens	30K 3000K	WH White	PC Dusk-to-dawn Photocell
	70 70 Watts 8347 Lumens	40K 4000K	SL Silver	
		50K 5000K	BK Black	
			BR Bronze	