

Project Name:

Type:

Quantity:


FIXTURE SPECIFICATIONS

INTENDED USE

The wall-mounted architectural LED sign light features durable, heat-resistant twin lenses and a silicone-sealed gasket for protection against water, moisture, and insects. Designed for efficiency and reliability, this fixture is an ideal solution for illuminating signage with high-quality, energy-efficient lighting.

DETAILS

- Shroud:** W 2.375" x L 6.5" (9.25" fully extended)
- Stem:** Solid brass pipe with 1/2" NPT on bottom
- Construction:** Corrosion-resistant cast brass
- Lens:** Clear and heat-resistant flat glass
- Silicone Gasket:** Weather tight protection
- Mounting:** Standard injection molded spike with 1/2" NPT threaded female hub
- Wiring:** Pre-wired with 3 FT 18-2 direct burial cord
- Electrical:** Remote 12V transformer required
- Voltage:** 12V
- Life:** 50,000 Hours
- Listings:** Limited lifetime warranty on housing and stem. 5 years warranty on LED component

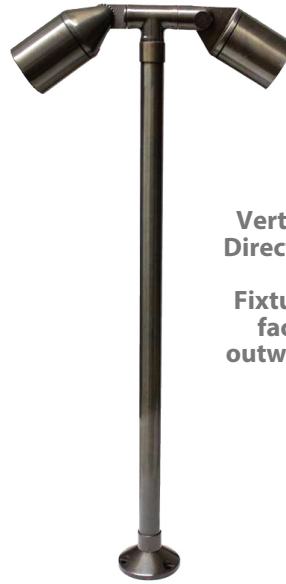

Vertical Direction:

Fixtures face outwards



Horizontal Direction:

Fixtures face forward



ORDERING INFORMATION Example: (9106-TF-W-V-327-24-15-GM)

Model	Direction	Watts Lumens Color Temperature	Stem	Beam Spread	Finish
9106-TF-W	V Vertical	327 (2x) 3.5W 270 2700K	24 24"	15 15° Spot	GM Gun Metal
	H Horizontal	535 (2x) 5W 350 2700K	18 18"	45 45° Flood	
		545 (2x) 5W 450 2700K	12 12"	60 60° Wide Flood	AB Antique Bronze
		547 (2x) 5W 470 3000K			

COLOR TEMPERATURE GUIDE

